



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20


Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

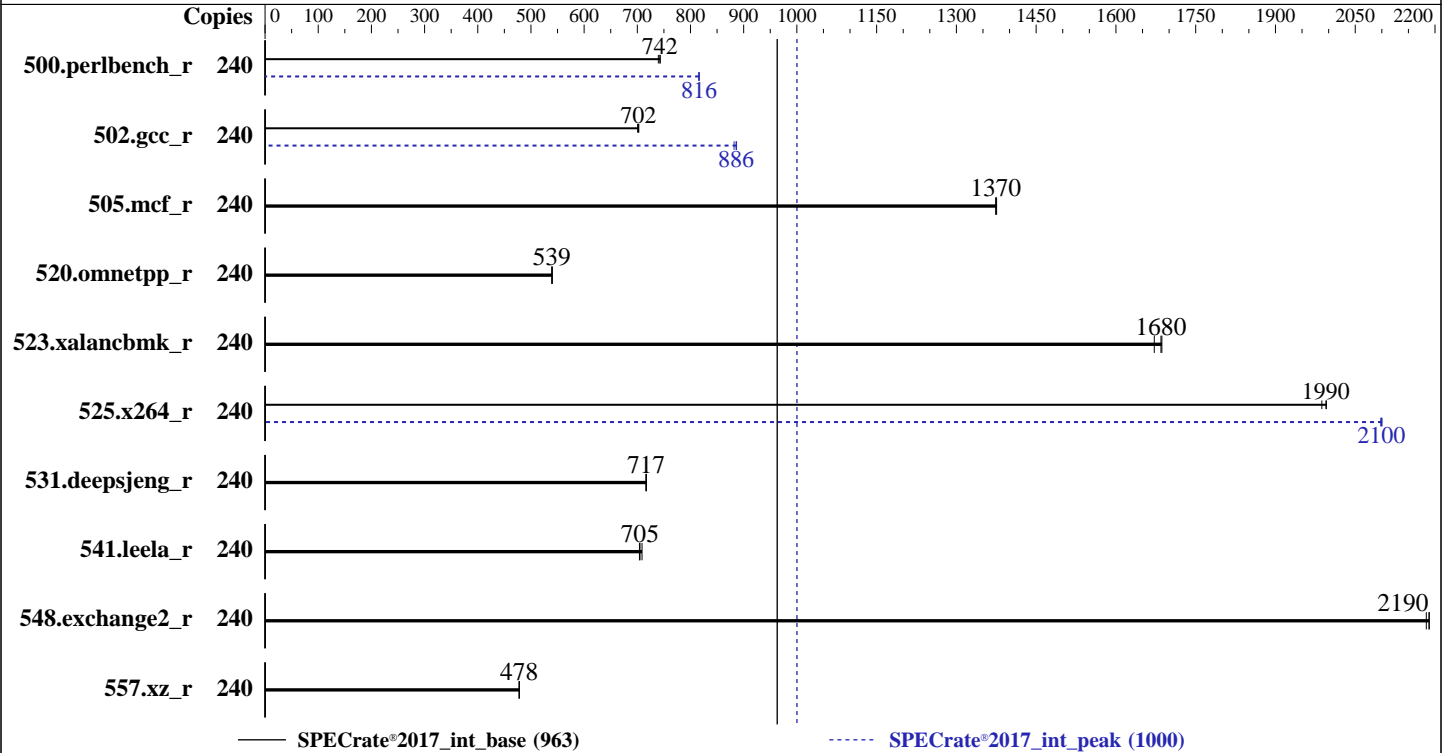

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 120 cores, 2 chips, 2 threads/core
 Orderable: 2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 3.8 TB NVME SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.24.55-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 76.01.105-D released Aug-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	517	740	514	743	515	742	240	468	816	468	816	468	816
502.gcc_r	240	484	703	484	702	485	701	240	385	882	383	887	384	886
505.mcf_r	240	282	1370	282	1370	282	1380	240	282	1370	282	1370	282	1380
520.omnetpp_r	240	583	540	584	539	584	539	240	583	540	584	539	584	539
523.xalancbmk_r	240	152	1670	150	1680	150	1690	240	152	1670	150	1680	150	1690
525.x264_r	240	211	1990	211	1990	211	2000	240	200	2100	200	2100	200	2100
531.deepsjeng_r	240	384	717	384	716	384	717	240	384	717	384	716	384	717
541.leela_r	240	561	709	564	705	565	704	240	561	709	564	705	565	704
548.exchange2_r	240	288	2180	287	2190	287	2190	240	288	2180	287	2190	287	2190
557.xz_r	240	542	478	542	478	542	478	240	542	478	542	478	542	478

SPECrate®2017_int_base = 963

SPECrate®2017_int_peak = 1000

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/lib/ia32:/spec2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github>

Platform Notes

BIOS Configuration:
 Patrol Scrub = Disabled
 SNC = Enable SNC4 (4-clusters)
 ENERGY_PERF_BIAS_CFG mode = Performance
 DCU Streamer Prefetcher = Disabled
 LLC Prefetch = Disabled
 UPI Links Configured with
 CPU0 UPI Port1, Link Disable=Yes
 CPU0 UPI Port2, Link Disable=Yes
 CPU0 UPI Port3, Link Disable=Yes
 CPU1 UPI Port0, Link Disable=Yes
 CPU1 UPI Port2, Link Disable=Yes
 CPU1 UPI Port3, Link Disable=Yes
 BMC Configuration:
 Fan mode set to "FansFullSpeed = True" using redfish command on attribute
 {"Oem":{"Eviden_com":{"FansFullSpeed}}}

Sysinfo program /spec2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on hypnos Mon Jul 31 15:27:05 2023

SUT (System Under Test) info as seen by some common utilities.

 Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux hypnos 5.14.21-150400.24.55-default #1 SMP PREEMPT_DYNAMIC Mon Mar 27 15:25:48 UTC 2023 (cc75cf8)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
15:27:05 up 2 min, 0 users, load average: 0.25, 0.18, 0.08
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124697
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 16384
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124697
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c eval cd $SPEC && ./run_one_rate.sh 3 intrate
runcpu --define default-platform-flags --copies 240 --configfile mesca5.cfg --define smt-on --define
cores=120 --define invoke_with_interleave --define drop_caches --output_format all --nopower --runmode
rate --iterations=3 --reportable --size=ref --tune all intrate
runcpu --define default-platform-flags --copies 240 --configfile mesca5.cfg --define smt-on --define
cores=120 --define invoke_with_interleave --define drop_caches --output_format all --nopower --runmode
rate --iterations 3 --reportable --size ref --tune all --nopower --runmode rate --tune base:peak --size
refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.061/templogs/preenv.intrate.061.0.log
--lognum 061.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

\$SPEC = /spec2017

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 60
siblings       : 120
2 physical ids (chips)
240 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                240
On-line CPU(s) list:   0-239
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):             2
Stepping:              8
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpoperntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             5.6 MiB (120 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

```

L1i cache: 3.8 MiB (120 instances)
L2 cache: 240 MiB (120 instances)
L3 cache: 225 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-14,120-134
NUMA node1 CPU(s): 15-29,135-149
NUMA node2 CPU(s): 30-44,150-164
NUMA node3 CPU(s): 45-59,165-179
NUMA node4 CPU(s): 60-74,180-194
NUMA node5 CPU(s): 75-89,195-209
NUMA node6 CPU(s): 90-104,210-224
NUMA node7 CPU(s): 105-119,225-239
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	112.5M	225M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-14,120-134
node 0 size: 128505 MB
node 0 free: 127881 MB
node 1 cpus: 15-29,135-149
node 1 size: 129016 MB
node 1 free: 128533 MB
node 2 cpus: 30-44,150-164
node 2 size: 128982 MB
node 2 free: 128498 MB
node 3 cpus: 45-59,165-179
node 3 size: 129016 MB
node 3 free: 128526 MB
node 4 cpus: 60-74,180-194
node 4 size: 129016 MB
node 4 free: 128568 MB
node 5 cpus: 75-89,195-209
node 5 size: 129016 MB
node 5 free: 128576 MB
node 6 cpus: 90-104,210-224
node 6 size: 129016 MB
node 6 free: 128598 MB
node 7 cpus: 105-119,225-239
node 7 size: 128629 MB
node 7 free: 128154 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12
6:	21	21	21	21	12	12	10	12
7:	21	21	21	21	12	12	12	10

9. /proc/meminfo

MemTotal: 1055948400 kB

10. who -r

run-level 3 Jul 31 15:25 last=5

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
graphical	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth chronyd cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon appstream-appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiui issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb nvme-fc-autoconnect ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower
generated	jexec
indirect	serial-getty@ wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.24.55-default
root=UUID=378465e1-7420-4951-a4f5-3305656a236f
security=apparmor
crashkernel=338M,high
crashkernel=72M,low
mitigations=auto
console=tty0
console=ttyS0,115200
earlyprintk=ttyS0,115200

```

14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

Supported: yes
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p1  xfs   3.5T   33G  3.5T   1% /spec2017

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          BULL
Product:         BullSequana S series
Product Family:  -
Serial:          XAN-S33-00055

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800
14x Micron MTC40F2046S1RC48BA12 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: BULL
BIOS Version: BIOS_SAR120.76.01.105-D
BIOS Date: 07/14/2023
BIOS Revision: 120.76

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Date: Jul-2023

Test Sponsor: Eviden an Atos technology

Hardware Availability: Jun-2023

Tested by: Bull SAS

Software Availability: Mar-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Sponsor: Eviden an Atos technology

Tested by: Bull SAS

Test Date: Jul-2023

Hardware Availability: Jun-2023

Software Availability: Mar-2023

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

502.gcc_r: -m32

```
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Eviden an Atos technology

SPECrate®2017_int_base = 963

BullSequana SH20 (Intel Xeon Platinum 8490H)

SPECrate®2017_int_peak = 1000

CPU2017 License: 20

Test Date: Jul-2023

Test Sponsor: Eviden an Atos technology

Hardware Availability: Jun-2023

Tested by: Bull SAS

Software Availability: Mar-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/BullSequanaSH-Flags-V1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-31 09:27:05-0400.

Report generated on 2024-01-29 18:10:22 by CPU2017 PDF formatter v6716.

Originally published on 2023-10-10.