



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro


Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

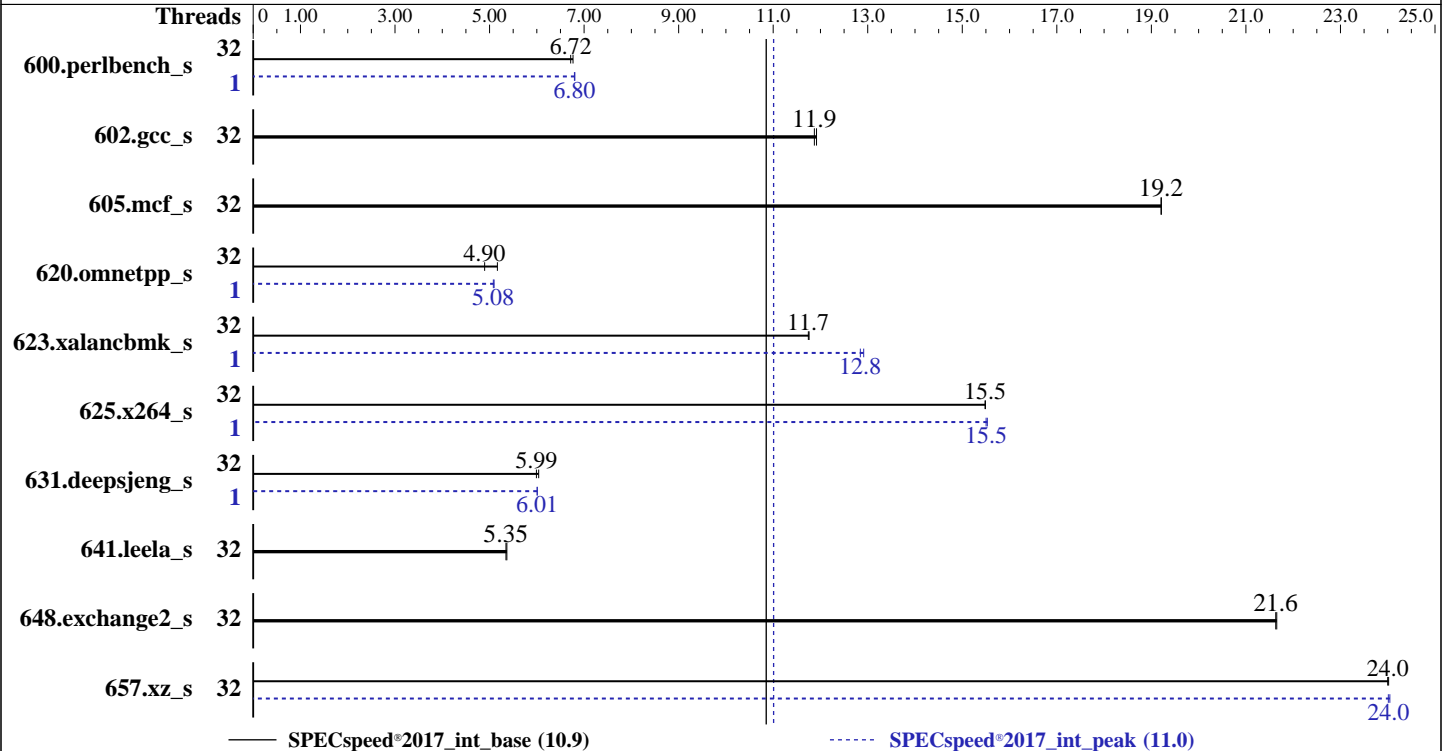

Hardware

CPU Name: AMD EPYC 7303
Max MHz: 3400
Nominal: 2400
Enabled: 32 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 240 GB SATA III SSD
Other: None

Software

OS: Ubuntu 22.04.3 LTS
Kernel 5.15.0-86-generic
Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
Parallel: Yes
Firmware: Version 2.6 released Apr-2023
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	262	6.77	264	6.72			1	261	6.80	261	6.80		
602.gcc_s	32	335	11.9	334	11.9			32	335	11.9	334	11.9		
605.mcf_s	32	246	19.2	246	19.2			32	246	19.2	246	19.2		
620.omnetpp_s	32	316	5.17	333	4.90			1	321	5.08	320	5.10		
623.xalancbmk_s	32	121	11.7	121	11.8			1	110	12.8	110	12.9		
625.x264_s	32	114	15.5	114	15.5			1	114	15.5	114	15.5		
631.deepsjeng_s	32	239	5.99	237	6.04			1	239	6.01	239	6.01		
641.leela_s	32	319	5.35	318	5.37			32	319	5.35	318	5.37		
648.exchange2_s	32	136	21.6	136	21.7			32	136	21.6	136	21.7		
657.xz_s	32	257	24.0	258	24.0			32	257	24.0	257	24.0		

SPECspeed®2017_int_base = **10.9**

SPECspeed®2017_int_peak = **11.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:

```
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 150
Package Power Limit Control = Manual
Package Power Limit = 150
APBDIS = 1
NUMA Nodes Per Socket = NPS2
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

SMT Control = Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-2024s-tr-7303 Fri Oct 20 02:10:04 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux as-2024s-tr-7303 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
02:10:04 up 1 min, 2 users, load average: 1.51, 0.89, 0.34

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
lab	tty1	-	02:09	44.00s	0.22s	0.01s	-bash
lab	pts/0	-	02:09	12.00s	1.23s	0.19s	sudo su -

3. Username
From environment variable \$USER: root
From the command 'logname': lab

4. ulimit -a

time(seconds)	unlimited
file(blocks)	unlimited
data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```
locked memory(kbytes) 2097152
process                4127222
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
sudo su -
sudo su -
su -
-bash
python3 ./run_amd_speed_aocc320_milanx_A1.py
/bin/bash ./amd_speed_aocc320_milanx_A1.sh
runcpu --config amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 intspeed
runcpu --configfile amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 7303 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011d1
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 2560 4K pages
cpu cores      : 16
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-15
physical id 1: apicids 16-31
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 48 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: AuthenticAMD
Model name: AMD EPYC 7303 16-Core Processor
CPU family: 25
Model: 1
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```

Thread(s) per core:      1
Core(s) per socket:     16
Socket(s):               2
Stepping:                1
Frequency boost:        enabled
CPU max MHz:             3435.9370
CPU min MHz:             1500.0000
BogoMIPS:                4800.34
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp
                          lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                          rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe
                          popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                          cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                          topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                          cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                          fsgsbase bmlil avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                          clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsavec cqm_llc
                          cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
                          rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale
                          vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
                          v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid
                          overflow_recov succor smca fsrm

Virtualization:          AMD-V
L1d cache:               1 MiB (32 instances)
L1i cache:               1 MiB (32 instances)
L2 cache:                16 MiB (32 instances)
L3 cache:                128 MiB (8 instances)
NUMA node(s):           4
NUMA node0 CPU(s):      0-7
NUMA node1 CPU(s):      8-15
NUMA node2 CPU(s):      16-23
NUMA node3 CPU(s):      24-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                 Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Mitigation; safe RET
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                      filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:                 Not affected
Vulnerability Tsx async abort:       Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	512K	16M	8	Unified	2	1024	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

```

node 0 size: 257844 MB
node 0 free: 257494 MB
node 1 cpus: 8-15
node 1 size: 257985 MB
node 1 free: 257619 MB
node 2 cpus: 16-23
node 2 size: 258044 MB
node 2 free: 257534 MB
node 3 cpus: 24-31
node 3 size: 258043 MB
node 3 free: 257543 MB
node distances:
node  0  1  2  3
0:  10  12  32  32
1:  12  10  32  32
2:  32  32  10  12
3:  32  32  12  10

```

```

9. /proc/meminfo
MemTotal:      1056684856 kB

```

```

10. who -r
run-level 5 Oct 20 02:08

```

```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
Default Target Status
graphical      running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport
indirect uidd
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-86-generic
root=UUID=d06a341c-7b0d-4f57-aec5-11bd41alc57a
ro

```

```

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

The governor "performance" may decide which speed to use within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2400MHz

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS
-----

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  218G  16G  191G   8% /
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: AS-2024S-TR
Serial: WMF21BS602916

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 2.6
BIOS Date: 04/13/2023
BIOS Revision: 5.22

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

657.xz_s: Same as 625.x264_s

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2023

Hardware Availability: Sep-2023

Software Availability: Sep-2023

Peak Optimization Flags (Continued)

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder-aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder-aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-do-block-reorder-aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false
-mllvm -do-block-reorder-aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECspeed®2017_int_base = 10.9

SPECspeed®2017_int_peak = 11.0

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Peak Optimization Flags (Continued)

631.deepsjeng_s (continued):

-lflang

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-19 22:10:03-0400.
Report generated on 2023-11-07 18:44:27 by CPU2017 PDF formatter v6716.
Originally published on 2023-11-07.