



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

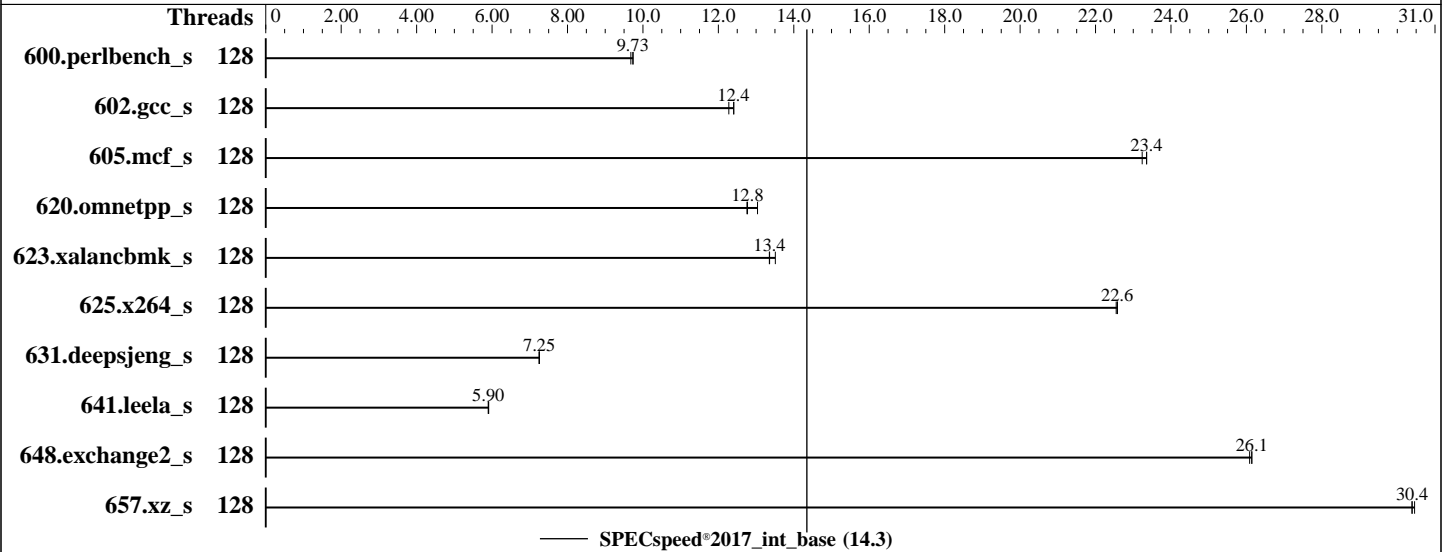

Hardware

CPU Name: Intel Xeon Platinum 8592+
 Max MHz: 3900
 Nominal: 1900
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 140 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 9.3 (Plow)
 5.14.0-362.8.1.el9_3.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 3B05.QCT4T1 released Nov-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	182	9.74	<u>182</u>	<u>9.73</u>	183	9.68							
602.gcc_s	128	<u>321</u>	<u>12.4</u>	321	12.4	324	12.3							
605.mcf_s	128	<u>202</u>	<u>23.4</u>	202	23.4	203	23.2							
620.omnetpp_s	128	128	12.8	125	13.0	<u>128</u>	<u>12.8</u>							
623.xalancbmk_s	128	105	13.5	106	13.4	<u>106</u>	<u>13.4</u>							
625.x264_s	128	78.1	22.6	<u>78.1</u>	<u>22.6</u>	78.2	22.5							
631.deepsjeng_s	128	198	7.25	<u>198</u>	<u>7.25</u>	198	7.26							
641.leela_s	128	289	5.90	289	5.91	<u>289</u>	<u>5.90</u>							
648.exchange2_s	128	112	26.1	113	26.1	<u>112</u>	<u>26.1</u>							
657.xz_s	128	203	30.5	203	30.4	<u>203</u>	<u>30.4</u>							

SPECspeed®2017_int_base = 14.3

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/lib/ia32:/root/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes

BIOS Configuration

Enable LP [Global] set to Single LP
Patrol Scrub set to Disabled
SNC set to Enable SNC2 (2-clusters)
LLC dead line alloc set to Disable
Hardware P-States set to Disable

Sysinfo program /root/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Dec 4 18:55:23 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-362.8.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Oct 3 11:12:36 EDT 2023
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
18:55:23 up 3 min, 2 users, load average: 0.13, 0.11, 0.04
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 18:52 59.00s 0.81s 0.00s /bin/bash ./test.sh
root tty2 18:54 27.00s 0.01s 0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

core file size          (blocks, -c) 0
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4124231
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 4124231
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./test.sh
/bin/bash ./test.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base --output_format all
  --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base --size refspeed
  intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
  --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 64
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8592+
CPU family:            6
Model:                 207
Thread(s) per core:   1
Core(s) per socket:   64
Socket(s):             2
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           1901.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                        avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
NUMA node2 CPU(s):    64-95
NUMA node3 CPU(s):    96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability Lltf:                Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-31
node 0 size: 257004 MB
node 0 free: 255722 MB
node 1 cpus: 32-63
node 1 size: 258039 MB
node 1 free: 257497 MB
node 2 cpus: 64-95
node 2 size: 258039 MB
node 2 free: 257465 MB
node 3 cpus: 96-127
node 3 size: 258034 MB
node 3 free: 257271 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1055864824 kB

10. who -r

run-level 3 Dec 4 18:52

11. Systemd service manager version: systemd 252 (252-18.el9)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
enabled-runtime rc-local systemd-remount-fs
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

disabled      arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
               dbus-daemon debug-shell dnf-system-upgrade dnsmasq firewalld gssproxy hwloc-dump-hwdata
               iprdump iprinit iprupdate ipsec iscsid iscsiuiio kpatch kvm_stat ledmon
               man-db-restart-cache-update netavark-dhcp-proxy nfs-blkmap nfs-server nftables
               nvmmf-autoconnect ostree-readonly-sysroot-migration pesign podman podman-auto-update
               podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd
               rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
               speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
               systemd-sysexec wpa_supplicant
indirect      spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
               systemd-sysupdate systemd-sysupdate-reboot

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd5,gpt2)/vmlinuz-5.14.0-362.8.1.el9_3.x86_64
    root=UUID=927e9c60-83aa-4bd3-a6a1-d5575fd7decf
    ro
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
    resume=UUID=73cb0af2-a507-470d-a660-3c72e03cac37
    nomodeset
    rhgb
    quiet
    selinux=0

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 1.90 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes

```

```

-----
15. tuned-adm active
    Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release Red Hat Enterprise Linux release 9.3 (Plow)
system-release Red Hat Enterprise Linux release 9.3 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /root/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda3   xfs   98G   22G   77G   22% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Quanta Cloud Technology Inc.
Product:     QuantaGrid D54Q-2U
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     3B05.QCT4T1
BIOS Date:        11/06/2023
BIOS Revision:    5.32
Firmware Revision: 3.57
-----
```

Compiler Version Notes

```
=====
C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_int_base = 14.3

D54Q-2U (Intel Xeon Platinum 8592+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.3.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.3.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-04 05:55:22-0500.

Report generated on 2023-12-20 13:13:37 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-20.