



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 172

## PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573


Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

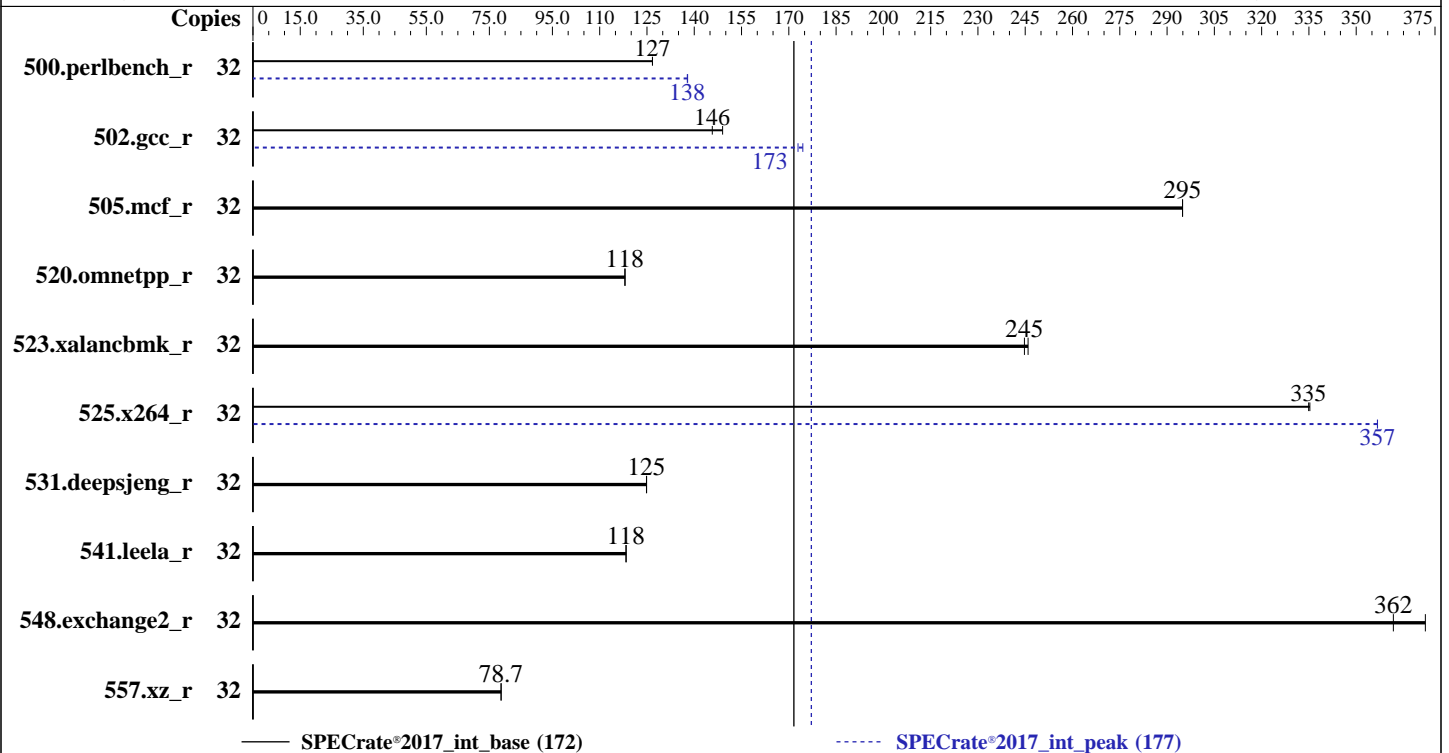

### Hardware

CPU Name: Intel Xeon Silver 4509Y  
 Max MHz: 4100  
 Nominal: 2600  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)  
 Storage: 50 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.9.10 released Oct-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	402	127	<b>402</b>	<b>127</b>			32	<b>370</b>	<b>138</b>	369	138		
502.gcc_r	32	<b>311</b>	<b>146</b>	304	149			32	260	174	<b>262</b>	<b>173</b>		
505.mcf_r	32	<b>175</b>	<b>295</b>	175	295			32	<b>175</b>	<b>295</b>	175	295		
520.omnetpp_r	32	356	118	<b>356</b>	<b>118</b>			32	356	118	<b>356</b>	<b>118</b>		
523.xalancbmk_r	32	<b>138</b>	<b>245</b>	137	246			32	<b>138</b>	<b>245</b>	137	246		
525.x264_r	32	167	335	<b>167</b>	<b>335</b>			32	<b>157</b>	<b>357</b>	157	357		
531.deepsjeng_r	32	<b>294</b>	<b>125</b>	294	125			32	<b>294</b>	<b>125</b>	294	125		
541.leela_r	32	<b>448</b>	<b>118</b>	447	118			32	<b>448</b>	<b>118</b>	447	118		
548.exchange2_r	32	225	372	<b>232</b>	<b>362</b>			32	225	372	<b>232</b>	<b>362</b>		
557.xz_r	32	<b>439</b>	<b>78.7</b>	439	78.7			32	<b>439</b>	<b>78.7</b>	439	78.7		

SPECrate®2017\_int\_base = 172

SPECrate®2017\_int\_peak = 177

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 50 GB ramdisk created with the cmd: "mount -t tmpfs -o size=50G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
DCU Streamer Prefetcher : Disabled  
Sub NUMA Cluster : 2-way Clustering  
LLC Prefetch : Disabled  
Dead Line LLC Alloc : Disabled  
Optimizer Mode : Enabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Dec 12 22:12:26 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
22:12:26 up 2 min, 1 user, load average: 0.32, 0.16, 0.05
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1      -             22:10       1:30        0.98s     0.00s     /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126262
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126262
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 intrate
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

```

runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) SILVER 4509Y
vendor_id      : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b0004d0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) SILVER 4509Y
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
Stepping:               8
CPU max MHz:            4100.0000
CPU min MHz:            800.0000
BogoMIPS:               5200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pbs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 172

## PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Dec-2023  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_ld arch_capabilities
768 KiB (16 instances)
L1d cache:
L1i cache: 512 KiB (16 instances)
L2 cache: 32 MiB (16 instances)
L3 cache: 45 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,6,12,20,22,26,28
NUMA node1 CPU(s): 2,8,10,14,16,18,24,30
NUMA node2 CPU(s): 1,7,13,15,17,23,29,31
NUMA node3 CPU(s): 3,5,9,11,19,21,25,27
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,6,12,20,22,26,28
node 0 size: 257498 MB
node 0 free: 246679 MB
node 1 cpus: 2,8,10,14,16,18,24,30
node 1 size: 258045 MB
node 1 free: 257656 MB
node 2 cpus: 1,7,13,15,17,23,29,31
node 2 size: 258045 MB
node 2 free: 257474 MB
node 3 cpus: 3,5,9,11,19,21,25,27
node 3 size: 257999 MB
node 3 free: 257489 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 1056347116 kB

10. who -r  
run-level 3 Dec 12 22:10

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections postfix purge-kernels rollback sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask nvme-autoconnect rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=aalffe9d-5851-4d06-be29-02be8b9d35b8  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.10 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. tuned-adm active  
Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on
tmpfs      tmpfs  50G  5.1G  45G  11% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge
Serial:      SL6C201

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 00CE063200CE M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.9.10

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

BIOS Date: 10/12/2023  
BIOS Revision: 1.9

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 172

PowerEdge C6620 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 177

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-12 22:12:26-0500.

Report generated on 2024-01-03 17:33:53 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.