



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix


SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

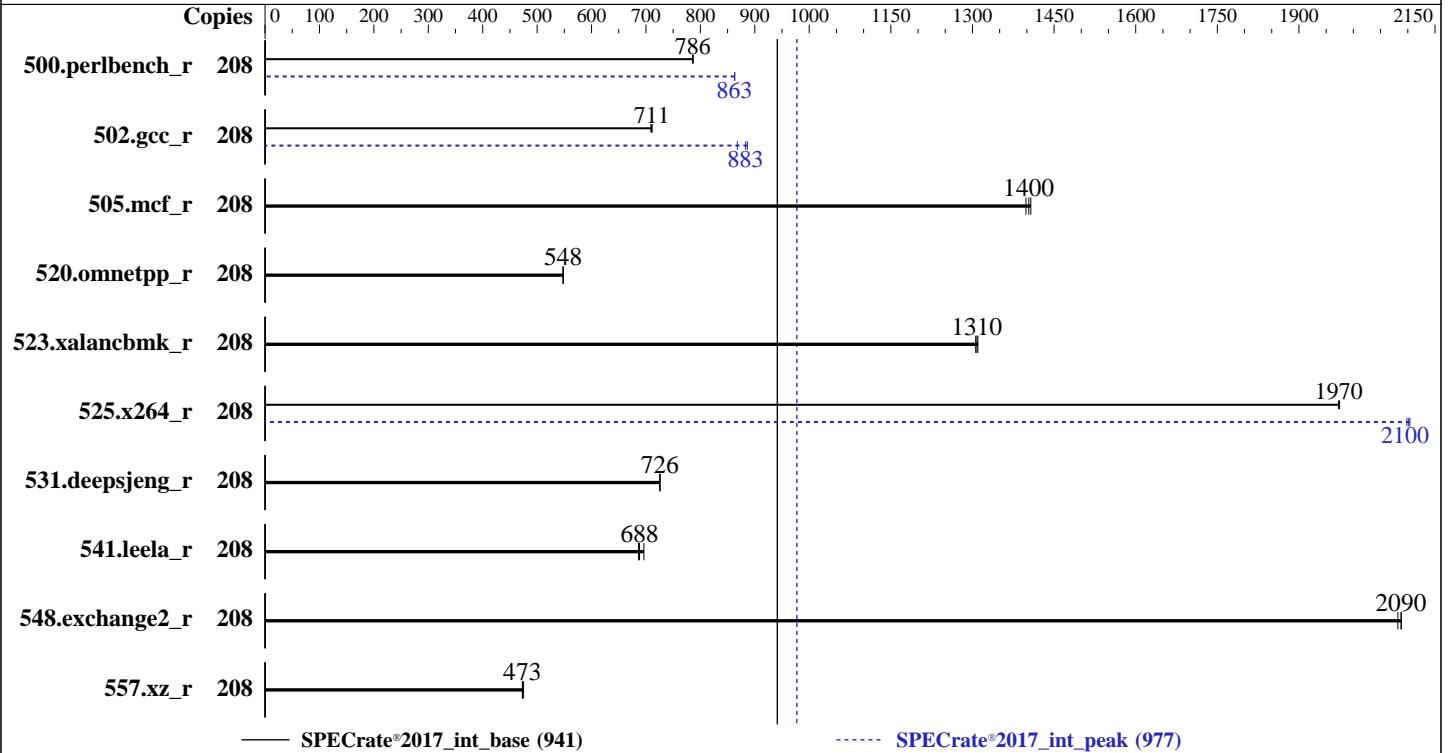

Hardware

CPU Name: Intel Xeon Platinum 8470Q
Max MHz: 3800
Nominal: 2100
Enabled: 104 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 960 GB NVME SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
5.14.0-70.22.1.el9_0.x86_64
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Nettrix BIOS Version NNH1041060 released Sep-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	421	786	421	786	421	787	208	384	863	384	863	384	863
502.gcc_r	208	415	709	415	711	414	711	208	339	868	333	883	332	886
505.mcf_r	208	239	1410	239	1400	240	1400	208	239	1410	239	1400	240	1400
520.omnetpp_r	208	498	548	498	548	498	548	208	498	548	498	548	498	548
523.xalancbmk_r	208	168	1310	168	1310	168	1310	208	168	1310	168	1310	168	1310
525.x264_r	208	184	1970	185	1970	185	1970	208	173	2100	174	2100	173	2100
531.deepsjeng_r	208	328	726	329	726	329	725	208	328	726	329	726	329	725
541.leela_r	208	501	688	495	696	502	686	208	501	688	495	696	502	686
548.exchange2_r	208	261	2090	262	2080	261	2090	208	261	2090	262	2080	261	2090
557.xz_r	208	473	475	475	473	475	473	208	473	475	475	473	475	473

SPECrate®2017_int_base = **941**

SPECrate®2017_int_peak = **977**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/tzk/SPECcpu/lib/intel64:/home/tzk/SPECcpu/lib/ia32:/home/tzk/SPECcpu/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

SNC (Sub NUMA) set to Enable SNC4 (4-clusters)
Patrol Scrub set to Disabled
LLC dead line alloc set to Disabled
DCU Streamer Prefetcher set to Disabled
Hardware P-States set to Native Mode

Sysinfo program /home/tzk/SPECcpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Dec 18 22:24:11 2023

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. Systemd service manager version: systemd 250 (250-6.el9_0)
11. Failed units, from systemctl list-units --state=failed
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
22:24:11 up 18:12, 1 user, load average: 0.25, 4.26, 58.69
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root :1 04:12 ?xdm? 16:27 0.00s /usr/libexec/gdm-x-session --register-session --run-script
gnome-session

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124447
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124447
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=104 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.437/templogs/preenv.intrate.437.0.log --lognum 437.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/tzk/SPECcpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8470Q
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0004d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 52
siblings       : 104
2 physical ids (chips)
208 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids 0-103
physical id 1: apicids 128-231
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 208
On-line CPU(s) list:   0-207
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8470Q
BIOS Model name:       Intel(R) Xeon(R) Platinum 8470Q
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    52
Socket(s):              2
Stepping:               8
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
                        hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                        vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             4.9 MiB (104 instances)
L1i cache:             3.3 MiB (104 instances)
L2 cache:              208 MiB (104 instances)
L3 cache:              210 MiB (2 instances)
NUMA node(s):          8
NUMA node0 CPU(s):    0-12,104-116
NUMA node1 CPU(s):    13-25,117-129
NUMA node2 CPU(s):    26-38,130-142
NUMA node3 CPU(s):    39-51,143-155
NUMA node4 CPU(s):    52-64,156-168
NUMA node5 CPU(s):    65-77,169-181
NUMA node6 CPU(s):    78-90,182-194
NUMA node7 CPU(s):    91-103,195-207
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-12,104-116
node 0 size: 128099 MB
node 0 free: 126517 MB
node 1 cpus: 13-25,117-129
node 1 size: 129018 MB
node 1 free: 127740 MB
node 2 cpus: 26-38,130-142
node 2 size: 129018 MB
node 2 free: 127581 MB
node 3 cpus: 39-51,143-155
node 3 size: 129018 MB
node 3 free: 127164 MB
node 4 cpus: 52-64,156-168
node 4 size: 129018 MB
node 4 free: 127797 MB
node 5 cpus: 65-77,169-181
node 5 size: 129018 MB
node 5 free: 127838 MB
node 6 cpus: 78-90,182-194
node 6 size: 128981 MB
node 6 free: 127817 MB
node 7 cpus: 91-103,195-207
node 7 size: 128998 MB
node 7 free: 127830 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1055920036 kB

'who -r' did not return a run level

10. Systemd service manager version: systemd 250 (250-6.e19_0)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

Default Target Status
graphical starting

11. Failed units, from systemctl list-units --state=failed

```
UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
gdm getty@ insights-client-boot iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount pcmd pmie pmlgger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5
smartd sshd sssd switcheroo-control sysstat systemd-network-generator tuned udisks2 upower
vgauthd virtqemud vmtoolsd

enabled-runtime systemd-remount-fs
disabled      arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty containerd cpupower
cups-browsed dbus-daemon debug-shell dnsmasq docker dovecot fancontrol fcoe grafana-server
gssproxy httpd httpd@ ibacm iprdump iprint iprupdate ipsec irqbalance iscsid iscsiui
kpatch kvm_stat ledmon libvirt-guests libvirt lldpad man-db-restart-cache-update named
named-chroot nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect pmfind pmie_farm
pmlgger_farm pmproxy postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm
rhsm-facts rpmdm-rebuild rrdcached saslauthd serial-getty@ smb snmpd snmptrapd
spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysex target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevid virtnwfilterd
virtproxyd virtsecret virtstoraged vsftpd wpa_supplicant

indirect      pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
virtlockd virtlogd vsftpd@
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
intel_iommu=on,sm_on
```

14. cpupower frequency-info

```
analyzing CPU 24:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

Current active profile: throughput-performance

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
-----
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
-----
20. Disk information
SPEC is set to: /home/tzk/SPECcpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  819G  95G  724G  12% /home
-----
21. /sys/devices/virtual/dmi/id
Vendor:          Nettrix
Product:         R620 G50
Product Family:  Rack
Serial:          6101810603447811

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041060
BIOS Date: 09/18/2023
BIOS Revision: 5.31

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Dec-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

502.gcc_r: -m32

```
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017_int_base = 941

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_peak = 977

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Dec-2023

Hardware Availability: Jan-2023

Software Availability: Jan-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-18 22:24:10-0500.

Report generated on 2024-01-16 17:16:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-16.