



# SPEC CPU®2017 Integer Rate Result


Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

**SPECrate®2017\_int\_base = 619**  
**SPECrate®2017\_int\_peak = 646**

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

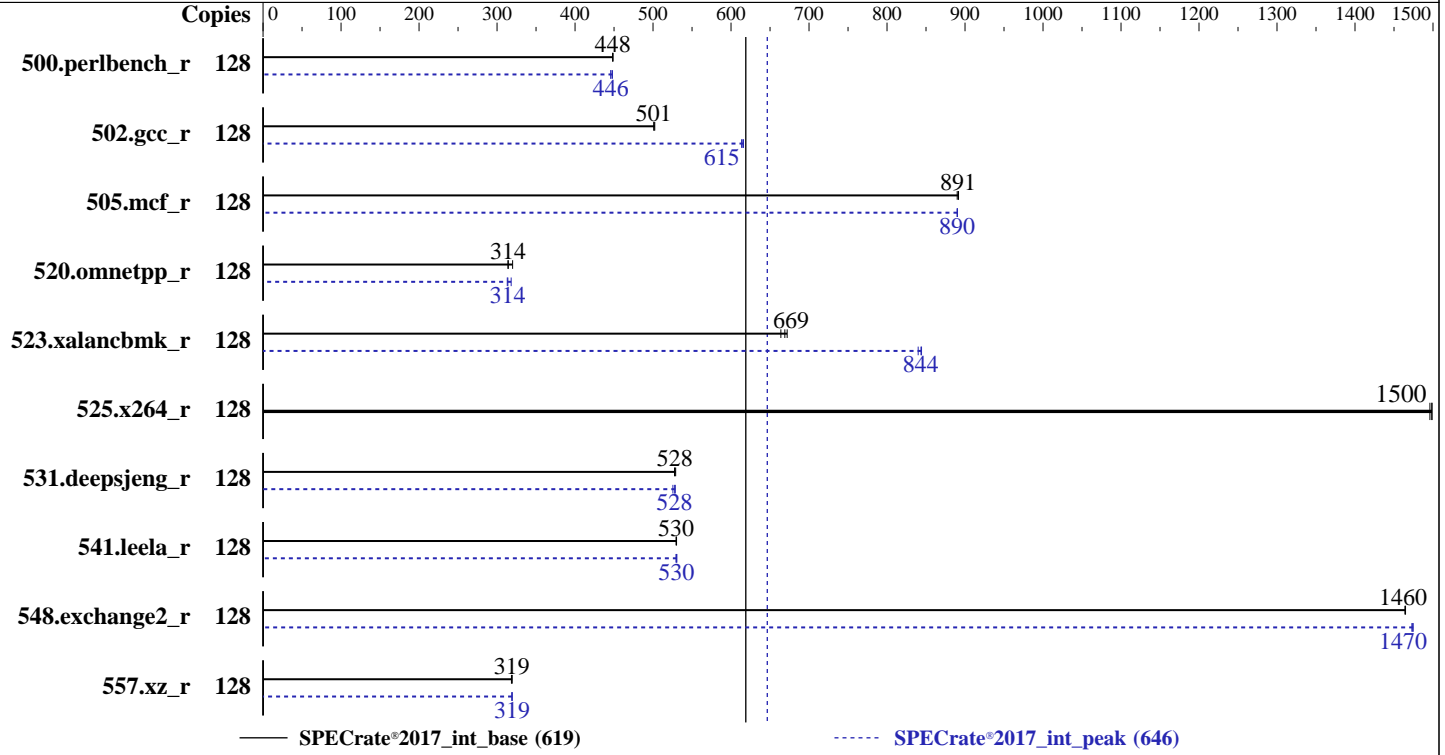

### Hardware

CPU Name: AMD EPYC 9334  
Max MHz: 3900  
Nominal: 2700  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1 TB NVMe  
Other: None

### Software

OS: Ubuntu 20.04.4 LTS  
kernel version 5.15.0-92-generic  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: No  
Firmware: Version 1.6 released Nov-2023  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Jan-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	454	448	454	448	<b>454</b>	<b>448</b>	128	457	446	<b>457</b>	<b>446</b>	455	448
502.gcc_r	128	361	502	362	501	<b>362</b>	<b>501</b>	128	294	616	295	614	<b>295</b>	<b>615</b>
505.mcf_r	128	<b>232</b>	<b>891</b>	232	890	232	892	128	232	890	232	890	<b>232</b>	<b>890</b>
520.omnetpp_r	128	<b>534</b>	<b>314</b>	525	320	535	314	128	536	313	<b>535</b>	<b>314</b>	528	318
523.xalancbmk_r	128	204	664	201	672	<b>202</b>	<b>669</b>	128	160	844	<b>160</b>	<b>844</b>	161	840
525.x264_r	128	150	1500	<b>150</b>	<b>1500</b>	150	1500	128	150	1500	<b>150</b>	<b>1500</b>	150	1500
531.deepsjeng_r	128	<b>278</b>	<b>528</b>	278	528	277	529	128	278	529	<b>278</b>	<b>528</b>	279	525
541.leela_r	128	400	530	<b>400</b>	<b>530</b>	400	530	128	400	531	400	529	<b>400</b>	<b>530</b>
548.exchange2_r	128	229	1460	<b>229</b>	<b>1460</b>	229	1460	128	228	1470	<b>228</b>	<b>1470</b>	227	1470
557.xz_r	128	433	319	434	318	<b>433</b>	<b>319</b>	128	433	319	<b>433</b>	<b>319</b>	433	319

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"  
MALLOCONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOCONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

NUMA Nodes Per Socket = NPS4  
Determinism Control = Manual  
Determinism Enable = Disable Performance Determinism  
cTDP Control = Manual  
cTDP = 240  
Package Power Limit Control = Manual  
Package Power Limit = 240

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd2-Super-Server Mon Jan 29 13:43:52 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Platform Notes (Continued)

18. Disk information

19. /sys/devices/virtual/dmi/id

20. dmidecode

21. BIOS

1. uname -a

```
Linux amd2-Super-Server 5.15.0-92-generic #102~20.04.1-Ubuntu SMP Mon Jan 15 13:09:14 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
```

2. w

```
13:43:52 up 3 min, 1 user, load average: 0.24, 0.41, 0.19
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
amd2      tty1    -             13:01       6.00s      1.45s      0.04s      -bash
```

3. Username

From environment variable \$USER: amd2

4. ulimit -a

```
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            4126749
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio            0
```

5. sysinfo process ancestry

```
/sbin/init splash
/bin/login -p --
-bash
su
bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9334 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa10113e
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Platform Notes (Continued)

```
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.34:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          52 bits physical, 57 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          2
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  17
Model name:             AMD EPYC 9334 32-Core Processor
Stepping:               1
Frequency boost:        enabled
CPU MHz:                1500.000
CPU max MHz:           3910.2529
CPU min MHz:           1500.0000
BogoMIPS:               5399.84
Virtualization:         AMD-V
L1d cache:              2 MiB
L1i cache:              2 MiB
L2 cache:               64 MiB
L3 cache:               256 MiB
NUMA node0 CPU(s):     0-31,64-95
NUMA node1 CPU(s):     32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Platform Notes (Continued)

```
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	2M	8	Data	1
L1i	32K	2M	8	Instruction	1
L2	1M	64M	8	Unified	2
L3	32M	256M	16	Unified	3

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 515776 MB
node 0 free: 513886 MB
node 1 cpus: 32-63,96-127
node 1 size: 515986 MB
node 1 free: 514502 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

9. /proc/meminfo

```
MemTotal: 1056524972 kB
```

10. who -r

```
run-level 3 Jan 29 13:01
```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

## Platform Notes (Continued)

```

unattended-upgrades whoopsie wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@
rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
wpa_supplicant-wired@ wpa_supplicant@
generated apport ipmidrv openipmi
indirect display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-92-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
splash
vt.handoff=7

```

```

-----
14. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

## Platform Notes (Continued)

-----  
17. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 20.04.4 LTS  
-----

18. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 ext4 938G 20G 871G 3% /  
-----

19. /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero SDA200A2N-18  
Product Family: SMC H13  
Serial: A509935X3C01325  
-----

20. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x NO DIMM NO DIMM  
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800  
-----

21. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.6  
BIOS Date: 11/16/2023  
BIOS Revision: 5.27  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----  
=====

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

## Compiler Version Notes (Continued)

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Jan-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Jan-2024

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-faggressive-loop-transform -fvector-transform
-fscalar-transform -lamdlibm -lflang -lamdalloc
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

```
525.x264_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Peak Optimization Flags (Continued)

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
( Tyrone Camarero SDA200A2N-18)  
(2.70 GHz, AMD EPYC 9334)

SPECrate®2017\_int\_base = 619

SPECrate®2017\_int\_peak = 646

**CPU2017 License:** 6042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Jan-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Jan-2024

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-29 03:13:51-0500.  
Report generated on 2024-02-28 19:09:27 by CPU2017 PDF formatter v6716.  
Originally published on 2024-02-27.