



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 169

### PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573


Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

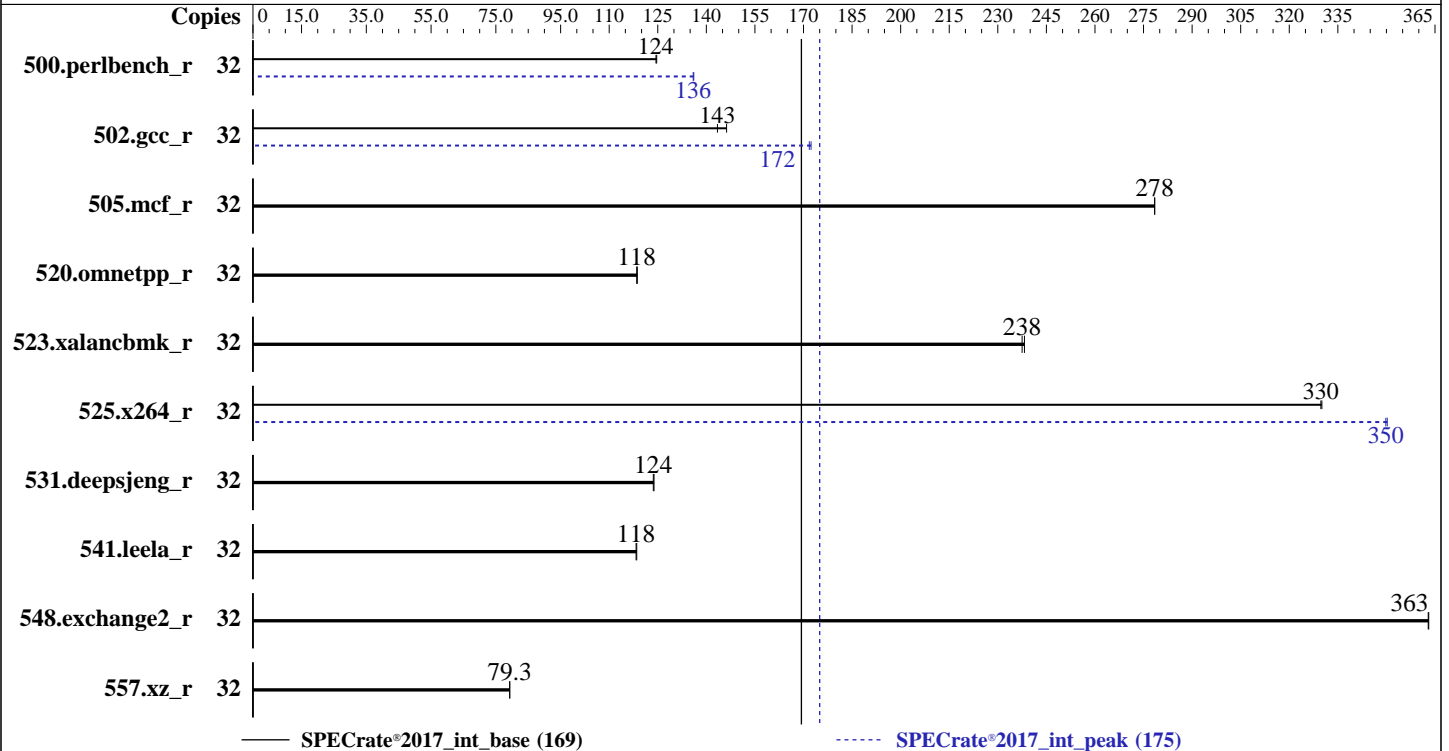

### Hardware

CPU Name: Intel Xeon Silver 4509Y  
 Max MHz: 4100  
 Nominal: 2600  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 22.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)  
 Storage: 125 GB on tmpfs  
 Other: Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.0.0 released Nov-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	409	125	<b>409</b>	<b>124</b>			32	374	136	<b>375</b>	<b>136</b>		
502.gcc_r	32	<b>316</b>	<b>143</b>	310	146			32	<b>264</b>	<b>172</b>	263	172		
505.mcf_r	32	186	278	<b>186</b>	<b>278</b>			32	186	278	<b>186</b>	<b>278</b>		
520.omnetpp_r	32	<b>354</b>	<b>118</b>	354	119			32	<b>354</b>	<b>118</b>	354	119		
523.xalancbmk_r	32	<b>142</b>	<b>238</b>	142	238			32	<b>142</b>	<b>238</b>	142	238		
525.x264_r	32	170	330	<b>170</b>	<b>330</b>			32	160	350	<b>160</b>	<b>350</b>		
531.deepsjeng_r	32	<b>297</b>	<b>124</b>	296	124			32	<b>297</b>	<b>124</b>	296	124		
541.leela_r	32	447	119	<b>448</b>	<b>118</b>			32	447	119	<b>448</b>	<b>118</b>		
548.exchange2_r	32	<b>231</b>	<b>363</b>	231	363			32	<b>231</b>	<b>363</b>	231	363		
557.xz_r	32	436	79.3	<b>436</b>	<b>79.3</b>			32	436	79.3	<b>436</b>	<b>79.3</b>		

SPECrate®2017\_int\_base = 169

SPECrate®2017\_int\_peak = 175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled  
  
Virtualization Technology : Disabled  
DCU Streamer Prefetcher : Disabled  
Sub NUMA Cluster : 2-way Clustering  
LLC Prefetch : Disabled  
Dead Line LLC Alloc : Disabled  
  
System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jan 24 17:15:29 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS

1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
17:15:30 up 12 min, 1 user, load average: 1.65, 6.65, 5.62  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttyl - 17:03 12:08 0.98s 0.01s /bin/bash ./dell-run-speccpu.sh rate  
--define DL-BIOSinc=Dell-BIOS\_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output\_format html,pdf,txt

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4124487  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4124487  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 34  
login -- root  
-bash  
/bin/bash ./DELL\_rate.sh  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS\_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output\_format html,pdf,txt  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS\_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output\_format html,pdf,txt  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak -o all --define DL-BIOS-SNC=2  
--iterations 2 --define DL-BIOSinc=Dell-BIOS\_Xeon-5.inc --define DL-BIOS-LogProc=1 --define  
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output\_format html,pdf,txt intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) SILVER 4509Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) SILVER 4509Y
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
Stepping: 8
CPU max MHz: 4100.0000
CPU min MHz: 800.0000
BogoMIPS: 5200.00
Flags: fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
lm_constant_tsc_art_arch_perfmon_pebs_bts_rep_good_nopl_xtopology
nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_monitor
ds_cpl_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdcn_pcid_dca_sse4_1_sse4_2
x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm
abm_3dnowprefetch_cpuid_fault_epb_cat_13_cat_12_cdp_13_invpnid_single
cdp_12_ssbd_mba_ibrs_ibpb_stibp_ibrs_enhanced_fsgsbase_tsc_adjust_bmi1_hle
avx2_smep_bmi2_erms_invpnid_rtm_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap
avx512ifma_clflushopt_clwb_intel_pt_avx512cd_sha_ni_avx512bw_avx512vl
xsaveopt_xsavec_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

cqm\_mbm\_local split\_lock\_detect avx\_vnni avx512\_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri movdir64b enqcmd fsrm md\_clear serialize tsxldtrk pconfig arch\_lbr avx512\_fp16 amx\_tile flush\_lld arch\_capabilities

Lld cache: 768 KiB (16 instances)  
Lli cache: 512 KiB (16 instances)  
L2 cache: 32 MiB (16 instances)  
L3 cache: 45 MiB (2 instances)  
NUMA node(s): 4  
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28  
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30  
NUMA node2 CPU(s): 1,5,9,11,17,21,25,27  
NUMA node3 CPU(s): 3,7,13,15,19,23,29,31  
Vulnerability Itlb multihit: Not affected  
Vulnerability Lltf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	768K	12	Data	1	64	1	64
Lli	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0,4,8,12,16,20,24,28  
node 0 size: 257426 MB  
node 0 free: 256981 MB  
node 1 cpus: 2,6,10,14,18,22,26,30  
node 1 size: 258045 MB  
node 1 free: 257693 MB  
node 2 cpus: 1,5,9,11,17,21,25,27  
node 2 size: 258011 MB  
node 2 free: 249219 MB  
node 3 cpus: 3,7,13,15,19,23,29,31  
node 3 size: 257667 MB  
node 3 free: 257254 MB  
node distances:  
node 0 1 2 3  
0: 10 12 21 21  
1: 12 10 21 21  
2: 21 21 10 12  
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1055898832 kB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

10. who -r  
run-level 3 Jan 24 17:03

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@  
irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd  
nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore  
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm  
grub2-once haveged haveged-switch-root instsvcdrv ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rpcbind  
rpmconfigcheck rsyncd serial-getty@ smartd\_generate\_opts snmpd snmptrapd  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd vncserver@  
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=a2071361-7500-4d59-ac2e-a3222a0598a9  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=366M,high  
crashkernel=72M,low

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.10 GHz.  
The governor "powersave" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  4.1G 121G   4% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge R760xd2
Product Family: PowerEdge
Serial:         1234567

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x 00CE069D00CE M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     2.0.0

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jan-2024  
Hardware Availability: Nov-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

BIOS Date: 11/23/2023  
BIOS Revision: 2.0

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 169

PowerEdge R760xd2 (Intel Xeon Silver 4509Y)

SPECrate®2017\_int\_peak = 175

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-24 12:15:29-0500.

Report generated on 2024-02-28 19:22:32 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.