



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

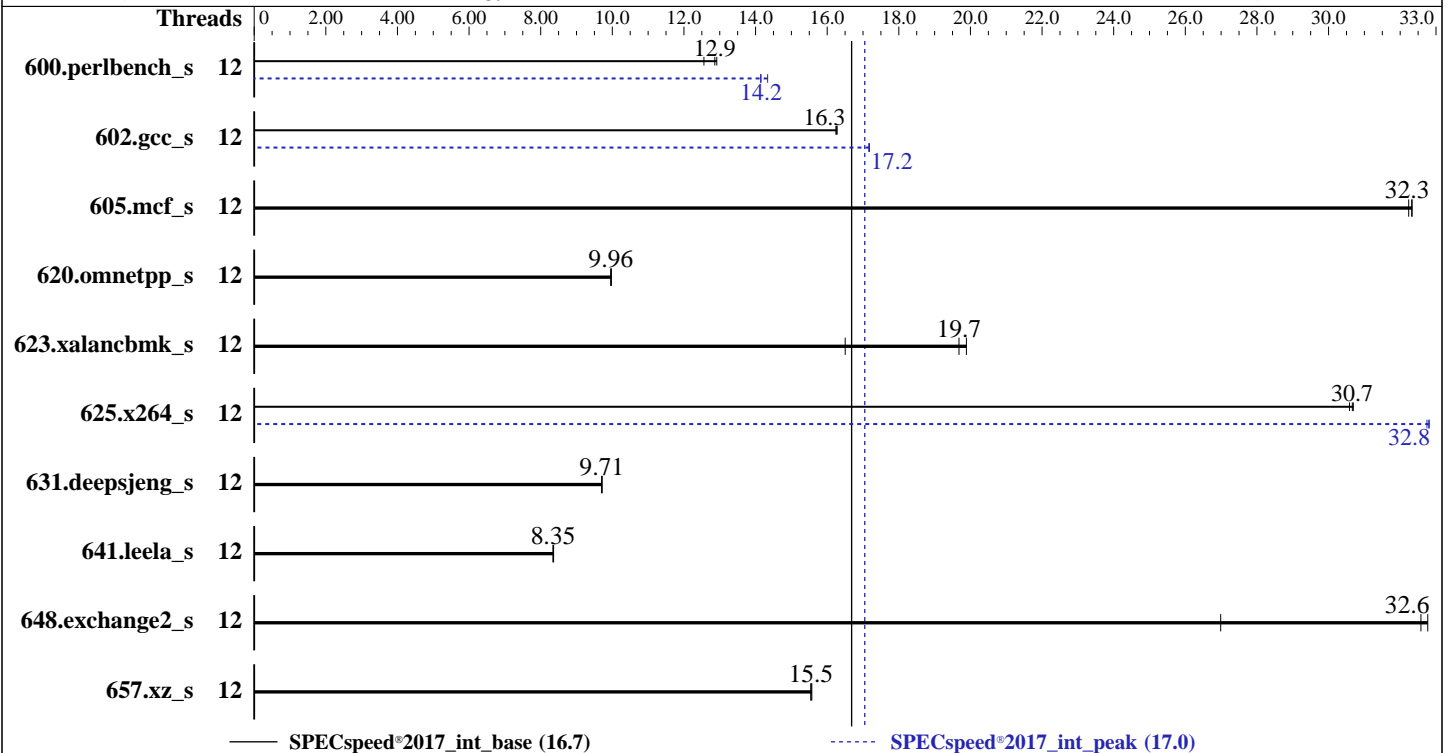

### Hardware

CPU Name: Intel Xeon E-2486  
 Max MHz: 5600  
 Nominal: 3500  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CTE101Z 1.10 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	137	12.9	<b><u>138</u></b>	<b><u>12.9</u></b>	141	12.6	12	124	14.3	<b><u>125</u></b>	<b><u>14.2</u></b>	126	14.1
602.gcc_s	12	245	16.3	<b><u>245</u></b>	<b><u>16.3</u></b>	245	16.2	12	232	17.2	232	17.2	<b><u>232</u></b>	<b><u>17.2</u></b>
605.mcf_s	12	<b><u>146</u></b>	<b><u>32.3</u></b>	146	32.3	146	32.2	12	<b><u>146</u></b>	<b><u>32.3</u></b>	146	32.3	146	32.2
620.omnetpp_s	12	164	9.96	164	9.97	<b><u>164</u></b>	<b><u>9.96</u></b>	12	164	9.96	164	9.97	<b><u>164</u></b>	<b><u>9.96</u></b>
623.xalancbmk_s	12	85.9	16.5	71.3	19.9	<b><u>72.0</u></b>	<b><u>19.7</u></b>	12	85.9	16.5	71.3	19.9	<b><u>72.0</u></b>	<b><u>19.7</u></b>
625.x264_s	12	<b><u>57.5</u></b>	<b><u>30.7</u></b>	57.7	30.6	57.5	30.7	12	53.9	32.7	<b><u>53.8</u></b>	<b><u>32.8</u></b>	53.8	32.8
631.deepsjeng_s	12	<b><u>148</u></b>	<b><u>9.71</u></b>	148	9.71	148	9.71	12	<b><u>148</u></b>	<b><u>9.71</u></b>	148	9.71	148	9.71
641.leela_s	12	204	8.36	204	8.35	<b><u>204</u></b>	<b><u>8.35</u></b>	12	204	8.36	204	8.35	<b><u>204</u></b>	<b><u>8.35</u></b>
648.exchange2_s	12	109	27.0	<b><u>90.2</u></b>	<b><u>32.6</u></b>	89.7	32.8	12	109	27.0	<b><u>90.2</u></b>	<b><u>32.6</u></b>	89.7	32.8
657.xz_s	12	398	15.5	397	15.6	<b><u>398</u></b>	<b><u>15.5</u></b>	12	398	15.5	397	15.6	<b><u>398</u></b>	<b><u>15.5</u></b>

SPECspeed®2017\_int\_base = **16.7**

SPECspeed®2017\_int\_peak = **17.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.7

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017

**Test Date:** Feb-2024

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2024

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2023

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode

CPU P-State Control set to Cooperative with Legacy

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sun Feb 18 09:27:38 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:27:38 up 2 min, 1 user, load average: 0.00, 0.00, 0.00
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root     tty1      -              09:25       6.00s      0.62s     0.00s     -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 256771
max locked memory       (kbytes, -l) 64
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 16.7

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_peak = 17.0

CPU2017 License: 9017

Test Date: Feb-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

### Platform Notes (Continued)

```

max memory size      (kbytes, -m) unlimited
open files           (-n) 1024
pipe size            (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority   (-r) 0
stack size           (kbytes, -s) unlimited
cpu time             (seconds, -t) unlimited
max user processes   (-u) 256771
virtual memory       (kbytes, -v) unlimited
file locks           (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=6 --tune base,peak -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
-runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=6 --tune base,peak --output_format all --define
  intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size
  refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.402/templogs/preenv.intspeed.402.0.log --lognum 402.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) E E-2486
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 6
siblings       : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 42 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 12
On-line CPU(s) list: 0-11
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) E E-2486
CPU family: 6
Model: 183

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

### Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:    6
Socket(s):              1
Stepping:               1
CPU max MHz:           7200.0000
CPU min MHz:           800.0000
BogoMIPS:              6988.80
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                        clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                        avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
                        hwp_pkg_req hfi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
                        movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr flush_lld
                        arch_capabilities

Virtualization:        VT-x
L1d cache:            288 KiB (6 instances)
L1i cache:            192 KiB (6 instances)
L2 cache:             12 MiB (6 instances)
L3 cache:             18 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):   0-11
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBSB-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 64222 MB
node 0 free: 63690 MB
node distances:
node 0
0: 10

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

9. /proc/meminfo  
MemTotal: 65764248 kB

10. who -r  
run-level 3 Feb 18 09:25

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=1a7e87cc-1541-4a67-83ce-e77f091f769b  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 6.90 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness               60
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda2   xfs   1.8T  30G  1.8T   2% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem ST250 V3
Product Family: ThinkSystem
Serial:      1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Samsung M324R4GA3BB0-CQKOL 32 GB 2 rank 4800, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     CTE101Z-1.10
BIOS Date:        12/27/2023

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

BIOS Revision: 1.10  
Firmware Revision: 1.10

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Portability Flags (Continued)

631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST250 V3  
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017\_int\_base = 16.7

SPECspeed®2017\_int\_peak = 17.0

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-17 20:27:37-0500.

Report generated on 2024-03-14 10:58:57 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.