



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11


(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

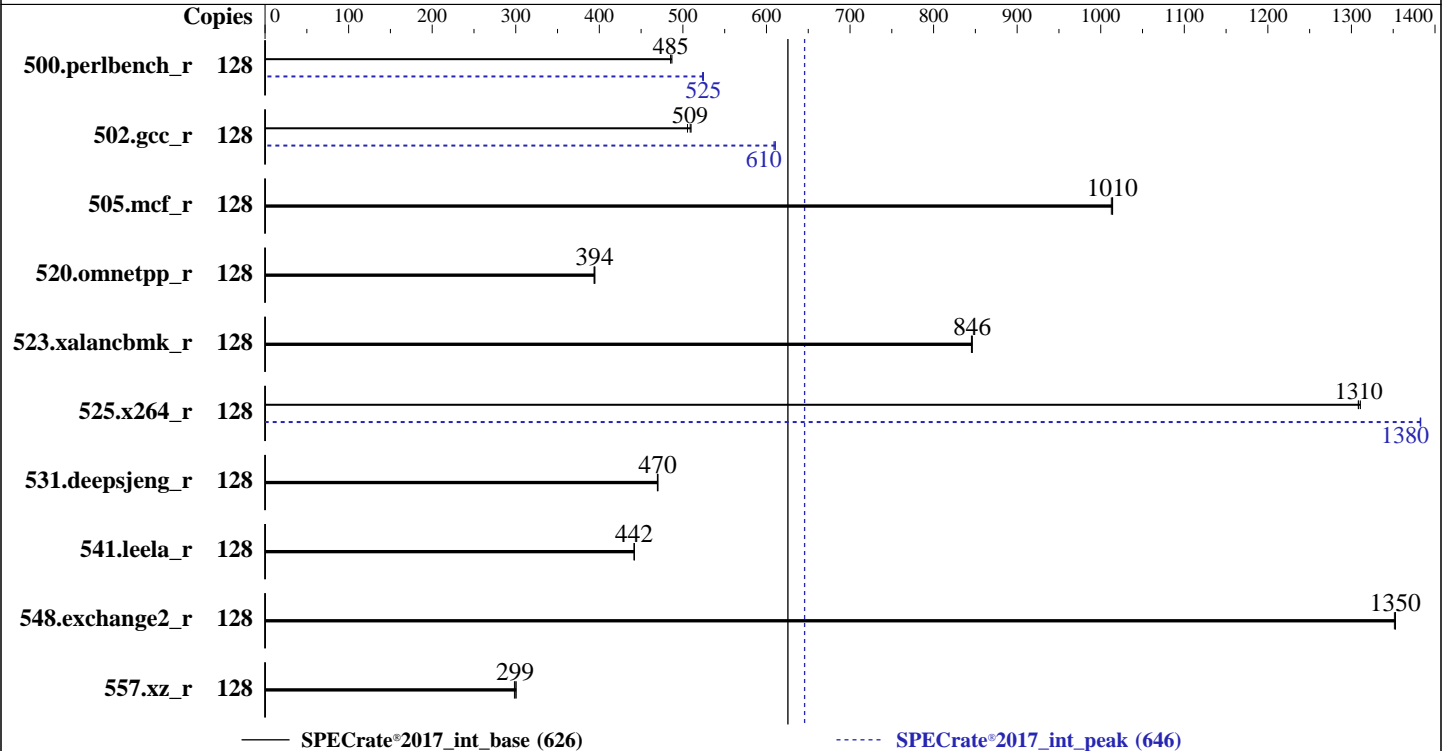

Hardware

CPU Name: Intel Xeon Gold 6538Y+
Max MHz: 4000
Nominal: 2200
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)
Storage: 1 x 3.2 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
Kernel 5.14.21-150500.53-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	420	485	418	487	420	485	128	388	525	388	525	389	523
502.gcc_r	128	356	510	359	505	356	509	128	297	610	297	611	298	609
505.mcf_r	128	204	1010	204	1010	204	1010	128	204	1010	204	1010	204	1010
520.omnetpp_r	128	426	394	426	395	427	394	128	426	394	426	395	427	394
523.xalancbmk_r	128	160	846	160	845	160	846	128	160	846	160	845	160	846
525.x264_r	128	171	1310	171	1310	171	1310	128	162	1380	162	1380	162	1380
531.deepsjeng_r	128	312	469	312	470	312	470	128	312	469	312	470	312	470
541.leela_r	128	480	442	480	442	480	442	128	480	442	480	442	480	442
548.exchange2_r	128	248	1350	248	1350	248	1350	128	248	1350	248	1350	248	1350
557.xz_r	128	460	301	462	299	463	298	128	460	301	462	299	463	298

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Intel UPI Link Enablement set to Single Link

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Mar 29 00:56:20 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```
2. w
   00:56:20 up 1 min,  0 users,  load average: 0.75, 0.32, 0.11
USER      TTY      FROM          LOGIN@  IDLE   JCPU   PCPU   WHAT
```

```
-----
3. Username
   From environment variable $USER:  root
```

```
-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size                (blocks, -f) unlimited
   pending signals         (-i) 4126992
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files               (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size               (kbytes, -s) unlimited
   cpu time                 (seconds, -t) unlimited
   max user processes      (-u) 4126992
   virtual memory           (kbytes, -v) unlimited
   file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root@notty
   bash -c cd $SPEC/ && $SPEC/intrateTP.sh
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
     ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
     --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 6538Y+
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 207
   stepping        : 2
   microcode       : 0x21000200
   bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores       : 32
   siblings        : 64
   2 physical ids (chips)
   128 processors (hardware threads)
   physical id 0:  core ids 0-31
   physical id 1:  core ids 0-31
   physical id 0:  apicids 0-63
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       128
On-line CPU(s) list:         0-127
Vendor ID:                    GenuineIntel
Model name:                   INTEL(R) XEON(R) GOLD 6538Y+
CPU family:                   6
Model:                        207
Thread(s) per core:          2
Core(s) per socket:          32
Socket(s):                    2
Stepping:                     2
BogoMIPS:                     4400.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                vmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                                avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   3 MiB (64 instances)
L1i cache:                   2 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    120 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-15,64-79
NUMA node1 CPU(s):           16-31,80-95
NUMA node2 CPU(s):           32-47,96-111
NUMA node3 CPU(s):           48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                                sequence

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257698 MB
node 0 free: 256591 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257301 MB
node 2 cpus: 32-47,96-111
node 2 size: 258039 MB
node 2 free: 257211 MB
node 3 cpus: 48-63,112-127
node 3 size: 258000 MB
node 3 free: 257253 MB
node distances:
node  0  1  2  3
0:  10  20  30  30
1:  20  10  30  30
2:  30  30  10  20
3:  30  30  20  10

```

9. /proc/meminfo

MemTotal: 1056541816 kB

10. who -r

run-level 3 Mar 29 00:55

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-haved-g-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

indirect
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned
udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=28e43194-6073-4de5-af23-e7fdc19dcb35
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 445G 21G 424G 5% /home

21. /sys/devices/virtual/dmi/id
Vendor: HPE
Product: ProLiant DL380 Gen11
Product Family: ProLiant
Serial: CNX21000G3

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Hynix HMC94AGBRA184N 64 GB 2 rank 5600, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: HPE
BIOS Version: 2.12
BIOS Date: 12/13/2023
BIOS Revision: 2.12
Firmware Revision: 1.52

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base, peak) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

```

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017_int_base = 626

SPECrate®2017_int_peak = 646

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-28 15:26:20-0400.

Report generated on 2024-07-30 19:33:36 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-30.