



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation


ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

CPU2017 License: 9061  
Test Sponsor: ZTE Corporation  
Tested by: ZTE Corporation

Test Date: Jul-2024  
Hardware Availability: Feb-2023  
Software Availability: Dec-2023

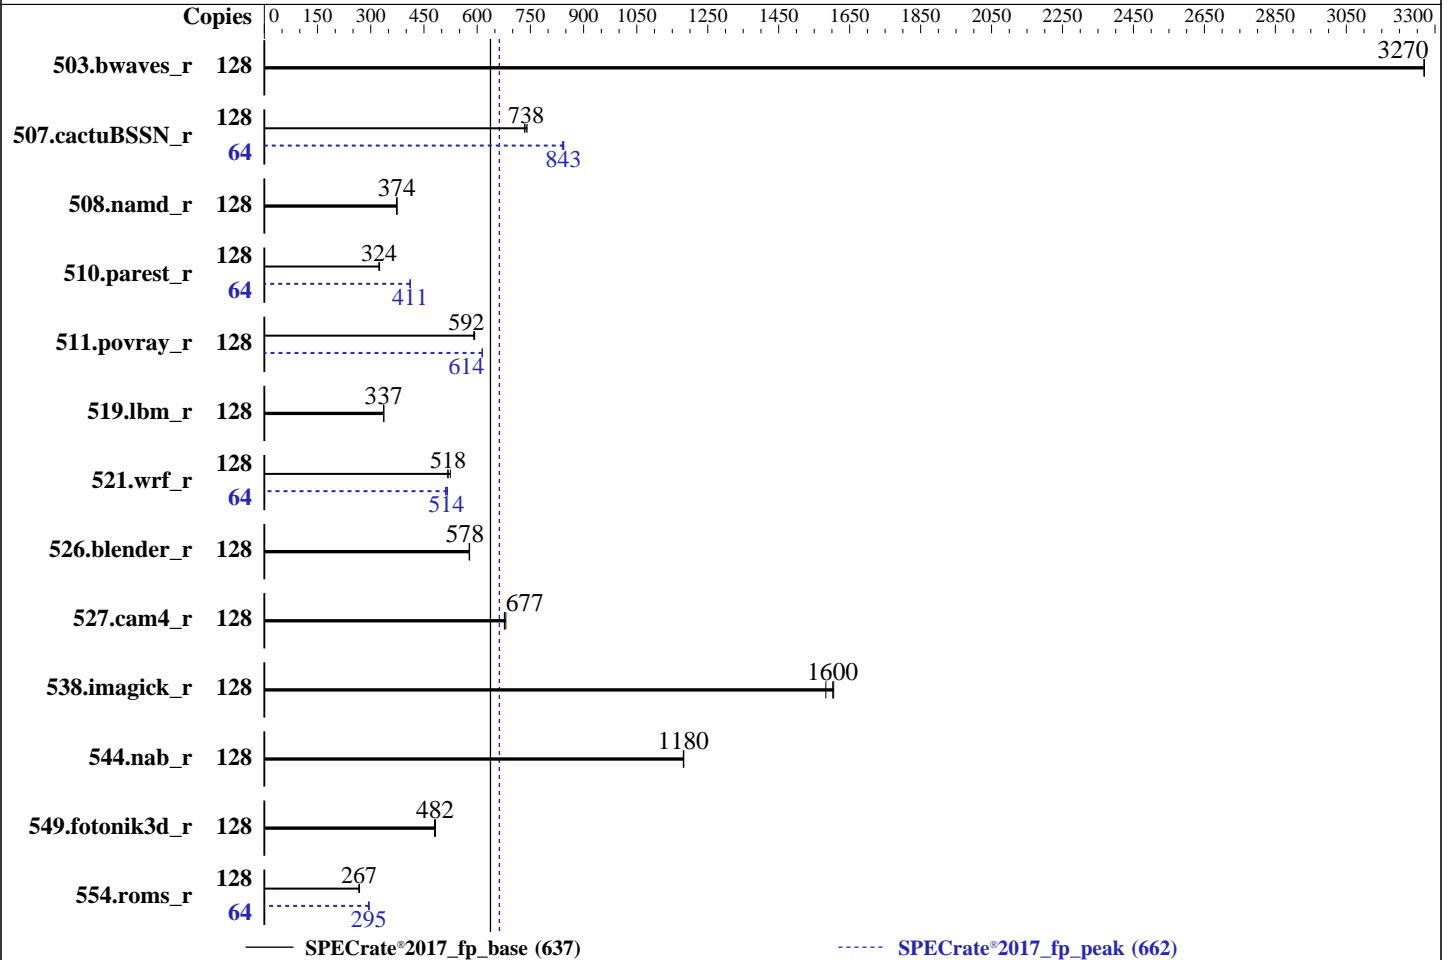

### Hardware

CPU Name: Intel Xeon Gold 6430  
 Max MHz: 3400  
 Nominal: 2100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 04.24.02.00 released May-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b>393</b>	<b>3270</b>	393	3270	393	3270	128	<b>393</b>	<b>3270</b>	393	3270	393	3270
507.cactuBSSN_r	128	219	741	221	734	<b>220</b>	<b>738</b>	64	96.0	844	96.4	840	<b>96.1</b>	<b>843</b>
508.namd_r	128	326	373	325	374	<b>325</b>	<b>374</b>	128	326	373	325	374	<b>325</b>	<b>374</b>
510.parest_r	128	1030	325	1036	323	<b>1035</b>	<b>324</b>	64	407	411	<b>407</b>	<b>411</b>	407	411
511.povray_r	128	504	593	<b>505</b>	<b>592</b>	506	590	128	486	615	<b>487</b>	<b>614</b>	487	614
519.lbm_r	128	401	336	<b>401</b>	<b>337</b>	401	337	128	401	336	<b>401</b>	<b>337</b>	401	337
521.wrf_r	128	555	517	<b>553</b>	<b>518</b>	547	524	64	278	516	<b>279</b>	<b>514</b>	281	510
526.blender_r	128	<b>337</b>	<b>578</b>	338	578	337	579	128	<b>337</b>	<b>578</b>	338	578	337	579
527.cam4_r	128	331	677	329	681	<b>331</b>	<b>677</b>	128	331	677	329	681	<b>331</b>	<b>677</b>
538.imagick_r	128	201	1580	198	1600	<b>199</b>	<b>1600</b>	128	201	1580	198	1600	<b>199</b>	<b>1600</b>
544.nab_r	128	182	1180	182	1180	<b>182</b>	<b>1180</b>	128	182	1180	182	1180	<b>182</b>	<b>1180</b>
549.fotonik3d_r	128	<b>1036</b>	<b>482</b>	1040	480	1035	482	128	<b>1036</b>	<b>482</b>	1040	480	1035	482
554.roms_r	128	758	268	762	267	<b>762</b>	<b>267</b>	64	344	296	347	293	<b>345</b>	<b>295</b>

SPECrate®2017\_fp\_base = **637**

SPECrate®2017\_fp\_peak = **662**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/spec/lib/intel64:/home/spec/je5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

ENERGY\_PERF\_BIAS\_CFG mode = performance  
LLC dead line alloc = Disabled  
Patrol Scrub = Disabled  
Sub NUMA(SNC) = Enable SNC4

Sysinfo program /home/spec/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue Jul 30 07:47:30 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.e19\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

2. w  
07:47:30 up 7:40, 1 user, load average: 82.38, 116.51, 123.19  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 00:56 6:47m 0.98s 0.01s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062378
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062378
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/spec
```

-----  
6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6430
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6430
BIOS Model name:      Intel(R) Xeon(R) Gold 6430
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              8
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lli arch_capabilities
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111
NUMA node6 CPU(s):    48-55,112-119
NUMA node7 CPU(s):    56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 64084 MB
node 0 free: 52811 MB
node 1 cpus: 8-15,72-79
node 1 size: 64508 MB
node 1 free: 57912 MB
node 2 cpus: 16-23,80-87
node 2 size: 64508 MB
node 2 free: 57895 MB
node 3 cpus: 24-31,88-95
node 3 size: 64508 MB
node 3 free: 57902 MB
node 4 cpus: 32-39,96-103
node 4 size: 64508 MB
node 4 free: 57737 MB
node 5 cpus: 40-47,104-111
node 5 size: 64508 MB
node 5 free: 57915 MB
node 6 cpus: 48-55,112-119
node 6 size: 64508 MB
node 6 free: 57903 MB
node 7 cpus: 56-63,120-127
node 7 size: 64497 MB
node 7 free: 57906 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 528008712 kB

10. who -r

run-level 3 Jul 30 00:07

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

11. Systemd service manager version: systemd 250 (250-6.e19\_0)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode  
nis-domainname rhsmcertd rpcbind rsyslog selinux-autorelabel-mark sshd sssd  
systemd-network-generator udisks2 virtgemud  
enabled-runtime systemd-remount-fs  
disabled blk-availability chronty-wait console-getty cpupower debug-shell dnsmasq gssproxy kvm\_stat  
libvirt-guests libvirtd man-db-restart-cache-update nfs-blkmap nfs-server nftables numad  
rdisc rhsm rhsm-facts rpmdb-rebuild saslauthd serial-getty@ sshd-keygen@  
systemd-boot-check-no-failures systemd-nsspawn@ systemd-pstore systemd-sysext virtnetworkkd  
virtproxyd virtsecret virtstoraged  
indirect pcsd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd  
virtlogd  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.e19\_0.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
processor\_speculative\_off=nospectre\_v1=off  
nohz\_full=0-239  
-----

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.40 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
-----

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

```
-----
19. Disk information
SPEC is set to: /home/spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G 187G 186G 51% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      ZTE
Product:     R5200 G5
Product Family: Server
Serial:      219431850385
```

```
-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R4GA3BB6-CQKMG 32 GB 2 rank 4800, configured at 4400
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     04.24.02.00
BIOS Date:        05/04/2024
BIOS Revision:    4.24
```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5200G5 Server System  
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017\_fp\_base = 637

SPECrate®2017\_fp\_peak = 662

**CPU2017 License:** 9061  
**Test Sponsor:** ZTE Corporation  
**Tested by:** ZTE Corporation

**Test Date:** Jul-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.12.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.12.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-30 07:47:30-0400.  
Report generated on 2024-09-11 09:32:42 by CPU2017 PDF formatter v6716.  
Originally published on 2024-09-10.