



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM

SPECmpiM\_peak2007 = Not Run

### iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 5.36

MPI2007 license: 3440


Test sponsor: Indiana university

Tested by: Scott Teige

Test date: Apr-2009

Hardware Availability: Sep-2008

Software Availability: Jan-2009

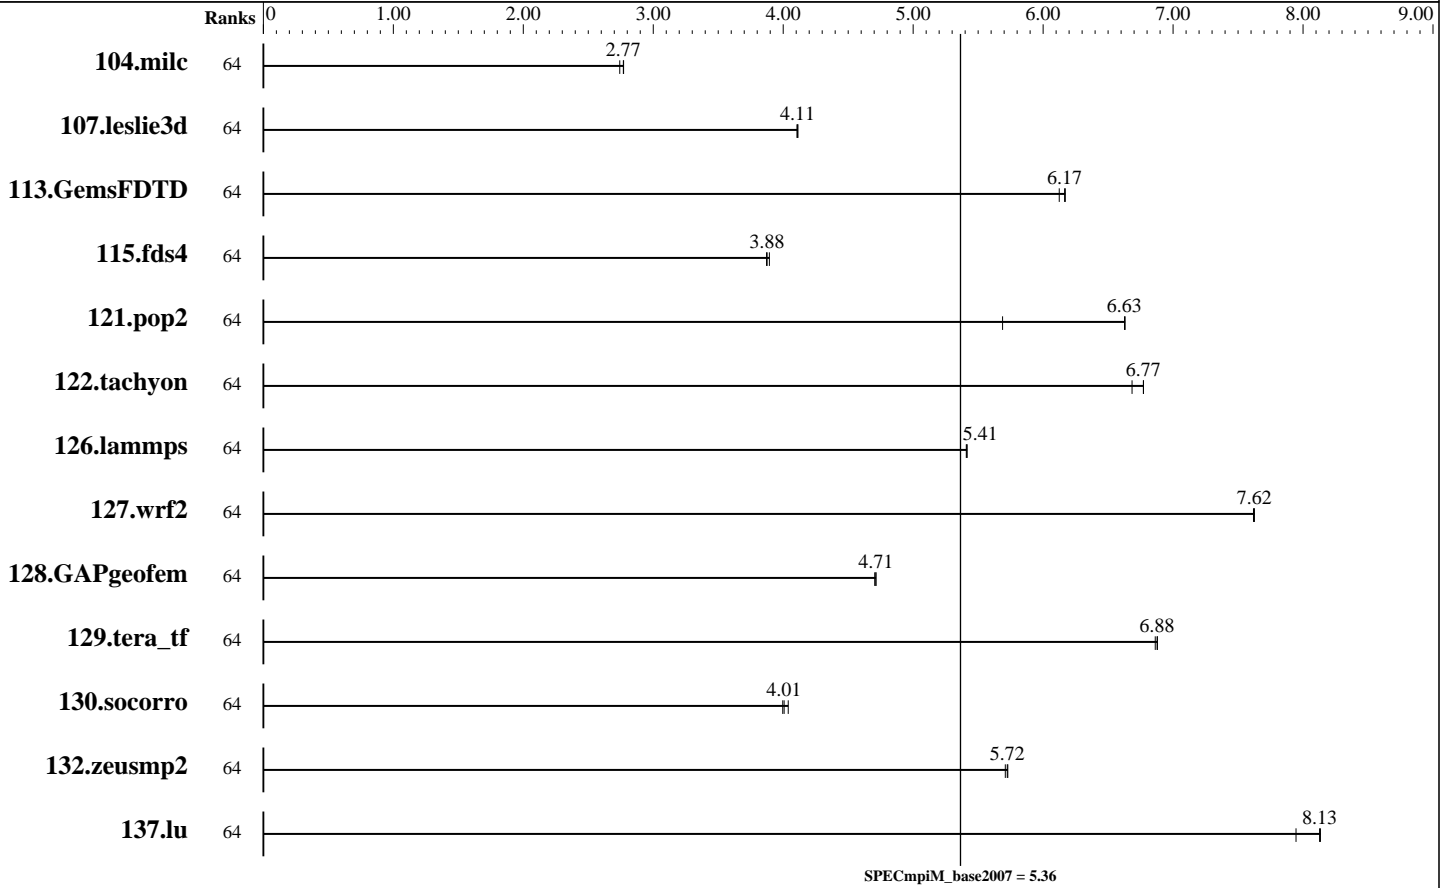

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	64	571	2.74	<b>565</b>	<b>2.77</b>	565	2.77									
107.leslie3d	64	<b>1270</b>	<b>4.11</b>	1269	4.11	1271	4.11									
113.GemsFDTD	64	1030	6.12	1022	6.17	<b>1023</b>	<b>6.17</b>									
115.fds4	64	<b>503</b>	<b>3.88</b>	504	3.87	501	3.89									
121.pop2	64	726	5.69	<b>623</b>	<b>6.63</b>	623	6.63									
122.tachyon	64	418	6.68	<b>413</b>	<b>6.77</b>	413	6.77									
126.lammps	64	538	5.41	<b>539</b>	<b>5.41</b>	539	5.41									
127.wrf2	64	1022	7.63	1023	7.62	<b>1023</b>	<b>7.62</b>									
128.GAPgeofem	64	439	4.70	<b>438</b>	<b>4.71</b>	438	4.71									
129.tera_tf	64	<b>402</b>	<b>6.88</b>	402	6.88	403	6.86									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM

SPECmpiM\_peak2007 = Not Run

### iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 5.36

MPI2007 license: 3440  
Test sponsor: Indiana university  
Tested by: Scott Teige

Test date: Apr-2009  
Hardware Availability: Sep-2008  
Software Availability: Jan-2009

## Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	64	945	4.04	955	4.00	<b>953</b>	<b>4.01</b>							
132.zeusmp2	64	<b>542</b>	<b>5.72</b>	544	5.71	542	5.73							
137.lu	64	<b>452</b>	<b>8.13</b>	463	7.95	452	8.13							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Hardware Summary

Type of System: Homogeneous  
Compute Node: iDP node  
Interconnects: Gigabit Ethernet  
IB Switch  
Total Compute Nodes: 8  
Total Chips: 16  
Total Cores: 64  
Total Threads: 64  
Total Memory: 256 GB  
Base Ranks Run: 64  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Compiler 10.1 for Linux (10.1.013)  
C++ Compiler: Intel C++ Compiler 10.1 for Linux (10.1.013)  
Fortran Compiler: Intel Fortran Compiler 10.1 for Linux (10.1.013)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
MPI Library: Intel MPI 3.1  
Other MPI Info: None  
Pre-processors: No  
Other Software: OFED 1.4 compat-dapl-1.2.13  
Intel MPI Library 3.1 for Linux Multi-Purpose Daemon (MPD)

## Node Description: iDP node

### Hardware

Number of nodes: 8  
Uses of the node: compute  
Vendor: IBM  
Model: System x iDataPlex dx340  
CPU Name: Intel Xeon L5420  
CPU(s) orderable: 1-2 chips  
Chips enabled: 2  
Cores enabled: 8  
Cores per chip: 4  
Threads per core: 1  
CPU Characteristics: 1333 MHz FSB  
CPU MHz: 2500  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 32 GB (FBDIMM 8x4-GB 667 MHz)  
Disk Subsystem: Western Digital 160 GB SATA WD160YS-23SHBO  
Other Hardware: None  
Adapter: Intel Corporation 80003ES2LAN Gigabit Ethernet Controller (Copper) (rev 01)  
Number of Adapters: 2  
Slot Type: --  
Data Rate: Gigabit Ethernet

### Software

Adapter: Intel Corporation 80003ES2LAN Gigabit Ethernet Controller (Copper) (rev 01)  
Adapter Driver: OS default (e1000, v7.3.20-k2-NAPI)  
Adapter Firmware: 2.4-0  
Adapter: Mellanox Technologies MT26418 [ConnectX IB DDR, PCIe 2.0 5GT/s] (rev a0)  
Adapter Driver: OFED 1.3.1  
Adapter Firmware: 2.5.0  
Operating System: Red Hat EL v4.7  
2.6.9-67.0.22.EL\_lustre.1.6.7custom  
Local File System: Linux/ext3  
Shared File System: IBM N5500 NAS via NFSv3  
System State: Multi-User  
Other Software: lustre 1.6.7 kernel patches

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

IBM

SPECmpiM\_peak2007 = Not Run

iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 5.36

MPI2007 license: 3440

Test sponsor: Indiana university

Tested by: Scott Teige

Test date: Apr-2009

Hardware Availability: Sep-2008

Software Availability: Jan-2009

## Node Description: iDP node

Ports Used:	1
Interconnect Type:	Ethernet
Adapter:	Mellanox Technologies MT26418 [ConnectX IB DDR, PCIe 2.0 5GT/s] (rev a0)
Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x DDR
Ports Used:	1
Interconnect Type:	InfiniBand

## Interconnect Description: Gigabit Ethernet

	Hardware	Software
Vendor:	ProCurve Networking	
Model:	HP ProCurve Switch 5406zl Intelligent Edge J8697A	
Switch Model:	HP ProCurve Switch 5406zl Intelligent Edge J8697A	
Number of Switches:	1	
Number of Ports:	144	
Data Rate:	1Gbps Ethernet	
Firmware:	--	
Topology:	Single switch	
Primary Use:	I/O traffic	

## Interconnect Description: IB Switch

	Hardware	Software
Vendor:	Cisco	
Model:	Cisco SFS 7024D	
Switch Model:	Cisco SFS 7024D	
Number of Switches:	1	
Number of Ports:	288	
Data Rate:	InfiniBand 4x DDR	
Firmware:	4.1.1.1.11	
Topology:	Single switch	
Primary Use:	MPI traffic	

## Submit Notes

The config file option 'submit' was used.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**IBM**

SPECmpiM\_peak2007 = Not Run

**iDP (Intel Xeon L5420, 2.50 GHz)**

SPECmpiM\_base2007 = 5.36

**MPI2007 license:** 3440

**Test sponsor:** Indiana university

**Tested by:** Scott Teige

**Test date:** Apr-2009

**Hardware Availability:** Sep-2008

**Software Availability:** Jan-2009

## Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Benchmarks using both Fortran and C:  
mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK  
127.wrf2: -DSPEC\_MPI\_LINUX -DSPEC\_MPI\_CASE\_FLAG

## Base Optimization Flags

C benchmarks:  
-O3 -xT -ipo -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xT -ipo -no-prec-div

Fortran benchmarks:  
-O3 -xT -ipo -no-prec-div

Benchmarks using both Fortran and C:  
-O3 -xT -ipo -no-prec-div

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.html](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

IBM

SPECmpiM\_peak2007 = Not Run

iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 5.36

MPI2007 license: 3440  
Test sponsor: Indiana university  
Tested by: Scott Teige

Test date: Apr-2009  
Hardware Availability: Sep-2008  
Software Availability: Jan-2009

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v1.1.  
Report generated on Tue Jul 22 13:35:59 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 6 May 2009.