



SPEC® OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Colfax International

(Test Sponsor: Indiana University)

Intel Xeon Phi 7210, 1.30GHz,
SMT off, Turbo off, flat DRAM+MCDRAM

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 4.29

OMP2012 license:3440A


Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2016

Hardware Availability: Aug-2016

Software Availability: Apr-2016

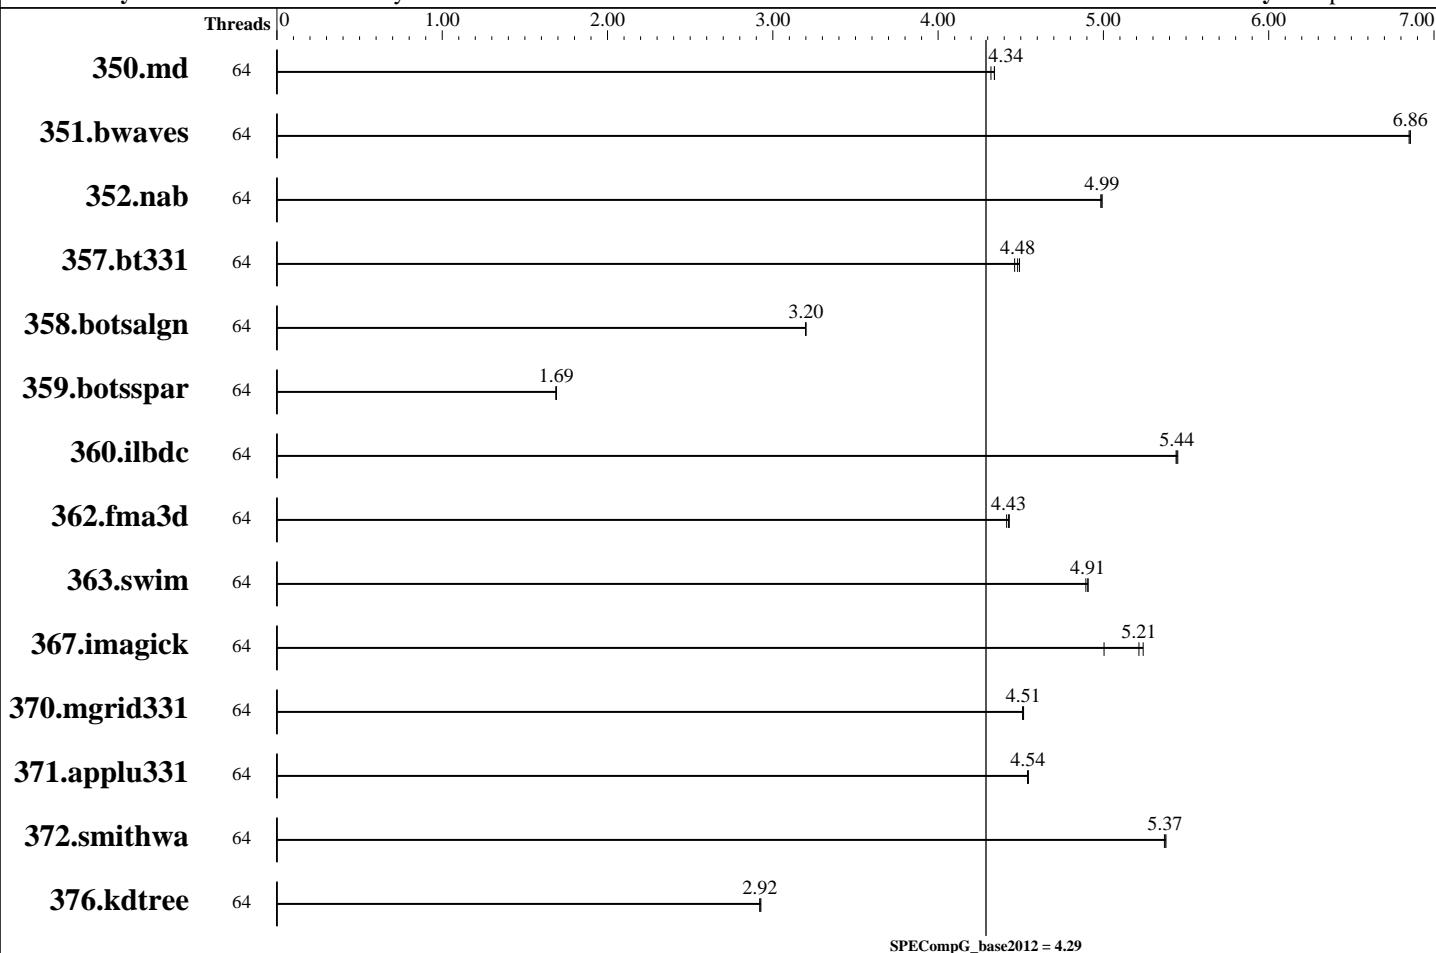

Hardware

CPU Name: Intel Xeon Phi 7210
 CPU Characteristics: Intel Turbo Boost Technology off, Simultaneous Multithreading (SMT) off
 CPU MHz: 1300
 CPU MHz Maximum: 1500
 FPU: Integrated
 CPU(s) enabled: 64 cores, 1 chip, 64 cores/chip, 4 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per two cores
 L3 Cache: None
 Other Cache: None
 Memory: 96 GB (6 x 16 GB 2Rx8 PC4-2400T-REB-11, ECC)
 Disk Subsystem: Intel S3510 SSD 800GB, SATA3
 Other Hardware: None
 Base Threads Run: 64

Software

Operating System: CentOS Linux release 7.2.1511
 CentOS Linux release 7.2.1511 (Core)
 Compiler: 3.10.0-327.13.1.el7.xppsl_1.3.3.151.x86_64
 C/C++/Fortran: Version 16.0.3.210 of Intel Composer XE 2016 for Linux Build 20160415
 Auto Parallel: No
 File System: ext4
 System State: Runlevel 3 (multi-user with networking)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Colfax International

(Test Sponsor: Indiana University)

Intel Xeon Phi 7210, 1.30GHz,
SMT off, Turbo off, flat DRAM+MCDRAM

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 4.29

OMP2012 license:3440A

Test date: Aug-2016

Test sponsor: Indiana University

Hardware Availability: Aug-2016

Tested by: Indiana University

Software Availability: Apr-2016

Minimum Peak Threads: --
Maximum Peak Threads: --

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	64	1072	4.32	1067	4.34	1067	4.34									
351.bwaves	64	661	6.86	661	6.86	661	6.85									
352.nab	64	779	4.99	781	4.98	779	4.99									
357.bt331	64	1062	4.46	1058	4.48	1055	4.49									
358.botsalgn	64	1359	3.20	1360	3.20	1359	3.20									
359.botsspar	64	3105	1.69	3110	1.69	3107	1.69									
360.ilbdc	64	654	5.44	654	5.44	653	5.45									
362.fma3d	64	858	4.43	861	4.41	859	4.43									
363.swim	64	923	4.91	923	4.91	926	4.89									
367.imagick	64	1405	5.00	1348	5.21	1341	5.24									
370.mgrid331	64	979	4.52	980	4.51	979	4.51									
371.applu331	64	1334	4.54	1333	4.55	1334	4.54									
372.smithwa	64	998	5.37	997	5.38	998	5.37									
376.kdtree	64	1540	2.92	1541	2.92	1537	2.93									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /home/ljunj/SPEC/omp2012-1.1-run/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on kn11.uits.indiana.edu Fri Oct 14 02:47:30 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon Phi(TM) CPU 7210 @ 1.30GHz
  1 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 64
  siblings : 64
  physical 0: cores 0 1 2 3 6 7 10 11 12 13 14 15 18 19 20 21 22 23 24 25 26
  27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
  52 53 56 57 58 59 60 61 62 63 64 65 68 69 70 71 72 73
cache size : 1024 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Colfax International

(Test Sponsor: Indiana University)

Intel Xeon Phi 7210, 1.30GHz,
SMT off, Turbo off, flat DRAM+MCDRAM

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 4.29

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2016

Hardware Availability: Aug-2016

Software Availability: Apr-2016

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      115216920 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb_release -d

```
CentOS Linux release 7.2.1511 (Core)
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.2.1511 (Core)
```

```
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.2 (Source)
```

```
os-release:
```

```
  NAME="CentOS Linux"
```

```
  VERSION="7 (Core)"
```

```
  ID="centos"
```

```
  ID_LIKE="rhel fedora"
```

```
  VERSION_ID="7"
```

```
  PRETTY_NAME="CentOS Linux 7 (Core)"
```

```
  ANSI_COLOR="0;31"
```

```
  CPE_NAME="cpe:/o:centos:centos:7"
```

```
redhat-release: CentOS Linux release 7.2.1511 (Core)
```

```
system-release: CentOS Linux release 7.2.1511 (Core)
```

```
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux knl1.uits.indiana.edu 3.10.0-327.13.1.el7.xppsl_1.3.3.151.x86_64 #1 SMP
Fri Jun 10 15:04:35 UTC 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 13 14:15

SPEC is set to: /home/liljunj/SPEC/omp2012-1.1-run

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	713G	78G	599G	12%	/

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

General Notes

BIOS settings:

Intel Simultaneous Multithreading (SMT): off

Intel Turbo Boost Technology (Turbo): off

Cluster Mode: quadrant

Memory Mode: flat



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Colfax International

(Test Sponsor: Indiana University)

Intel Xeon Phi 7210, 1.30GHz,
SMT off, Turbo off, flat DRAM+MCDRAM

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 4.29

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2016

Hardware Availability: Aug-2016

Software Availability: Apr-2016

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

350.md: -free
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:

-O3 -ansi-alias -no-prec-div -qopenmp -ipo -xMIC-AVX512
-fp-model fast=2

C++ benchmarks:

-O3 -ansi-alias -no-prec-div -qopenmp -ipo -xMIC-AVX512
-fp-model fast=2

Fortran benchmarks:

-O3 -no-prec-div -qopenmp -ipo -xMIC-AVX512 -fp-model fast=2

The flags files that were used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic16.0-linux64.html>

<http://www.spec.org/omp2012/flags/colfax-knl.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/omp2012/flags/Intel-ic16.0-linux64.xml>

<http://www.spec.org/omp2012/flags/colfax-knl.xml>



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Colfax International

(Test Sponsor: Indiana University)

Intel Xeon Phi 7210, 1.30GHz,
SMT off, Turbo off, flat DRAM+MCDRAM

SPECompG_peak2012 = Not Run

SPECompG_base2012 = 4.29

OMP2012 license:3440A

Test date: Aug-2016

Test sponsor: Indiana University

Hardware Availability: Aug-2016

Tested by: Indiana University

Software Availability: Apr-2016

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.

Report generated on Wed Jan 11 12:09:29 2017 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 11 January 2017.