



SPEC® OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

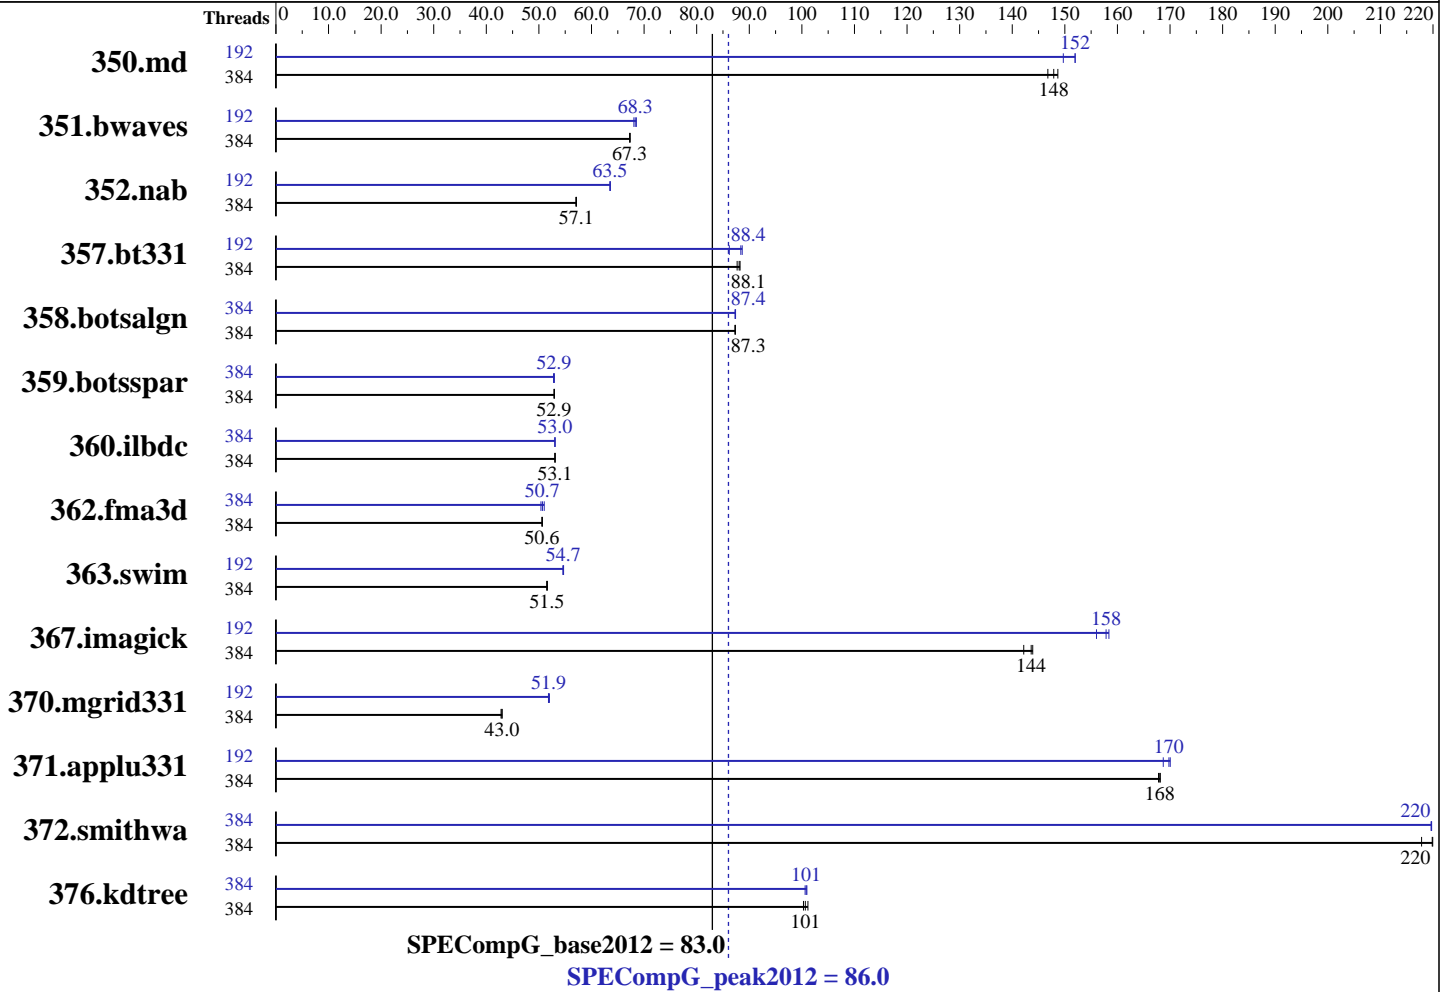

Hardware

CPU Name: AMD EPYC 9654
 CPU Characteristics: Max Boost Clock up to 3.7 GHz
 CPU MHz: 2400
 CPU MHz Maximum: 3700
 FPU: Integrated
 CPU(s) enabled: 192 cores, 2 chips, 96 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other Cache: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Disk Subsystem: 1 x 1 TB SATA Hard Drive
 Other Hardware: None
 Base Threads Run: 384

Continued on next page

Software

Operating System: Red Hat Enterprise Linux (x86_64), Kernel 4.18.0-240.el8.x86_64
 Compiler: C/C++/Fortran: Version 2022.2.0.191 of Intel oneAPI DPC++/C++
 Auto Parallel: No
 File System: xfs
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Minimum Peak Threads: 192
Maximum Peak Threads: 384

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	384	31.1	149	<u>31.3</u>	<u>148</u>	31.5	147	192	30.9	150	30.5	152	<u>30.5</u>	<u>152</u>
351.bwaves	384	67.3	67.3	<u>67.3</u>	<u>67.3</u>	67.3	67.3	192	<u>66.3</u>	<u>68.3</u>	66.1	68.5	66.6	68.1
352.nab	384	68.2	57.0	68.1	57.1	<u>68.1</u>	<u>57.1</u>	192	<u>61.2</u>	<u>63.5</u>	61.3	63.5	61.2	63.6
357.bt331	384	54.1	87.7	<u>53.8</u>	<u>88.1</u>	53.7	88.3	192	<u>53.6</u>	<u>88.4</u>	53.5	88.7	55.0	86.2
358.botsalgn	384	49.8	87.3	<u>49.8</u>	<u>87.3</u>	49.8	87.3	384	<u>49.8</u>	<u>87.4</u>	49.8	87.3	49.8	87.4
359.botsspar	384	99.2	52.9	99.2	52.9	<u>99.2</u>	<u>52.9</u>	384	99.5	52.8	<u>99.3</u>	<u>52.9</u>	99.2	52.9
360.ilbdc	384	<u>67.1</u>	<u>53.1</u>	67.1	53.0	67.1	53.1	384	<u>67.1</u>	<u>53.0</u>	67.1	53.0	67.1	53.1
362.fma3d	384	<u>75.1</u>	<u>50.6</u>	75.0	50.7	75.1	50.6	384	<u>75.0</u>	<u>50.7</u>	74.5	51.0	75.4	50.4
363.swim	384	87.9	51.5	<u>87.9</u>	<u>51.5</u>	87.8	51.6	192	<u>82.9</u>	<u>54.7</u>	83.0	54.6	82.8	54.7
367.imagick	384	48.9	144	<u>49.0</u>	<u>144</u>	49.4	142	192	45.1	156	44.4	158	<u>44.5</u>	<u>158</u>
370.mgrid331	384	103	42.8	<u>103</u>	<u>43.0</u>	103	43.0	192	85.3	51.8	85.0	52.0	<u>85.2</u>	<u>51.9</u>
371.applu331	384	36.0	168	36.1	168	<u>36.1</u>	<u>168</u>	192	35.6	170	<u>35.7</u>	<u>170</u>	35.9	169
372.smithwa	384	<u>24.4</u>	<u>220</u>	24.4	220	24.6	218	384	24.4	220	24.4	220	<u>24.4</u>	<u>220</u>
376.kdtree	384	<u>44.7</u>	<u>101</u>	44.9	100	44.5	101	384	44.6	101	44.7	101	<u>44.6</u>	<u>101</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Sysinfo program /home/omp2012/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on Genoa-OMP2012 Wed Oct 19 11:17:02 2022

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
2 "physical id"s (chips)
384 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 96
siblings : 192
physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22
23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72
73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
physical 1: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test date: Oct-2022

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

```

23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72
73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
cache size : 1024 KB

```

From /proc/meminfo

```

MemTotal:          1584307428 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.6 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.6"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

```

uname -a:

```

Linux Genoa-OMP2012 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT
2022 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 19 04:23

SPEC is set to: /home/omp2012

```

Filesystem          Type      Size      Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs       819G      70G  749G   9% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo KAE103A-1.10 09/26/2022

Memory:

```

4x SK Hynix HMC94AEBQA109N 64 GB 2 rank 4800 MT/s
10x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800 MT/s
2x SK Hynix HMC94AEBRA109N 64 GB 2 rank 4800 MT/s
8x SK Hynix HMC94AEBRA123N 64 GB 2 rank 4800 MT/s

```

(End of data from sysinfo program)



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

General Notes

```

=====
General OMP Library Settings
ENV_OMP_PROC_BIND      = close
ENV_OMP_PLACES         = threads
ENV_OMP_WAIT_POLICY    = PASSIVE
ENV_OMP_MAX_ACTIVE_LEVELS = 1
ENV_OMP_THREADS        = 384
ENV_OMP_STACKSIZE      = 256M
ENV_OMP_SCHEDULE       = static
ENV_OMP_DYNAMIC        = FALSE

```

BIOS Setting notes:

Choose Operating Mode set to Maximum Performance and configured below settings:

- CPPC set as Disable
- ACPI SRAT L3 Cache as NUMA Domain set as Enabled
- DRAM Scrub Time set as Disabled

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Spectre variant 2) is mitigated in the system as tested and documented.

```

=====
OS tuning:
ulimit -s unlimited

```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```

350.md: -FR
357.bt331: -mcmodel=medium

```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test date: Oct-2022

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Base Portability Flags (Continued)

363.swim: -mcmmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:

-Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-ffast-math -fstrict-enums -fstrict-vtable-pointers
-fvirtual-function-elimination

C++ benchmarks:

-Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-ffast-math -fstrict-enums -fstrict-vtable-pointers

Fortran benchmarks:

-Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-align array128byte -ffinite-math-only -fno-omit-frame-pointer -m64
-ipol

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

350.md: -FR
357.bt331: -mcmmodel=medium
363.swim: -mcmmodel=medium
367.imagick: -std=c99



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Peak Optimization Flags

C benchmarks:

352.nab: -Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-ffast-math -fstrict-enums -fstrict-vtable-pointers
-fvirtual-function-elimination -fno-signed-zeros

358.botsalgn: -Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-ffast-math -fstrict-enums -fstrict-vtable-pointers
-fvirtual-function-elimination

359.botsspar: Same as 358.botsalgn

367.imagick: Same as 358.botsalgn

372.smithwa: Same as 358.botsalgn

C++ benchmarks:

-Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-ffast-math -fstrict-enums -fstrict-vtable-pointers

Fortran benchmarks:

350.md: -Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-align array128byte -ffinite-math-only
-fno-omit-frame-pointer -m64 -ipol

351.bwaves: Same as 350.md

357.bt331: -Ofast -fopenmp -march=core-avx2 -ipo -fma -ansi-alias
-fp-model fast=2 -qno-opt-multiple-gather-scatter-by-shuffles
-align array128byte -ffinite-math-only
-fno-omit-frame-pointer -m64 -ipol -norecursive

360.ilbdc: Same as 350.md

362.fma3d: Same as 350.md

363.swim: Same as 350.md

370.mgrid331: Same as 350.md

371.applu331: Same as 350.md



SPEC OMPG2012 Result

Copyright 2012-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECompG_peak2012 = 86.0

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECompG_base2012 = 83.0

OMP2012 license:28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/lenovo-omp2012-oneAPI.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/lenovo-omp2012-oneAPI.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.
Report generated on Thu Nov 10 10:18:07 2022 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 10 November 2022.