



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation


Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230

SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

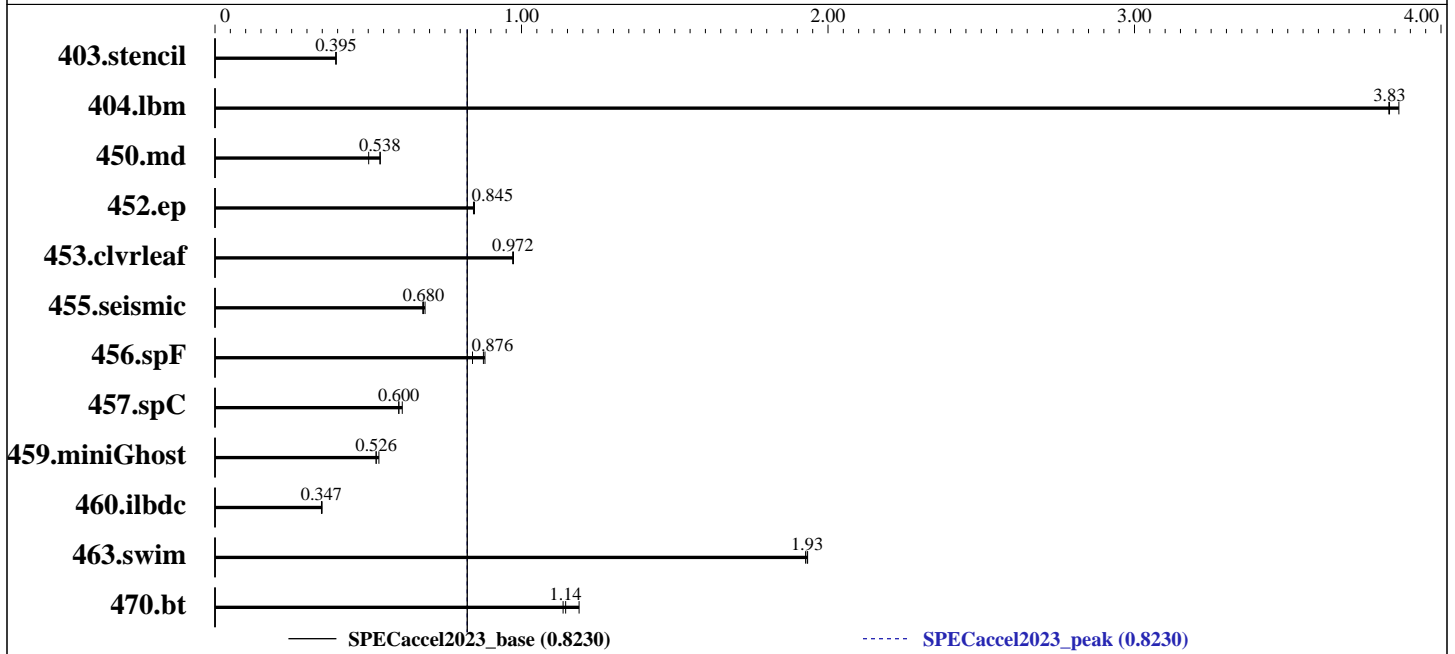

Hardware

CPU Name: INTEL Xeon Platinum 8592+
 Max MHz.: 3900
 Nominal: 1900
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 240 GB SATA III SSD
 Other: None
 Base Threads Run: 128
 Min. Peak Threads: 128
 Max. Peak Threads: 128

Accelerator

Accel Model Name: Intel Xeon Platinum 8592+
 Accel Vendor: Intel
 Accel Name: Intel Xeon Platinum 8592+
 Type of Accel: CPU
 Accel Connection: N/A
 Does Accel Use ECC: Yes
 Accel Description: 1 x Intel Xeon Platinum 8592+
 Accel Driver: N/A

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++/Fortran: Version 2024.0.0.20231017 of Intel oneAPI DPC++/C++
 Firmware: Version 2.1 released Dec-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Other: None
 Base Parallel Model: LOP
 Base Threads Run: 128

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230

SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Software (Continued)

Peak Parallel Models: LOP
Max. Peak Threads: 128
Min. Peak Threads: 128

Results Table

Benchmark	Base								Peak							
	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
403.stencil	LOP	1114	0.395	1114	0.395	1117	0.394	LOP	1114	0.395	1114	0.395	1117	0.394		
404.lbm	LOP	119	3.83	119	3.83	118	3.86	LOP	119	3.83	119	3.83	118	3.86		
450.md	LOP	1112	0.540	1116	0.538	1197	0.501	LOP	1112	0.540	1116	0.538	1197	0.501		
452.ep	LOP	490	0.847	492	0.843	491	0.845	LOP	490	0.847	492	0.843	491	0.845		
453.clvrlleaf	LOP	1029	0.972	1027	0.974	1029	0.972	LOP	1029	0.972	1027	0.974	1029	0.972		
455.seismic	LOP	1138	0.685	1147	0.680	1151	0.678	LOP	1138	0.685	1147	0.680	1151	0.678		
456.spF	LOP	539	0.881	565	0.840	542	0.876	LOP	539	0.881	565	0.840	542	0.876		
457.spC	LOP	884	0.611	901	0.600	900	0.600	LOP	884	0.611	901	0.600	900	0.600		
459.miniGhost	LOP	1122	0.526	1122	0.526	1103	0.535	LOP	1122	0.526	1122	0.526	1103	0.535		
460.ilbdc	LOP	1597	0.347	1588	0.349	1598	0.347	LOP	1597	0.347	1588	0.349	1598	0.347		
463.swim	LOP	228	1.93	228	1.93	228	1.93	LOP	228	1.93	228	1.93	228	1.93		
470.bt	LOP	929	1.14	922	1.14	888	1.19	LOP	929	1.14	922	1.14	888	1.19		

SPEC accel2023_base = 0.8230

SPEC accel2023_peak = 0.8230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runaccel before the start of the run:

```
FORT_BUFFERED = "true"
KMP_AFFINITY = "compact,0"
KMP_BLOCKTIME = "infinite"
KMP_HW_SUBSET = "1S,64C,2T"
KMP_LIBRARY = "turnaround"
OMP_DYNAMIC = "FALSE"
OMP_NUM_THREADS = "64"
OMP_WAIT_POLICY = "active"
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, the CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230

SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Platform Notes

sysinfo program /home/accel2023/bin/sysinfo
Rev: r6622 of 2021-04-07 bla7d5f8f71be5aff70a755cad7211a0
running on 135-175-25 Fri Feb 9 10:18:36 2024

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8592+
1 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) PLATINUM 8592+
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 1
Stepping: 2
Frequency boost: enabled
CPU max MHz: 1901.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230

SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Platform Notes (Continued)

ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 320 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-31,64-95
NUMA node1 CPU(s): 32-63,96-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	320M	320M	20	Unified	3	262144	1	64

/proc/cpuinfo cache data
cache size : 327680 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95

(Continued on next page)



SPEC[®]Caccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPEC[®]Caccel2023_base = 0.8230

SPEC[®]Caccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Platform Notes (Continued)

```

node 0 size: 257638 MB
node 0 free: 255603 MB
node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127
node 1 size: 257993 MB
node 1 free: 257320 MB
node distances:
node  0  1
  0:  10 12
  1:  12 10

From /proc/meminfo
MemTotal:          528006388 kB
HugePages_Total:    0
Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP5"
VERSION_ID="15.5"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP5"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp5"

uname -a:
Linux 135-175-25 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26
UTC 2023 (b630043) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
mmio_stale_data:                         Not affected
retbleed:                                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swaps

```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230
SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Platform Notes (Continued)

```

barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling,
PBRSE-eIBRS: SW sequence
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Feb 8 16:39

SPEC is set to: /home/accel2023
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   221G  38G  184G  18% /

From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         SYS-521C-NR
Product Family: Family
Serial:         1234567890

Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
  8x Micron Technology MTC40F2046S1RC56BD1 64 GB 2 rank 5600

BIOS:
  BIOS Vendor:    American Megatrends International, LLC.
  BIOS Version:   2.1
  BIOS Date:      12/06/2023
  BIOS Revision:  5.32

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
C          | 403.stencil(base, peak) 404.lbm(base, peak) 452.ep(base, peak)
          | 457.spC(base, peak) 470.bt(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.0 (2024.0.0.20231017)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/intel/oneapi/compiler/2024.0/bin/compiler
Configuration file: /opt/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg

```

(Continued on next page)



SPEC[®]Caccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPEC[®]Caccel 2023_base = 0.8230
SPEC[®]Caccel 2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Compiler Version Notes (Continued)

=====
Fortran | 450.md(base, peak) 455.seismic(base, peak) 456.spF(base, peak)
| 460.ilbdc(base, peak) 463.swim(base, peak)
=====

ifx (IFX) 2024.0.0 20231017
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 453.clvrleaf(base, peak) 459.miniGhost(base, peak)
=====

ifx (IFX) 2024.0.0 20231017
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler 2024.0.0 (2024.0.0.20231017)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/intel/oneapi/compiler/2024.0/bin/compiler
Configuration file: /opt/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg
=====

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Base Portability Flags

450.md: -80
457.spC: -Wl,--no-relax(icx)(*) -mcmmodel=medium -shared-intel
-Wl,--no-relax(icx)
459.miniGhost: -nofor-main

(*) Indicates a portability flag that was found in a non-portability variable.



SPEC[®]Caccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPEC[®]Caccel 2023_base = 0.8230

SPEC[®]Caccel 2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Base Optimization Flags

C benchmarks:

```
-Ofast -O3 -xsapphirerapids -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always
-Xclang -fopenmp-declare-target-scalar-defaultmap-firstprivate
-fimf-precision=low
```

Fortran benchmarks:

```
-Ofast -O3 -xsapphirerapids -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always
-nostandard-realloc-lhs -align array32byte -auto
-fimf-accuracy-bits-sqrt=14 -fimf-precision=low
```

Benchmarks using both Fortran and C:

```
-Ofast -O3 -xsapphirerapids -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always
-Xclang -fopenmp-declare-target-scalar-defaultmap-firstprivate
-fimf-precision=low -nostandard-realloc-lhs -align array32byte -auto
-fimf-accuracy-bits-sqrt=14
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Peak Portability Flags

```
450.md: -80
457.spC: -Wl,--no-relax(icx)(*) -mmodel=medium -shared-intel
-Wl,--no-relax(icx)
459.miniGhost: -nofor-main
```

(*) Indicates a portability flag that was found in a non-portability variable.



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Supermicro
Intel Xeon Platinum 8592+
UP SuperServer SYS-521C-NR

SPECaccel2023_base = 0.8230

SPECaccel2023_peak = 0.8230

accel2023 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2024
Hardware Availability: Dec-2023
Software Availability: Nov-2023

Peak Optimization Flags

C benchmarks:

403.stencil: basepeak = yes

404.lbm: basepeak = yes

452.ep: basepeak = yes

457.spC: basepeak = yes

470.bt: basepeak = yes

Fortran benchmarks:

450.md: basepeak = yes

455.seismic: basepeak = yes

456.spF: basepeak = yes

460.ilbdc: basepeak = yes

463.swim: basepeak = yes

Benchmarks using both Fortran and C:

453.clvleaf: basepeak = yes

459.miniGhost: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/accel2023/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.html>
http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-03-06.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/accel2023/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.xml>
http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-03-06.xml

SPECaccel is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPECaccel2023 v2.0.17 on 2024-02-08 21:18:36-0500.
Report generated on 2024-03-06 18:09:10 by accel2023 PDF formatter v112.
Originally published on 2024-03-06.