



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 31.9

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 31.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

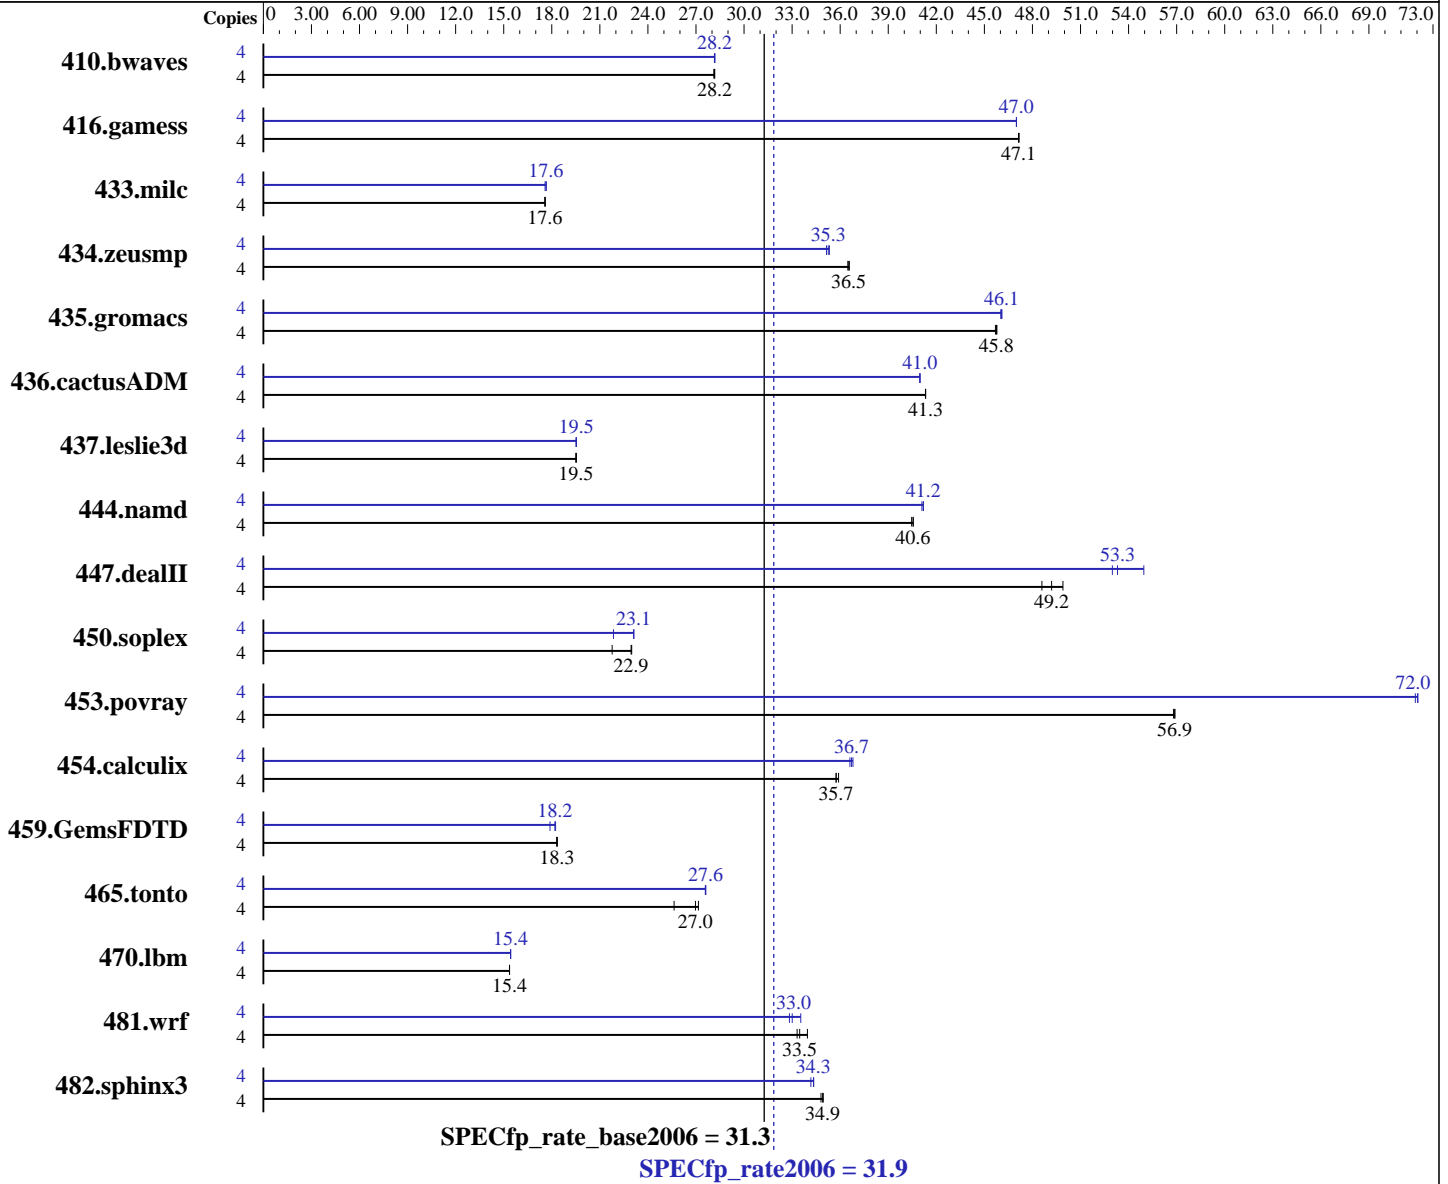

Hardware

CPU Name: Intel Xeon 5130
 CPU Characteristics: 2.0 GHz, 4MB L2, 1333MHz bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Package ID W_CC_C_9.1.033 Build no 20061103Z
 Intel Fortran Compiler for IA32 version 9.1
 Package ID W_FC_C_9.1.033 Build no 20061103Z
 Microsoft Visual Studio .NET 2003 (lib & linker)
 Auto Parallel: No
 File System: NTFS
 System State: Default

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 31.9

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 31.3

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Dec-2006

Tested by: Bull SAS

Software Availability: Dec-2006

L3 Cache: None
Other Cache: None
Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem: 73 GB SAS, 10000RPM
Other Hardware: None

Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1930	28.2	<u>1930</u>	<u>28.2</u>	1934	28.1	4	1931	28.2	<u>1930</u>	<u>28.2</u>	1929	28.2
416.gamess	4	<u>1662</u>	<u>47.1</u>	1661	47.2	1662	47.1	4	1666	47.0	1666	47.0	<u>1666</u>	<u>47.0</u>
433.milc	4	<u>2089</u>	<u>17.6</u>	2088	17.6	2090	17.6	4	<u>2081</u>	<u>17.6</u>	2089	17.6	2080	17.7
434.zeusmp	4	998	36.5	<u>996</u>	<u>36.5</u>	995	36.6	4	<u>1032</u>	<u>35.3</u>	1036	35.1	1030	35.3
435.gromacs	4	625	45.7	<u>624</u>	<u>45.8</u>	624	45.8	4	621	46.0	620	46.1	<u>620</u>	<u>46.1</u>
436.cactusADM	4	1157	41.3	<u>1157</u>	<u>41.3</u>	1156	41.3	4	<u>1167</u>	<u>41.0</u>	1167	41.0	1166	41.0
437.leslie3d	4	1925	19.5	1927	19.5	<u>1927</u>	<u>19.5</u>	4	1925	19.5	1927	19.5	<u>1925</u>	<u>19.5</u>
444.namd	4	793	40.5	791	40.6	<u>791</u>	<u>40.6</u>	4	781	41.1	779	41.2	<u>779</u>	<u>41.2</u>
447.dealII	4	917	49.9	942	48.6	<u>930</u>	<u>49.2</u>	4	833	55.0	<u>858</u>	<u>53.3</u>	864	53.0
450.soplex	4	1533	21.8	1451	23.0	<u>1454</u>	<u>22.9</u>	4	1527	21.9	<u>1444</u>	<u>23.1</u>	1442	23.1
453.povray	4	375	56.8	374	56.9	<u>374</u>	<u>56.9</u>	4	296	71.9	<u>295</u>	<u>72.0</u>	295	72.1
454.calculix	4	<u>923</u>	<u>35.7</u>	919	35.9	923	35.7	4	<u>899</u>	<u>36.7</u>	897	36.8	901	36.6
459.GemsFDTD	4	<u>2317</u>	<u>18.3</u>	2317	18.3	2313	18.3	4	2327	18.2	2372	17.9	<u>2333</u>	<u>18.2</u>
465.tonto	4	1450	27.2	<u>1460</u>	<u>27.0</u>	1535	25.6	4	1425	27.6	<u>1426</u>	<u>27.6</u>	1427	27.6
470.lbm	4	<u>3577</u>	<u>15.4</u>	3577	15.4	3578	15.4	4	3562	15.4	<u>3562</u>	<u>15.4</u>	3562	15.4
481.wrf	4	1341	33.3	1316	34.0	<u>1335</u>	<u>33.5</u>	4	1361	32.8	1332	33.5	<u>1354</u>	<u>33.0</u>
482.sphinx3	4	2240	34.8	2231	34.9	<u>2234</u>	<u>34.9</u>	4	2281	34.2	<u>2271</u>	<u>34.3</u>	2270	34.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 31.9

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 31.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2006
Hardware Availability: Dec-2006
Software Availability: Dec-2006

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-fast -Qcxx_features /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-fast /F950000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc7.1 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 31.9

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECfp_rate_base2006 = 31.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2006
Hardware Availability: Dec-2006
Software Availability: Dec-2006

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000
-link /FORCE:MULTIPLE

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:15:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.