



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 46.5

CELSIUS V840, AMD Opteron 2220

SPECfp_rate_base2006 = 45.2

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: Aug-2006

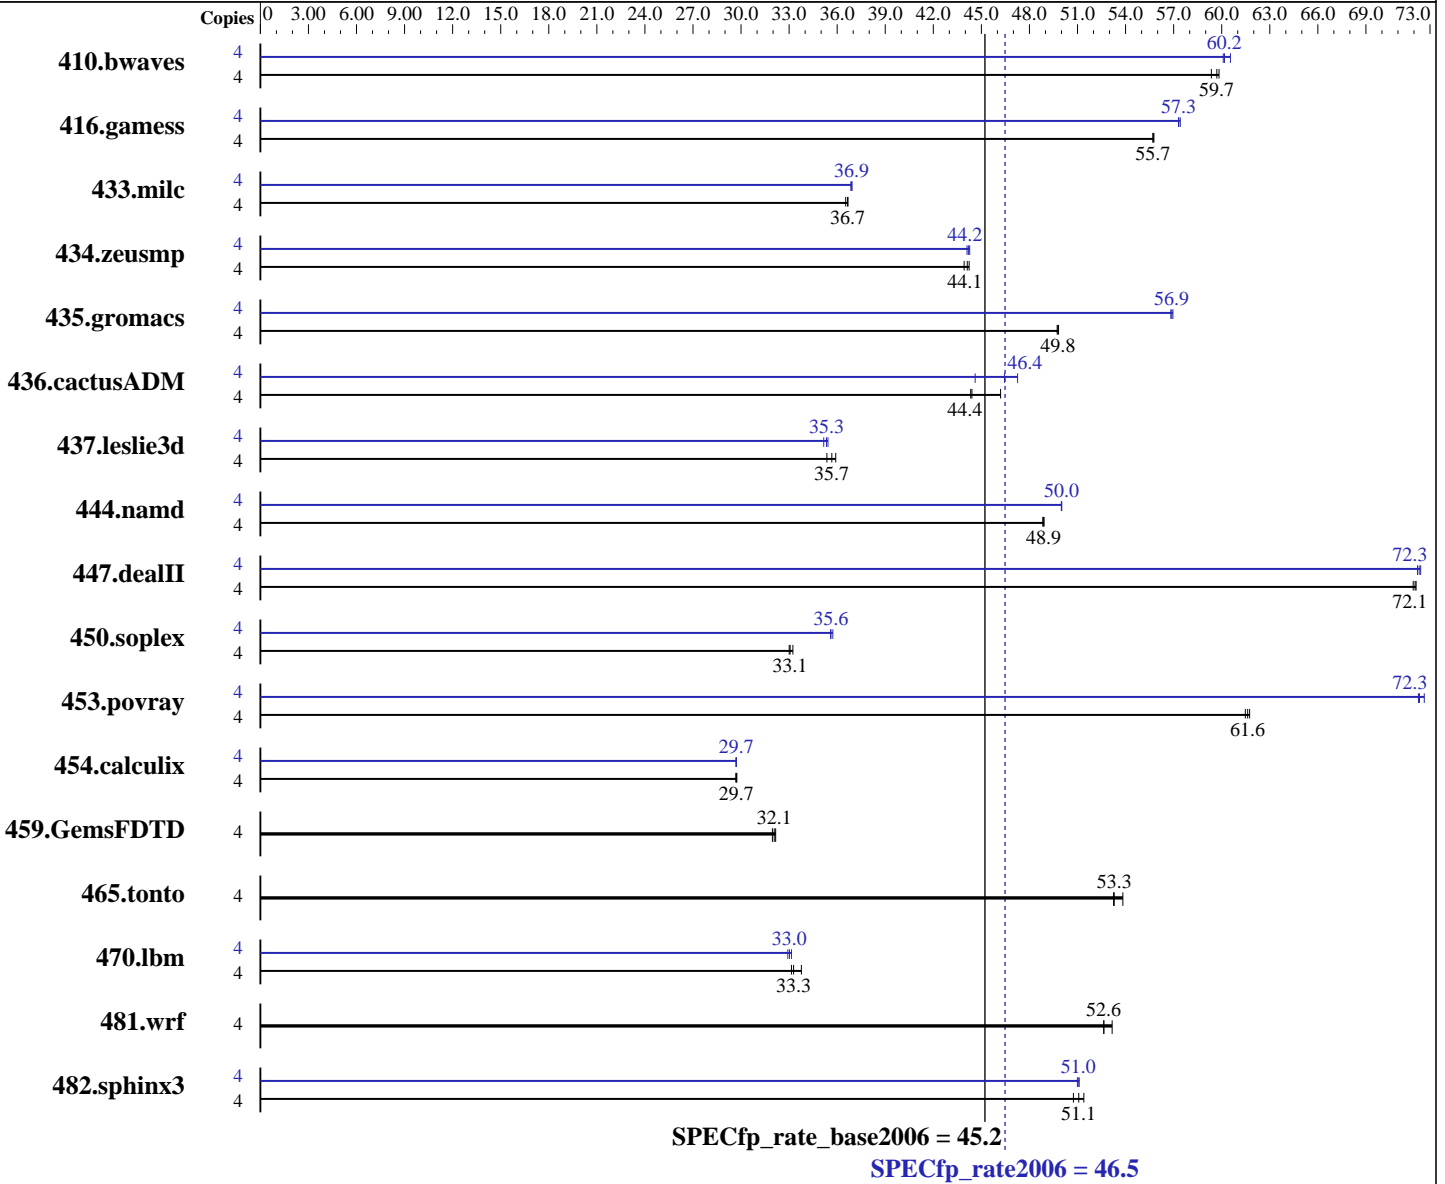

Hardware

CPU Name: AMD Opteron 2220
 CPU Characteristics: Dual Core, 2.8 GHz, 2 MB L2-cache
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SLES 10 for AMD64/EM64T
 Compiler: QLogic Pathscale Compiler Suite 2.5
 Auto Parallel: No
 File System: ext3
 System State: Multi-User SuSE Run Level 3
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 46.5

CELSIUS V840, AMD Opteron 2220

SPECfp_rate_base2006 = 45.2

CPU2006 license: 22

Test date: Feb-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Feb-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Aug-2006

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2GB DDR2-667 CL5 dual rank ECC DIMMs registered)
 Disk Subsystem: SATA II, 80 GB
 Other Hardware: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	911	59.7	909	59.8	916	59.4	4	905	60.1	898	60.5	903	60.2		
416.gamess	4	1404	55.8	1406	55.7	1406	55.7	4	1364	57.4	1366	57.3	1367	57.3		
433.milc	4	1005	36.5	1001	36.7	1002	36.7	4	994	36.9	995	36.9	996	36.9		
434.zeusmp	4	823	44.2	825	44.1	829	43.9	4	824	44.2	822	44.3	825	44.1		
435.gromacs	4	573	49.8	574	49.8	574	49.7	4	501	57.0	502	56.9	503	56.8		
436.cactusADM	4	1076	44.4	1078	44.3	1035	46.2	4	1011	47.3	1029	46.4	1071	44.6		
437.leslie3d	4	1047	35.9	1063	35.4	1054	35.7	4	1061	35.4	1069	35.2	1064	35.3		
444.namd	4	657	48.8	656	48.9	656	48.9	4	641	50.0	642	50.0	641	50.0		
447.dealII	4	634	72.1	636	71.9	635	72.1	4	634	72.2	633	72.3	632	72.4		
450.soplex	4	1011	33.0	1004	33.2	1009	33.1	4	934	35.7	937	35.6	937	35.6		
453.povray	4	346	61.5	345	61.7	345	61.6	4	293	72.6	294	72.3	294	72.3		
454.calculix	4	1110	29.7	1111	29.7	1112	29.7	4	1111	29.7	1111	29.7	1112	29.7		
459.GemsFDTD	4	1320	32.2	1323	32.1	1328	32.0	4	1320	32.2	1323	32.1	1328	32.0		
465.tonto	4	731	53.8	739	53.3	739	53.3	4	731	53.8	739	53.3	739	53.3		
470.lbm	4	1628	33.8	1652	33.3	1658	33.1	4	1658	33.2	1664	33.0	1669	32.9		
481.wrf	4	849	52.6	840	53.2	849	52.6	4	849	52.6	840	53.2	849	52.6		
482.sphinx3	4	1517	51.4	1526	51.1	1536	50.7	4	1525	51.1	1529	51.0	1527	51.0		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

powersave -f is applied to set CPU to maximum frequency prior to run
 stacksize is set to unlimited prior to run
 taskset utility used to bind CPU(s) to processes
 numactl utility used to assign to each chip its local memory

General Notes

Binaries are generated on an Opteron-based system running Suse 9.3.

BIOS default settings with
 Node memory interleave disabled, SRAT enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 46.5

CELSIUS V840, AMD Opteron 2220

SPECfp_rate_base2006 = 45.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: Aug-2006

General Notes (Continued)

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 46.5

CELSIUS V840, AMD Opteron 2220

SPECfp_rate_base2006 = 45.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Base Optimization Flags (Continued)

Fortran benchmarks:
-Ofast

Benchmarks using both Fortran and C:
-Ofast

Peak Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

470.lbm: Same as 433.milc

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:sclrze=off -LNO:prefetch=1

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

447.dealIII: -Ofast -fno-exceptions

450.soplex: -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -fno-exceptions

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 46.5

CELSIUS V840, AMD Opteron 2220

SPECfp_rate_base2006 = 45.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Peak Optimization Flags (Continued)

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

434.zeusmp: -O3 -CG:load_exe=0

437.leslie3d: -O3 -OPT:Ofast

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5
-ipa

454.calculix: -Ofast

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.14.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.14.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:32:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2007.