



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = **11.2**

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECint_base2006 = **10.6**

CPU2006 license: 3


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

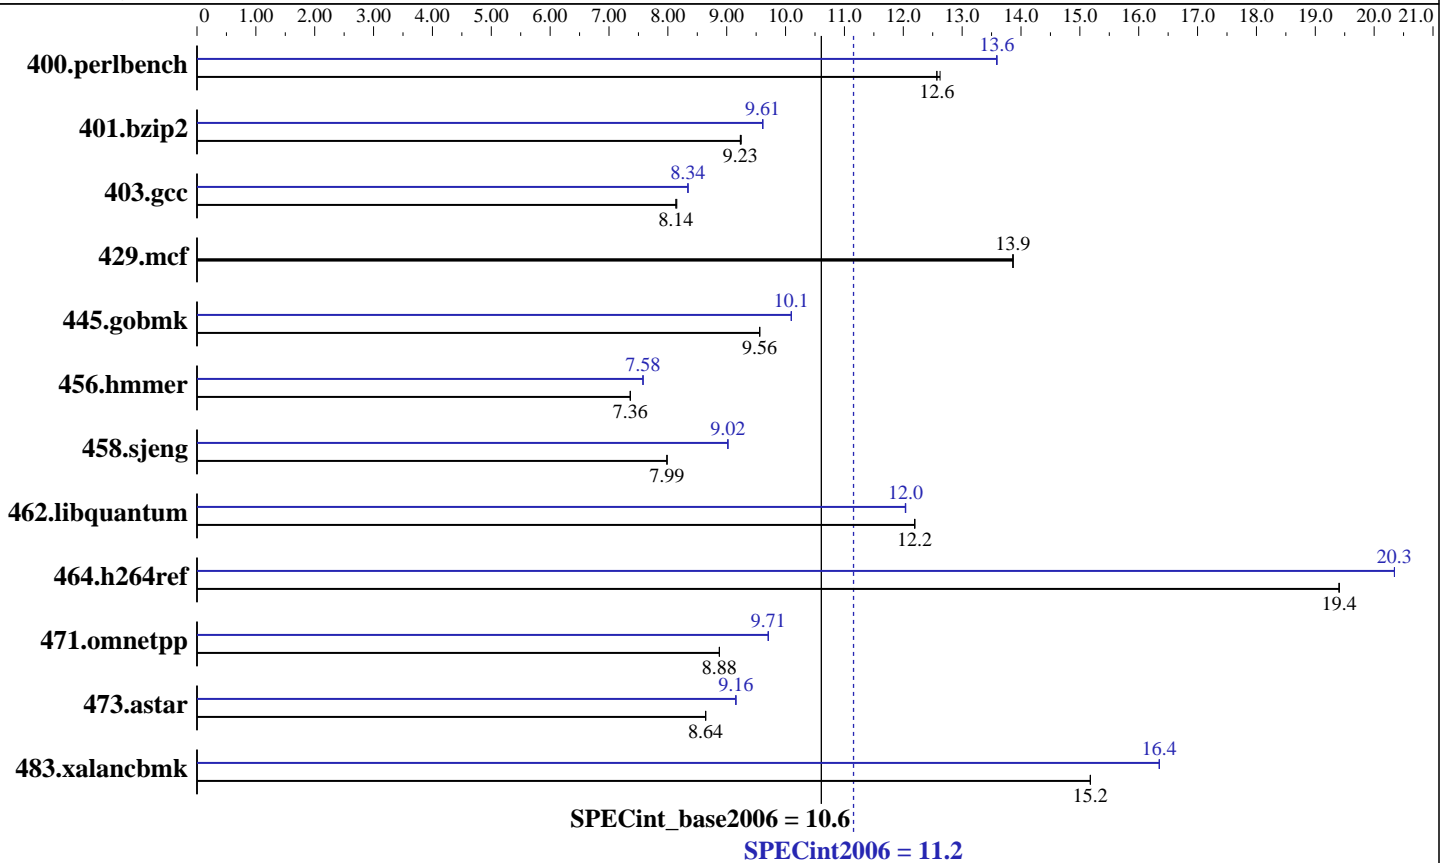

Hardware

CPU Name: Intel Xeon 7140M
 CPU Characteristics: 3.4GHz, 800MHz bus
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (16X1GB 1Rx4 PC2-3200R-333 400MHz DDR2)
 Disk Subsystem: 2x36GB SAS 15000 rpm
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise X64 Edition
 Compiler: Intel C++ Compiler 9.1 for 32-bit
 Build 20061103Z Package ID: W_CC_P_9.1.033
 Microsoft Visual Studio .NET 2003 (libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **11.2**

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECint_base2006 = **10.6**

CPU2006 license: 3

Test date: Mar-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	774	12.6	<u>777</u>	<u>12.6</u>	777	12.6	719	13.6	<u>719</u>	<u>13.6</u>	719	13.6
401.bzip2	1044	9.25	1045	9.23	<u>1045</u>	<u>9.23</u>	1004	9.62	1004	9.61	<u>1004</u>	<u>9.61</u>
403.gcc	987	8.15	<u>989</u>	<u>8.14</u>	989	8.14	965	8.34	<u>965</u>	<u>8.34</u>	965	8.34
429.mcf	<u>658</u>	<u>13.9</u>	658	13.9	658	13.9	<u>658</u>	<u>13.9</u>	658	13.9	658	13.9
445.gobmk	<u>1097</u>	<u>9.56</u>	1097	9.56	1097	9.56	1039	10.1	<u>1039</u>	<u>10.1</u>	1039	10.1
456.hammer	<u>1267</u>	<u>7.36</u>	1267	7.36	1267	7.36	1231	7.58	<u>1231</u>	<u>7.58</u>	1231	7.58
458.sjeng	1515	7.98	<u>1515</u>	<u>7.99</u>	1515	7.99	1341	9.02	<u>1341</u>	<u>9.02</u>	1342	9.02
462.libquantum	<u>1699</u>	<u>12.2</u>	1699	12.2	1699	12.2	<u>1721</u>	<u>12.0</u>	1721	12.0	1722	12.0
464.h264ref	1140	19.4	1140	19.4	<u>1140</u>	<u>19.4</u>	1088	20.3	1088	20.3	<u>1088</u>	<u>20.3</u>
471.omnetpp	704	8.88	<u>704</u>	<u>8.88</u>	704	8.87	644	9.71	<u>644</u>	<u>9.71</u>	644	9.70
473.astar	<u>812</u>	<u>8.64</u>	812	8.64	812	8.64	767	9.16	<u>767</u>	<u>9.16</u>	767	9.15
483.xalancbmk	<u>455</u>	<u>15.2</u>	455	15.2	455	15.2	422	16.4	<u>422</u>	<u>16.4</u>	422	16.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes
/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

The NovaScale T880 and the NovaScale R480 models are electronically equivalent.
The results have been measured on a NovaScale R480 model.

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 11.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECint_base2006 = 10.6

CPU2006 license: 3

Test date: Mar-2007

Test sponsor: Bull SAS

Hardware Availability: Sep-2006

Tested by: Bull SAS

Software Availability: Nov-2006

Base Portability Flags (Continued)

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:

-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 11.2

NovaScale R480 (3.40 GHz, Intel Xeon 7140M)

SPECint_base2006 = 10.6

CPU2006 license: 3

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: Same as 400.perlbench

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:05:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2007.