



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

SPECfp®\_rate2006 = 25.7

SPECfp\_rate\_base2006 = 24.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

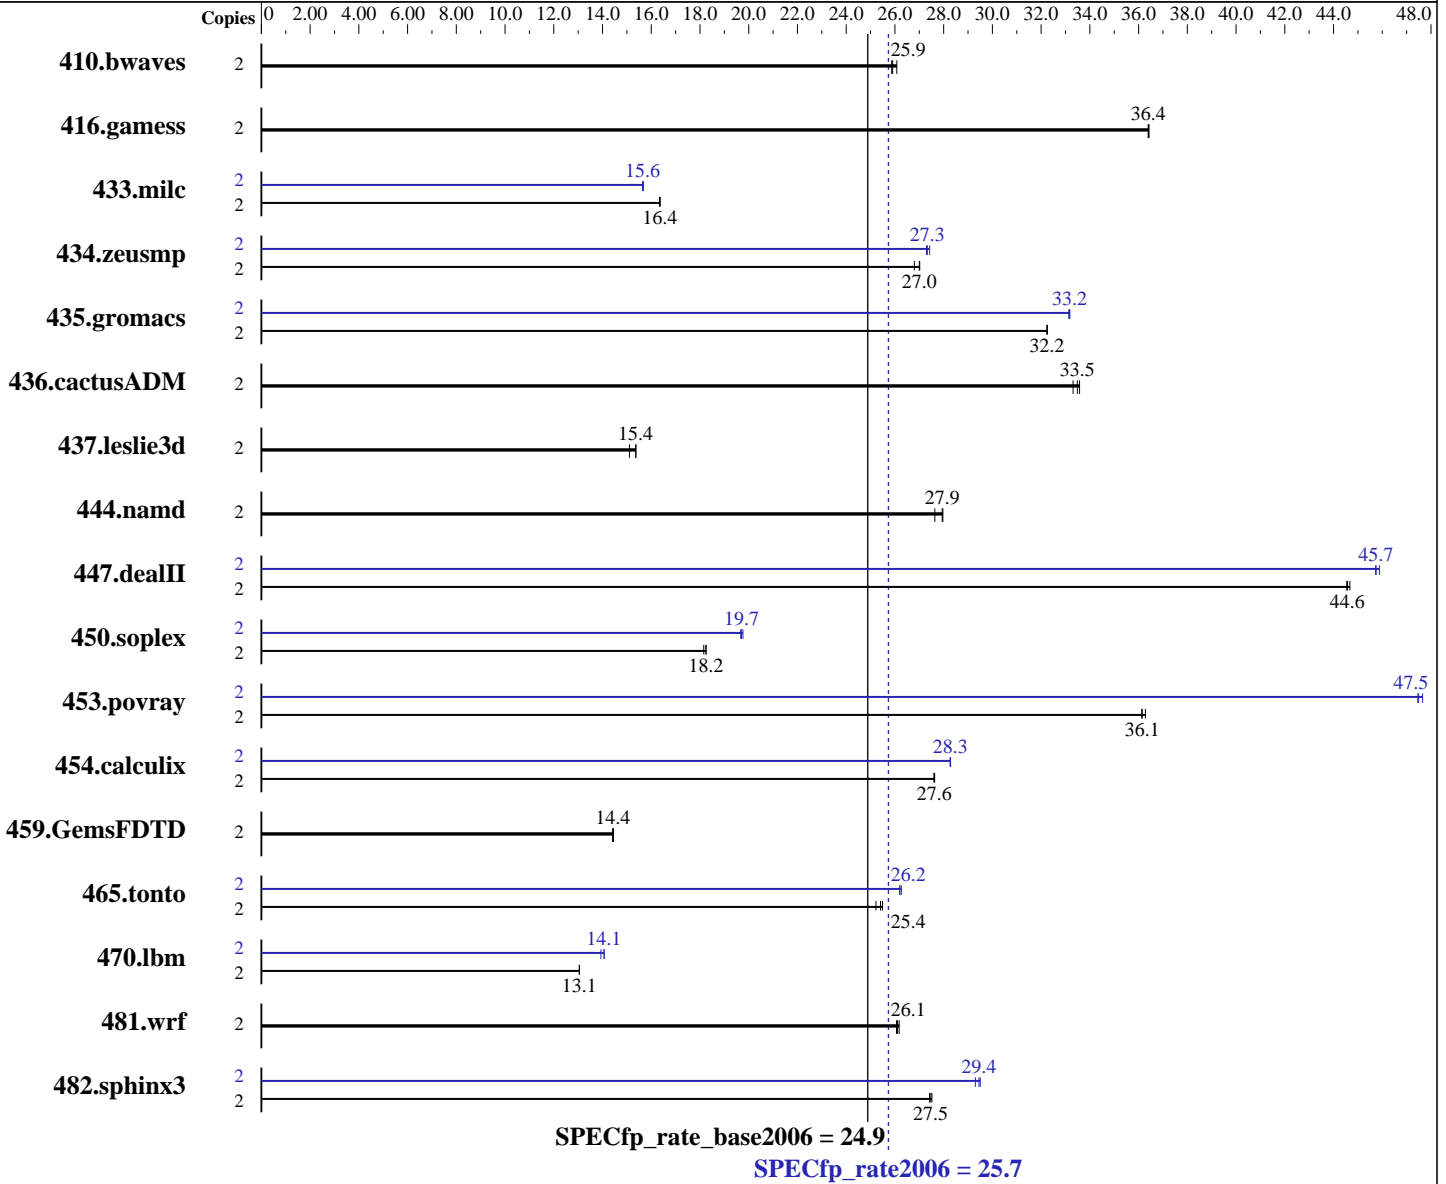

### Hardware

CPU Name: Intel Xeon 3070  
 CPU Characteristics: 1067 MHz system bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l\_fc\_p\_9.1.043  
 Auto Parallel: No  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

SPECfp\_rate2006 = **25.7**

SPECfp\_rate\_base2006 = **24.9**

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4x2 GB DDR2 PC2-4200E, 2 rank, CAS 4-4-4, with ECC)  
Disk Subsystem: SATA (160 GB 7200 rpm)  
Other Hardware: None

System State: Multiuser, Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	2	1042	26.1	<b>1049</b>	<b>25.9</b>	1051	25.9	2	1042	26.1	<b>1049</b>	<b>25.9</b>	1051	25.9		
416.gamess	2	1076	36.4	<b>1076</b>	<b>36.4</b>	1075	36.4	2	1076	36.4	<b>1076</b>	<b>36.4</b>	1075	36.4		
433.milc	2	<b>1122</b>	<b>16.4</b>	1122	16.4	1124	16.3	2	1171	15.7	1174	15.6	<b>1173</b>	<b>15.6</b>		
434.zeusmp	2	679	26.8	<b>674</b>	<b>27.0</b>	674	27.0	2	667	27.3	664	27.4	<b>666</b>	<b>27.3</b>		
435.gromacs	2	443	32.2	443	32.2	<b>443</b>	<b>32.2</b>	2	431	33.1	<b>431</b>	<b>33.2</b>	430	33.2		
436.cactusADM	2	<b>714</b>	<b>33.5</b>	712	33.6	717	33.3	2	<b>714</b>	<b>33.5</b>	712	33.6	717	33.3		
437.leslie3d	2	<b>1223</b>	<b>15.4</b>	1244	15.1	1223	15.4	2	<b>1223</b>	<b>15.4</b>	1244	15.1	1223	15.4		
444.namd	2	<b>574</b>	<b>27.9</b>	574	28.0	580	27.6	2	<b>574</b>	<b>27.9</b>	574	28.0	580	27.6		
447.dealII	2	<b>513</b>	<b>44.6</b>	514	44.5	512	44.7	2	500	45.7	<b>500</b>	<b>45.7</b>	499	45.9		
450.soplex	2	919	18.2	<b>914</b>	<b>18.2</b>	914	18.2	2	844	19.8	<b>846</b>	<b>19.7</b>	848	19.7		
453.povray	2	294	36.1	<b>294</b>	<b>36.1</b>	293	36.3	2	224	47.5	<b>224</b>	<b>47.5</b>	223	47.7		
454.calculix	2	597	27.6	<b>597</b>	<b>27.6</b>	598	27.6	2	<b>584</b>	<b>28.3</b>	583	28.3	584	28.3		
459.GemsFDTD	2	<b>1471</b>	<b>14.4</b>	1472	14.4	1468	14.5	2	<b>1471</b>	<b>14.4</b>	1472	14.4	1468	14.5		
465.tonto	2	772	25.5	<b>775</b>	<b>25.4</b>	780	25.2	2	749	26.3	751	26.2	<b>751</b>	<b>26.2</b>		
470.lbm	2	2106	13.0	<b>2105</b>	<b>13.1</b>	2105	13.1	2	<b>1954</b>	<b>14.1</b>	1954	14.1	1972	13.9		
481.wrf	2	<b>856</b>	<b>26.1</b>	857	26.1	853	26.2	2	<b>856</b>	<b>26.1</b>	857	26.1	853	26.2		
482.sphinx3	2	<b>1419</b>	<b>27.5</b>	1417	27.5	1422	27.4	2	1330	29.3	1321	29.5	<b>1324</b>	<b>29.4</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 1067 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with  
32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers in your country please see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

**SPECfp\_rate2006 = 25.7**

**SPECfp\_rate\_base2006 = 24.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## General Notes (Continued)

<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

**SPECfp\_rate2006 = 25.7**

**SPECfp\_rate\_base2006 = 24.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks:

```
/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib
```

Fortran benchmarks (except as noted below):

ifort

```
434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

SPECfp\_rate2006 = 25.7

SPECfp\_rate\_base2006 = 24.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

## Peak Optimization Flags (Continued)

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX150 S5, Intel Xeon processor 3070,  
2.66 GHz

**SPECfp\_rate2006 = 25.7**

**SPECfp\_rate\_base2006 = 24.9**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:47:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 May 2007.