



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2007

Hardware Availability: Jun-2007

Software Availability: Jun-2007

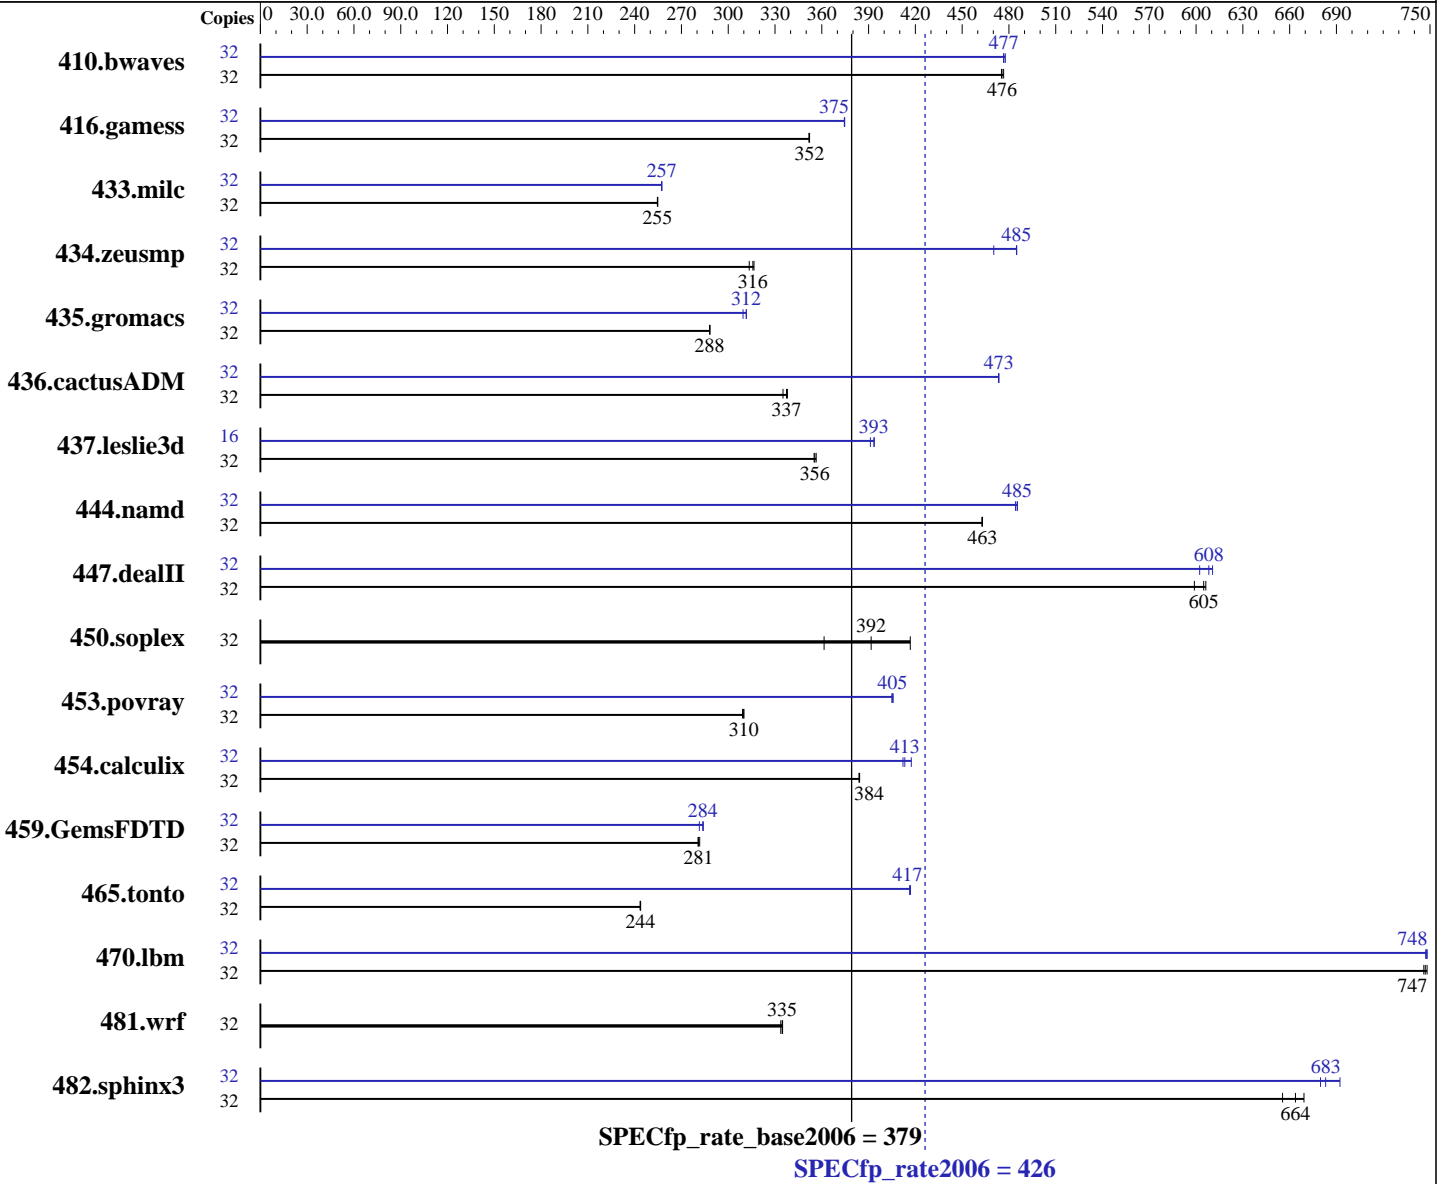

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Software

Operating System: IBM AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX
 XL Fortran Enterprise Edition Version 11.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: --

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB 2x146 GB SAS 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	912	477	914	476	915	475	32	913	477	912	477	910	478
416.gamess	32	1779	352	1779	352	1781	352	32	1673	375	1673	374	1672	375
433.milc	32	1154	255	1153	255	1153	255	32	1142	257	1141	257	1142	257
434.zeusmp	32	929	313	922	316	920	317	32	601	485	600	485	619	470
435.gromacs	32	792	288	793	288	793	288	32	738	310	733	312	733	312
436.cactusADM	32	1131	338	1133	337	1141	335	32	808	473	808	474	808	473
437.leslie3d	32	844	356	847	355	846	356	16	382	394	382	393	384	391
444.namd	32	554	463	555	463	554	463	32	529	485	530	484	529	485
447.dealII	32	604	606	611	599	605	605	32	608	602	600	611	602	608
450.soplex	32	681	392	738	361	640	417	32	681	392	738	361	640	417
453.povray	32	549	310	549	310	551	309	32	420	405	420	406	420	405
454.calculix	32	687	384	687	384	688	384	32	639	413	632	417	641	412
459.GemsFDTD	32	1210	281	1205	282	1208	281	32	1206	281	1197	284	1195	284
465.tonto	32	1293	243	1291	244	1292	244	32	756	416	756	417	755	417
470.lbm	32	589	746	589	747	588	748	32	588	748	588	747	588	748
481.wrf	32	1071	334	1067	335	1068	335	32	1071	334	1067	335	1068	335
482.sphinx3	32	940	664	952	655	932	669	32	917	680	913	683	901	692

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file for details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTIOPTS=intrinthds=1

System set to "Enhanced" mode when defining partition on HMC

6144 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of

410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3

submit used to bind benchmark to a processor using "bindprocessor"

The "IBM System p 570" and "IBM System i 570" are electronically equivalent.

The results have been measured on the "IBM System p 570" model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all

-D__IBM_FAST_VECTOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap

-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS

-qsmallstack=dynlenonheap -qalias=nostd -blpdata



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

447.dealIII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qalign=natural -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -qxlf90=nosignedzero
-blpdata

437.leslie3d: -O5 -qlargepage -q64 -blpdata

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -D_ILS_MACROS -blpdata

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 426

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate_base2006 = 379

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:07:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.