SPEC® CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint®_rate2006 =   98.1

SPECint_rate_base2006 = 91.5

CPU2006 license: 55	**Test date:** Aug-2007
Test sponsor: Dell Inc.	**Hardware Availability:** Aug-2007
Tested by: Dell Inc.	**Software Availability:** Jun-2007

SPECint_rate_base2006 = 91.5

SPECint_rate2006 = 98.1
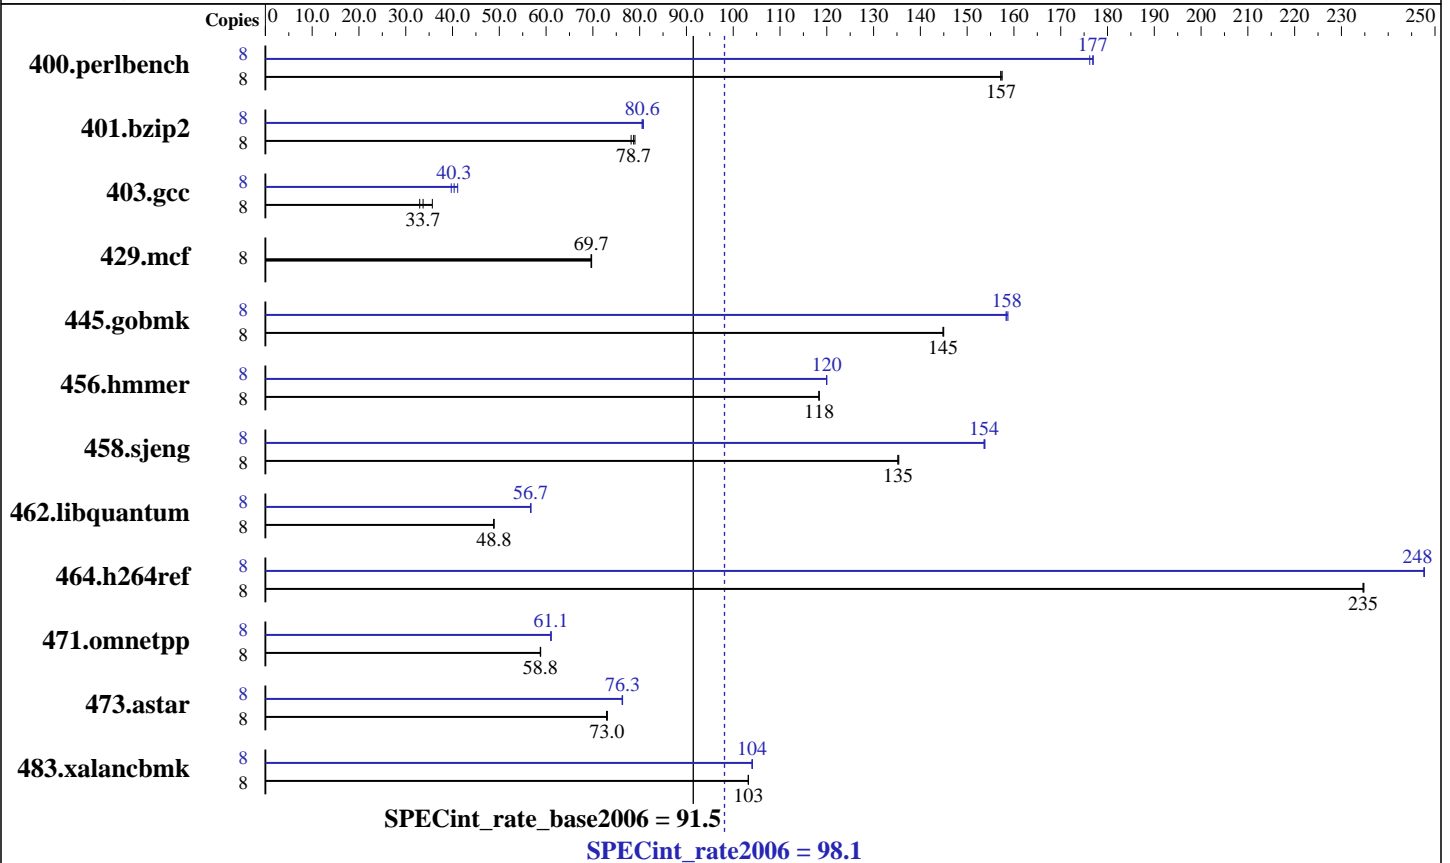
Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	1333 MHz Bus Speed
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem:	1 x 73GB SAS 10K RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional x64 Edition SP2
Compiler:	Intel C++ Compiler for IA-32, Version 10.0 Build 20070426 Package ID: W_CC_P_10.0.025 Microsoft Visual Studio 2005 SP1
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint_rate2006 = 98.1

SPECint_rate_base2006 = 91.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

Results Table

Benchmark	Copies	Base Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Peak Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	496	157	497	157	**497**	**157**	8	444	176	**442**	**177**	442	177
401.bzip2	8	977	79.0	**981**	**78.7**	988	78.2	8	955	80.8	**958**	**80.6**	958	80.5
403.gcc	8	1952	33.0	1805	35.7	**1910**	**33.7**	8	1621	39.7	**1596**	**40.3**	1567	41.1
429.mcf	8	**1047**	**69.7**	1048	69.6	1046	69.7	8	**1047**	**69.7**	1048	69.6	1046	69.7
445.gobmk	8	579	145	**579**	**145**	579	145	8	530	158	529	159	**530**	**158**
456.hmmer	8	631	118	631	118	**631**	**118**	8	**622**	**120**	622	120	622	120
458.sjeng	8	**716**	**135**	715	135	716	135	8	630	154	629	154	**630**	**154**
462.libquantum	8	**3393**	**48.8**	3393	48.9	3395	48.8	8	2922	56.7	2923	56.7	**2922**	**56.7**
464.h264ref	8	**754**	**235**	754	235	755	235	8	715	248	715	248	**715**	**248**
471.omnetpp	8	850	58.8	851	58.8	**850**	**58.8**	8	820	61.0	819	61.1	**819**	**61.1**
473.astar	8	770	72.9	768	73.1	**769**	**73.0**	8	737	76.2	736	76.3	**736**	**76.3**
483.xalancbmk	8	535	103	**535**	**103**	535	103	8	531	104	**530**	**104**	530	104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
   Binaries were built on Windows Vista Ultimate (64-bit)

   BIOS Settings
     Snoop Filter                 : OFF
     Adjacent Cache Line Prefetch : OFF
     Hardware Prefetcher          : OFF

   Snoop Filter
     Preserves cache coherency while minimizing snoops
     to remote nodes.

   Adjacent Cache Line Prefetch
     Prefetch data in order to shorten execution cycles
     and maximize data processing efficiency.
```

Base Compiler Invocation

C benchmarks:
```
     icl -Qstd=c99
```

C++ benchmarks:
```
     icl
```

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint_rate2006 =   98.1

SPECint_rate_base2006 = 91.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

Base Portability Flags

        403.gcc: -DSPEC_CPU_WIN32
     464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
    -fast /F512000000 shlw32m.lib   -link /FORCE:MULTIPLE

C++ benchmarks:
    -fast -Qcxx_features /F512000000 shlw32m.lib
              -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

        403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
    icl -Qstd=c99

C++ benchmarks:
    icl

Peak Portability Flags

        403.gcc: -DSPEC_CPU_WIN32
     464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:

    400.perlbench: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
              -Qansi-alias -Qprefetch /F512000000 shlw32m.lib
                   -link /FORCE:MULTIPLE

Continued on next page

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint_rate2006 = 98.1

SPECint_rate_base2006 = 91.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

Peak Optimization Flags (Continued)

```
    401.bzip2: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
               /F512000000 shlw32m.lib           -link /FORCE:MULTIPLE

      403.gcc: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
               /F512000000                -link /FORCE:MULTIPLE

      429.mcf: basepeak = yes

    445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
               -Qprec-div- -Qansi-alias /F512000000
                          -link /FORCE:MULTIPLE

    456.hmmer: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
               -Qunroll2 -Qansi-alias /F512000000 shlw32m.lib
                          -link /FORCE:MULTIPLE

    458.sjeng: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
               -Qunroll4 /F512000000 shlw32m.lib
                          -link /FORCE:MULTIPLE

462.libquantum: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
               -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always
               /F512000000 shlw32m.lib           -link /FORCE:MULTIPLE

    464.h264ref: Same as 456.hmmer

C++ benchmarks:
    ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
    -Qcxx_features /F512000000 shlw32m.lib
              -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

```
      403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.xml

SPEC CINT2006 Result
Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint_rate2006 = 98.1

SPECint_rate_base2006 = 91.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance
Evaluation Corporation. All other brand and product names appearing in
this result are trademarks or registered trademarks of their respective
holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:10:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.