



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint<sup>®</sup>2006 = 20.0

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint\_base2006 = 18.1

CPU2006 license: 55


Test date: Jul-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

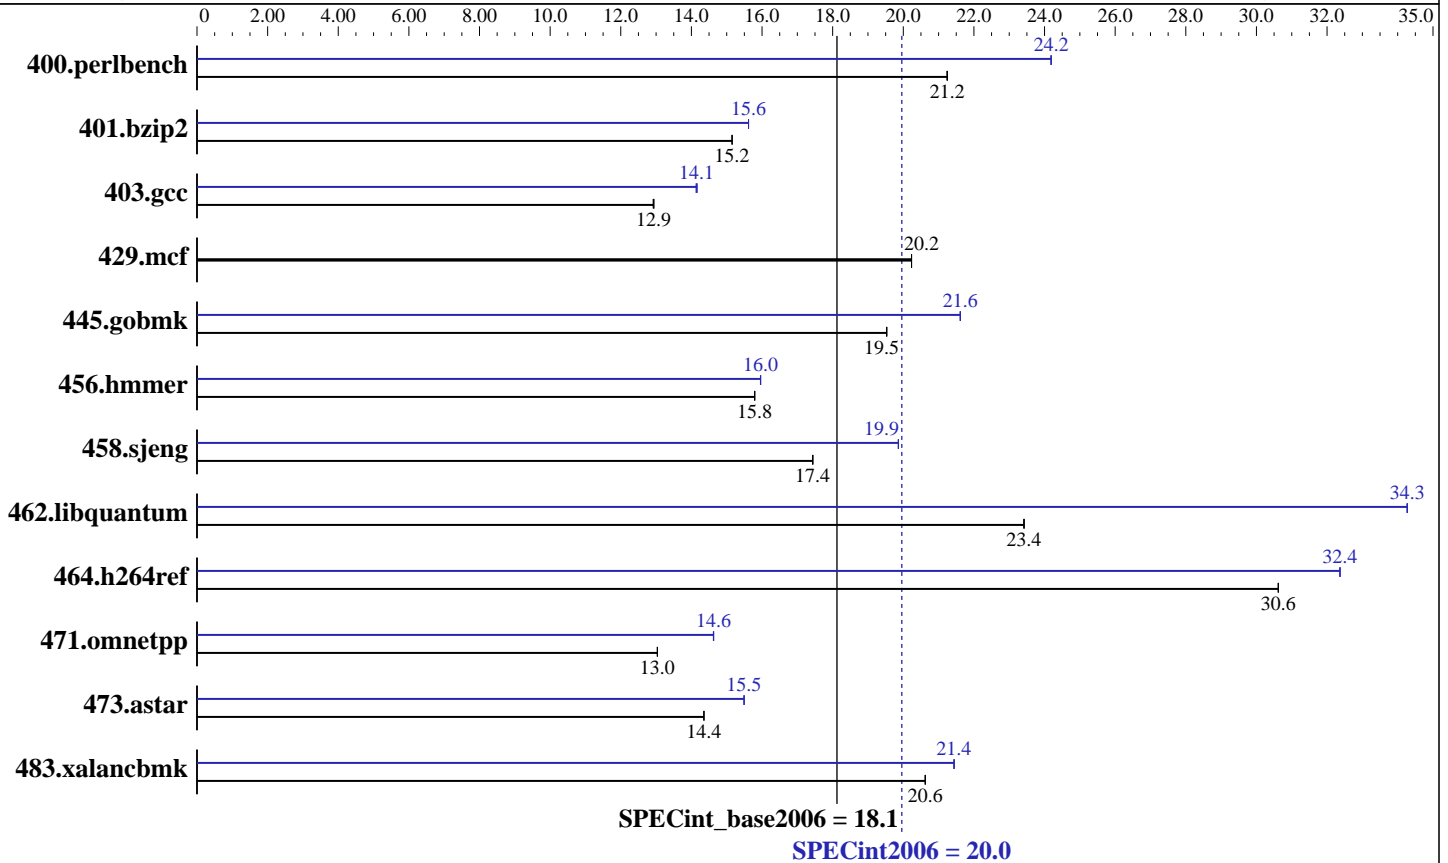

### Hardware

CPU Name: Intel Xeon X5365  
 CPU Characteristics: 1333 MHz Bus Speed  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 73GB SAS 10K RPM  
 Other Hardware: None

### Software

Operating System: Windows XP Professional x64 Edition SP2  
 Compiler: Intel C++ Compiler for IA-32, Version 10.0  
 Build 20070426 Package ID: W\_CC\_P\_10.0.025  
 Microsoft Visual Studio 2005 SP1  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 20.0

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint\_base2006 = 18.1

CPU2006 license: 55

Test date: Jul-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

## Results Table

| Benchmark      | Base       |             |            |             |            |             | Peak       |             |            |             |            |             |
|----------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|------------|-------------|
|                | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 460        | 21.3        | <b>460</b> | <b>21.2</b> | 460        | 21.2        | <b>404</b> | <b>24.2</b> | 404        | 24.2        | 404        | 24.2        |
| 401.bzip2      | <b>637</b> | <b>15.2</b> | 637        | 15.2        | 637        | 15.1        | <b>618</b> | <b>15.6</b> | 618        | 15.6        | 618        | 15.6        |
| 403.gcc        | 623        | 12.9        | 622        | 12.9        | <b>623</b> | <b>12.9</b> | <b>569</b> | <b>14.1</b> | 570        | 14.1        | 568        | 14.2        |
| 429.mcf        | 451        | 20.2        | 451        | 20.2        | <b>451</b> | <b>20.2</b> | 451        | 20.2        | 451        | 20.2        | <b>451</b> | <b>20.2</b> |
| 445.gobmk      | 537        | 19.5        | <b>537</b> | <b>19.5</b> | 537        | 19.5        | 485        | 21.6        | 485        | 21.6        | <b>485</b> | <b>21.6</b> |
| 456.hammer     | 591        | 15.8        | <b>591</b> | <b>15.8</b> | 591        | 15.8        | 585        | 16.0        | 585        | 16.0        | <b>585</b> | <b>16.0</b> |
| 458.sjeng      | 694        | 17.4        | 694        | 17.4        | <b>694</b> | <b>17.4</b> | <b>609</b> | <b>19.9</b> | 609        | 19.9        | 609        | 19.9        |
| 462.libquantum | 885        | 23.4        | 885        | 23.4        | <b>885</b> | <b>23.4</b> | <b>605</b> | <b>34.3</b> | 605        | 34.3        | 605        | 34.3        |
| 464.h264ref    | 723        | 30.6        | <b>723</b> | <b>30.6</b> | 723        | 30.6        | 684        | 32.4        | <b>684</b> | <b>32.4</b> | 684        | 32.4        |
| 471.omnetpp    | 479        | 13.0        | <b>479</b> | <b>13.0</b> | 479        | 13.0        | 427        | 14.6        | 427        | 14.6        | <b>427</b> | <b>14.6</b> |
| 473.astar      | 489        | 14.4        | <b>489</b> | <b>14.4</b> | 489        | 14.4        | 453        | 15.5        | 453        | 15.5        | <b>453</b> | <b>15.5</b> |
| 483.xalancbmk  | <b>335</b> | <b>20.6</b> | 335        | 20.6        | 335        | 20.6        | 322        | 21.4        | <b>322</b> | <b>21.4</b> | 322        | 21.4        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

### BIOS Settings

Snoop Filter : OFF  
 Adjacent Cache Line Prefetch : OFF  
 Hardware Prefetcher : ON

### Snoop Filter

Preserves cache coherency while minimizing snoops to remote nodes.

### Adjacent Cache Line Prefetch

Prefetch data in order to shorten execution cycles and maximize data processing efficiency.

## Base Compiler Invocation

C benchmarks:  
icl -Qstd=c99

C++ benchmarks:  
icl



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 20.0

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint\_base2006 = 18.1

CPU2006 license: 55

Test date: Jul-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qstd=c99

C++ benchmarks:  
icl

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:  
400.perlbench: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
-Qansi-alias -Qprefetch /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 20.0

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint\_base2006 = 18.1

CPU2006 license: 55

Test date: Jul-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

## Peak Optimization Flags (Continued)

401.bzip2: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

403.gcc: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
/F512000000 -link /FORCE:MULTIPLE

429.mcf: basepeak = yes

445.gobmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qipo  
-Qprec-div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE

456.hmmmer: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
-Qunroll12 -Qansi-alias /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

458.sjeng: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
-Qunroll14 /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

462.libquantum: ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast  
-Qunroll14 -Ob0 -Qprefetch -Qopt-streaming-stores:always  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

464.h264ref: Same as 456.hmmmer

C++ benchmarks:

ONESTEP -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 20.0

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECint\_base2006 = 18.1

CPU2006 license: 55

Test date: Jul-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:16:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 September 2007.