



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = **23.2**

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor 5160)

SPECint_base2006 = **19.7**

CPU2006 license: 3


Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

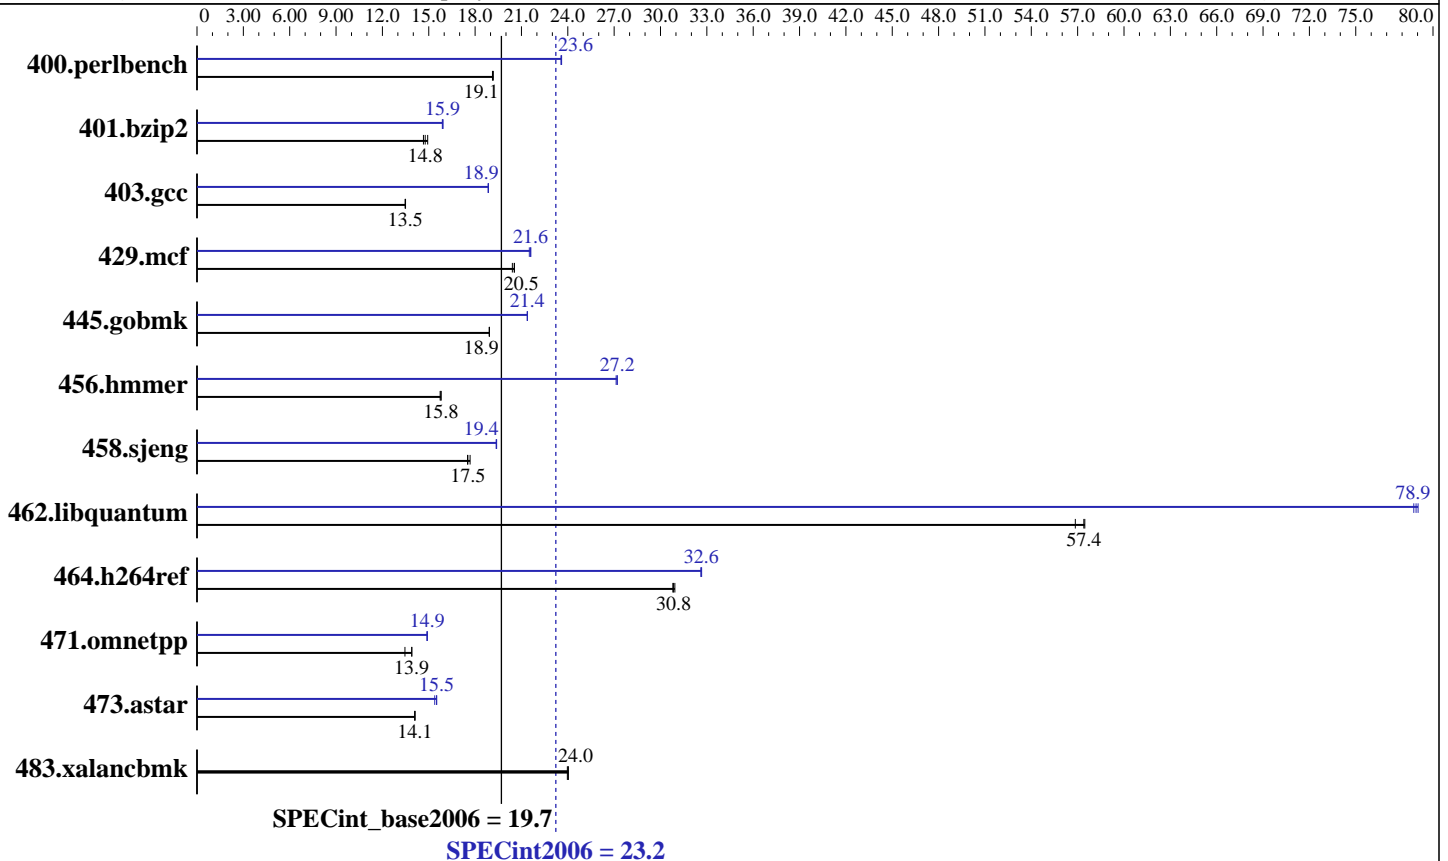

Hardware

CPU Name: Intel Xeon 5160
 CPU Characteristics: 3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB PC2-5300F CL5)
 Disk Subsystem: 1x72 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1
 kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64
 version 10.1
 Build 20070824
 Auto Parallel: Yes
 File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1
 binutils-2.17.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = **23.2**

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor 5160)

SPECint_base2006 = **19.7**

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	511	19.1	510	19.1	510	19.2	414	23.6	414	23.6	415	23.6
401.bzip2	658	14.7	646	14.9	653	14.8	608	15.9	606	15.9	607	15.9
403.gcc	597	13.5	597	13.5	596	13.5	427	18.9	427	18.9	427	18.8
429.mcf	444	20.5	447	20.4	444	20.5	422	21.6	424	21.5	422	21.6
445.gobmk	555	18.9	554	18.9	554	18.9	491	21.4	491	21.4	490	21.4
456.hmmer	593	15.7	591	15.8	591	15.8	343	27.2	343	27.2	344	27.1
458.sjeng	690	17.5	691	17.5	685	17.7	625	19.4	624	19.4	624	19.4
462.libquantum	361	57.4	361	57.5	364	56.8	263	78.9	262	79.0	263	78.8
464.h264ref	719	30.8	716	30.9	717	30.8	678	32.6	678	32.7	678	32.6
471.omnetpp	464	13.5	450	13.9	450	13.9	419	14.9	419	14.9	420	14.9
473.astar	498	14.1	498	14.1	498	14.1	456	15.4	453	15.5	453	15.5
483.xalancbmk	287	24.0	287	24.0	288	24.0	287	24.0	287	24.0	288	24.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 23.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor 5160)

SPECint_base2006 = 19.7

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -vec-guard-write -opt-malloc-options=3 -parallel
-par-runtime-control

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 23.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor 5160)

SPECint_base2006 = 19.7

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmcr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 23.2

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor 5160)

SPECint_base2006 = 19.7

CPU2006 license: 3

Test date: Aug-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:05:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2007.