



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R422
(Intel Xeon processor 5160,3.00GHz)

SPECfp[®]_rate2006 = 46.3

SPECfp_rate_base2006 = 44.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Sep-2007

Hardware Availability: Aug-2007

Software Availability: Aug-2007

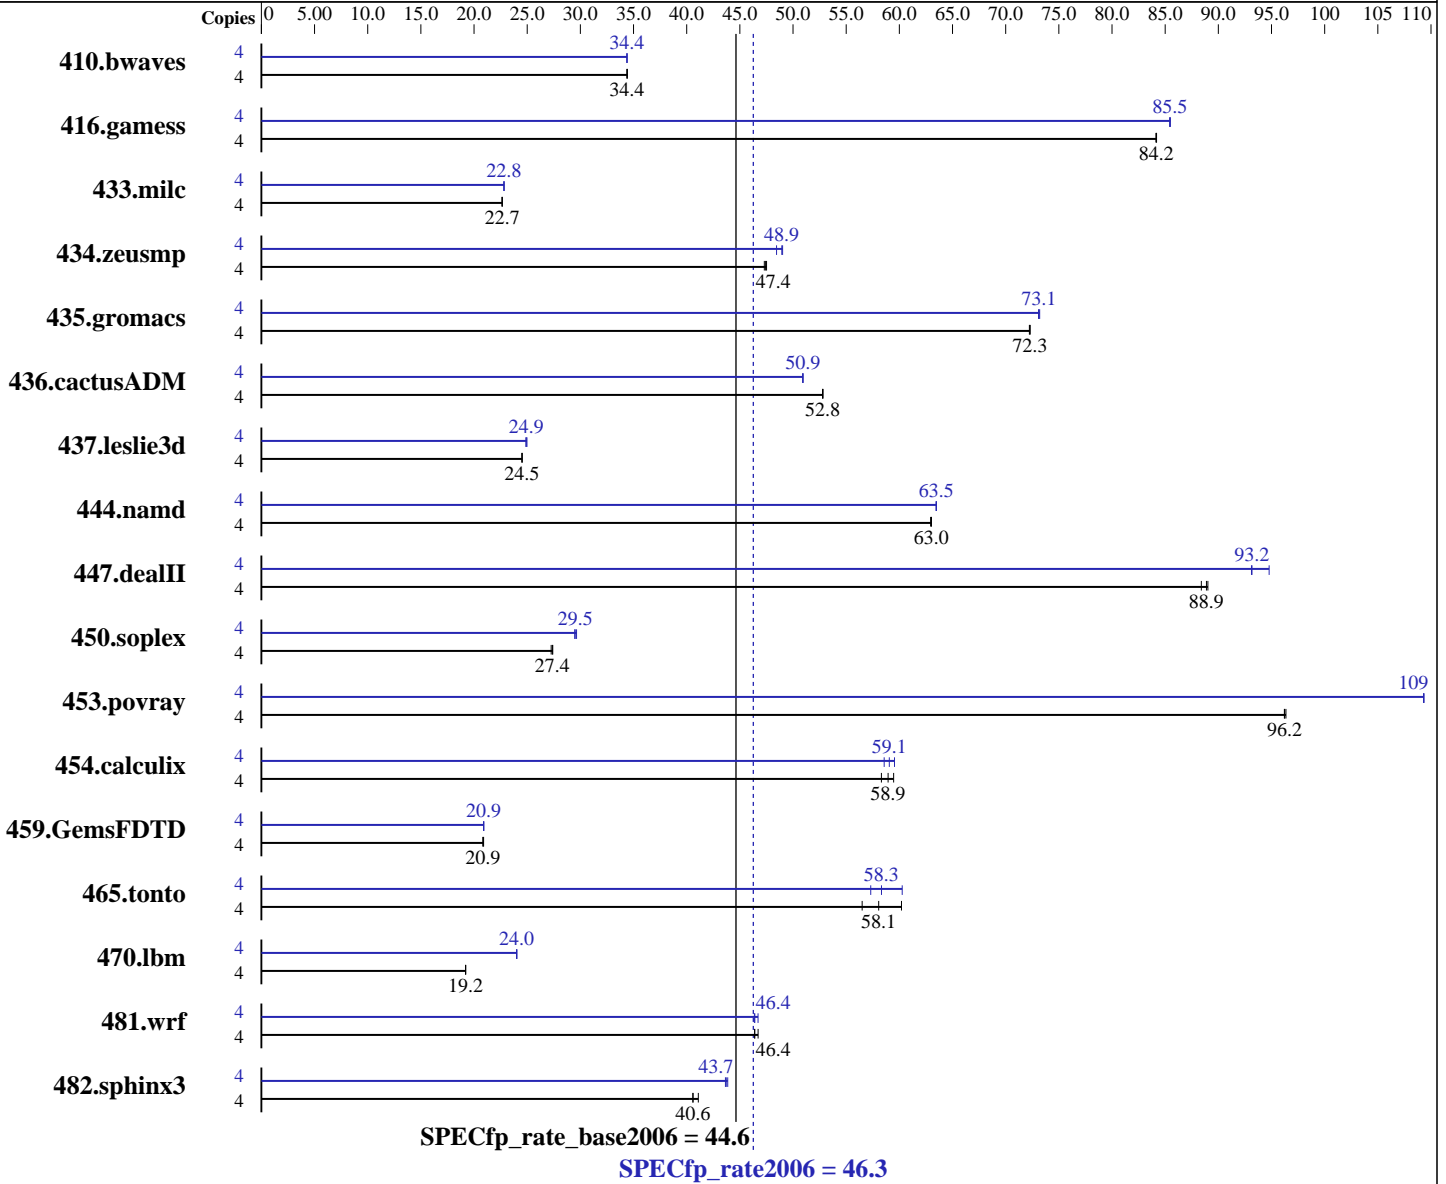

Hardware

CPU Name: Intel Xeon 5160
 CPU Characteristics: 3.00 GHz, 4 MB L2, 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: SUSE LINUX Enterprise Server 10
 Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application version 10.0
 Build 20070809 Package ID: l_cc_p_10.0.026
 Intel Fortran Compiler for IA32/EM64T application version 10.0
 Build 20070809 Package ID: l_fc_p_10.0.026
 Auto Parallel: No
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R422
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 46.3

SPECfp_rate_base2006 = 44.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Sep-2007

Hardware Availability: Aug-2007

Software Availability: Aug-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x147 GB SAS, 15000 RPM
Other Hardware: None

System State: Multi-user run level 3
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1579	34.4	<u>1581</u>	<u>34.4</u>	1581	34.4	4	1581	34.4	1581	34.4	<u>1581</u>	<u>34.4</u>
416.gamess	4	930	84.2	<u>930</u>	<u>84.2</u>	931	84.1	4	<u>916</u>	<u>85.5</u>	916	85.5	917	85.4
433.milc	4	<u>1621</u>	<u>22.7</u>	1622	22.6	1621	22.7	4	1609	22.8	<u>1609</u>	<u>22.8</u>	1610	22.8
434.zeusmp	4	766	47.5	770	47.3	<u>768</u>	<u>47.4</u>	4	<u>744</u>	<u>48.9</u>	743	49.0	751	48.5
435.gromacs	4	395	72.3	<u>395</u>	<u>72.3</u>	395	72.2	4	391	73.1	390	73.2	<u>391</u>	<u>73.1</u>
436.cactusADM	4	906	52.8	905	52.8	<u>905</u>	<u>52.8</u>	4	<u>939</u>	<u>50.9</u>	939	50.9	938	50.9
437.leslie3d	4	1533	24.5	<u>1533</u>	<u>24.5</u>	1534	24.5	4	1505	25.0	<u>1509</u>	<u>24.9</u>	1512	24.9
444.namd	4	510	62.9	509	63.0	<u>509</u>	<u>63.0</u>	4	<u>505</u>	<u>63.5</u>	506	63.5	505	63.5
447.dealII	4	518	88.4	<u>515</u>	<u>88.9</u>	514	89.0	4	<u>491</u>	<u>93.2</u>	491	93.1	483	94.8
450.soplex	4	1217	27.4	<u>1219</u>	<u>27.4</u>	1224	27.3	4	<u>1130</u>	<u>29.5</u>	1125	29.6	1132	29.5
453.povray	4	221	96.4	<u>221</u>	<u>96.2</u>	221	96.2	4	195	109	<u>195</u>	<u>109</u>	195	109
454.calculix	4	<u>560</u>	<u>58.9</u>	555	59.5	566	58.3	4	554	59.5	563	58.6	<u>559</u>	<u>59.1</u>
459.GemsFDTD	4	2037	20.8	<u>2035</u>	<u>20.9</u>	2031	20.9	4	2029	20.9	2031	20.9	<u>2030</u>	<u>20.9</u>
465.tonto	4	<u>678</u>	<u>58.1</u>	654	60.2	697	56.5	4	653	60.3	687	57.3	<u>675</u>	<u>58.3</u>
470.lbm	4	2862	19.2	2861	19.2	<u>2861</u>	<u>19.2</u>	4	2290	24.0	<u>2288</u>	<u>24.0</u>	2288	24.0
481.wrf	4	<u>963</u>	<u>46.4</u>	956	46.7	963	46.4	4	964	46.4	<u>963</u>	<u>46.4</u>	957	46.7
482.sphinx3	4	<u>1920</u>	<u>40.6</u>	1921	40.6	1897	41.1	4	1786	43.6	<u>1783</u>	<u>43.7</u>	1778	43.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' was used to bind processes to CPUs
The R422 is built with two identical (half size) motherboards.
Only one of the two motherboards was powered on during the test run.
All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R422
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 46.3

SPECfp_rate_base2006 = 44.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Sep-2007
Hardware Availability: Aug-2007
Software Availability: Aug-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R422
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 46.3

SPECfp_rate_base2006 = 44.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Sep-2007
Hardware Availability: Aug-2007
Software Availability: Aug-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.0.026/bin/icc -L/opt/intel/cc/10.0.026/lib  
-I/opt/intel/cc/10.0.026/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.0.026/bin/icpc -L/opt/intel/cc/10.0.026/lib  
-I/opt/intel/cc/10.0.026/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.0.026/bin/ifort -L/opt/intel/fc/10.0.026/lib  
-I/opt/intel/fc/10.0.026/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-scalar-rep- -prefetch

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias
-auto_ilp32

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof_gen(pass 1) -prof_use(pass 2) -xT -ipo -O3
-no-prec-div

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R422
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 46.3

SPECfp_rate_base2006 = 44.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Sep-2007
Hardware Availability: Aug-2007
Software Availability: Aug-2007

Peak Optimization Flags (Continued)

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast

416.gamess: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof_gen(pass 1) -prof_use(pass 2) -fast

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

436.cactusADM: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-auto_ilp32

454.calculix: -fast -auto_ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:02:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2007.