



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3


Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

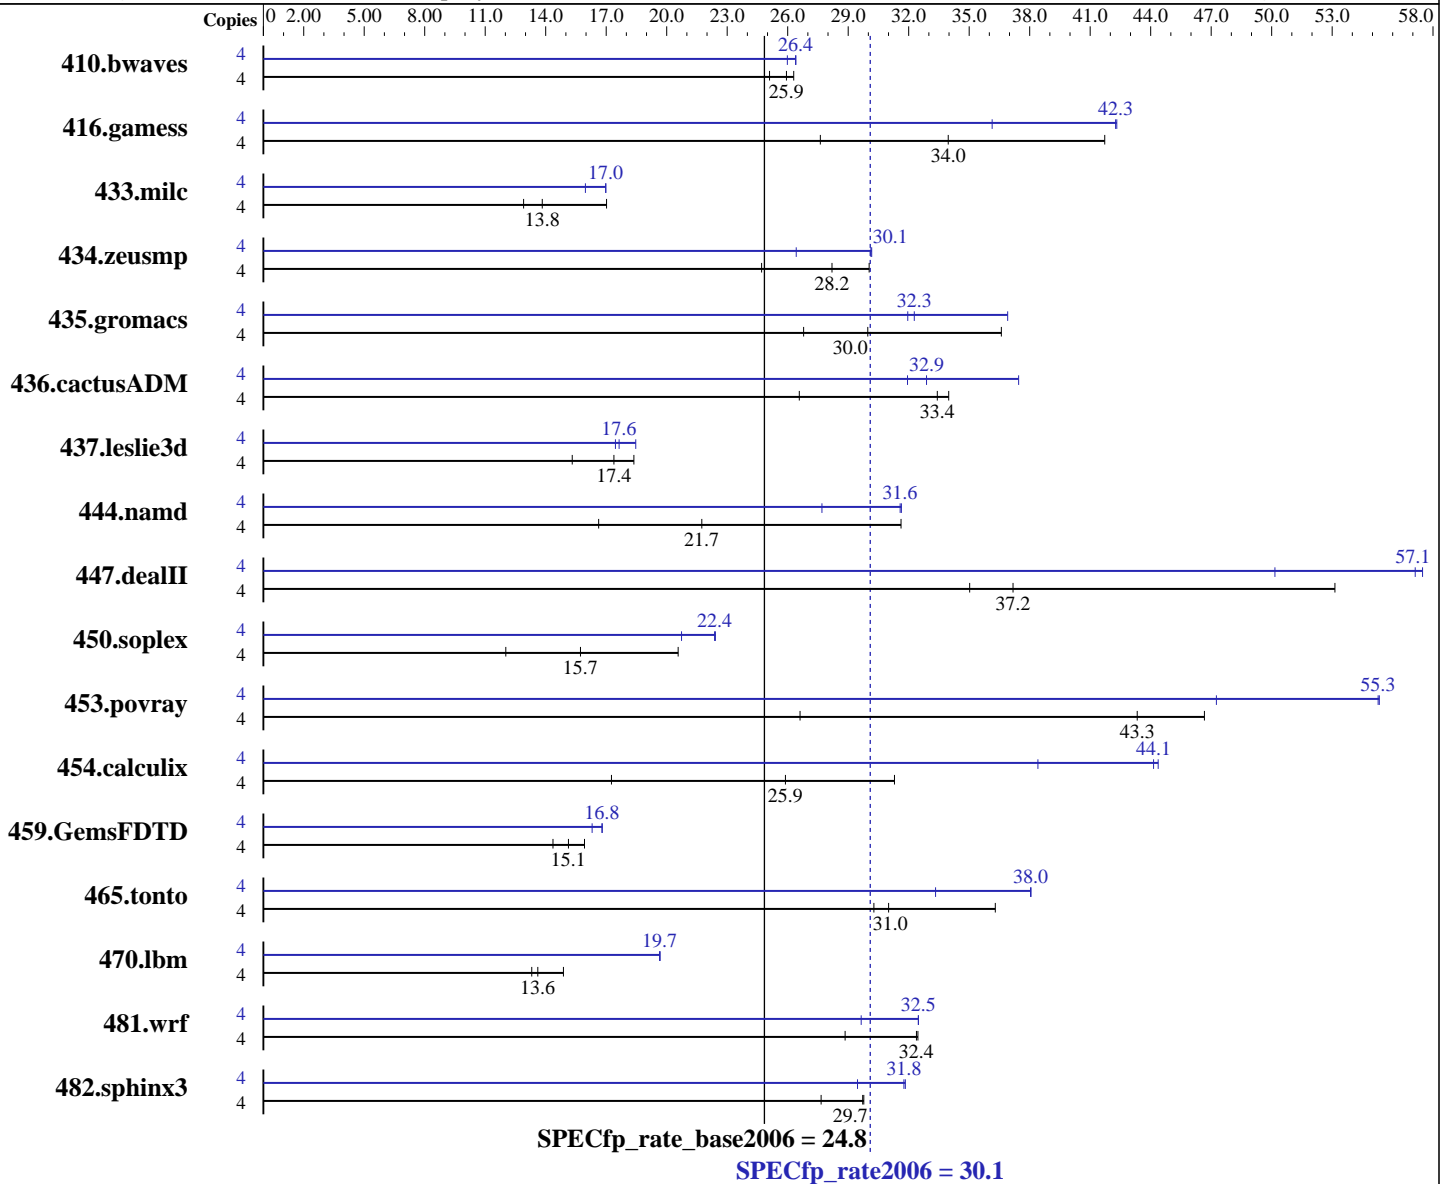

Hardware

CPU Name: Intel Xeon 5110
 CPU Characteristics: 1.6 GHz, 4 MB L2 shared, 1066 MHz system bus
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1
 kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32
 and Linux64 version 10.1, Build 20070725
 Auto Parallel: No
 File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2007
Hardware Availability: Jun-2006
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 10 K SAS
Other Hardware: None

Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2067	26.3	2166	25.1	<u>2096</u>	<u>25.9</u>	4	<u>2060</u>	<u>26.4</u>	2092	26.0	2059	26.4
416.gamess	4	2836	27.6	<u>2306</u>	<u>34.0</u>	1877	41.7	4	1851	42.3	2167	36.1	<u>1853</u>	<u>42.3</u>
433.milc	4	2846	12.9	<u>2655</u>	<u>13.8</u>	2158	17.0	4	<u>2163</u>	<u>17.0</u>	2300	16.0	2162	17.0
434.zeusmp	4	<u>1291</u>	<u>28.2</u>	1473	24.7	1212	30.0	4	<u>1208</u>	<u>30.1</u>	1378	26.4	1207	30.2
435.gromacs	4	1066	26.8	<u>953</u>	<u>30.0</u>	780	36.6	4	<u>885</u>	<u>32.3</u>	894	32.0	774	36.9
436.cactusADM	4	<u>1430</u>	<u>33.4</u>	1799	26.6	1406	34.0	4	1496	31.9	<u>1454</u>	<u>32.9</u>	1276	37.5
437.leslie3d	4	<u>2163</u>	<u>17.4</u>	2455	15.3	2046	18.4	4	2154	17.5	<u>2131</u>	<u>17.6</u>	2036	18.5
444.namd	4	<u>1476</u>	<u>21.7</u>	1929	16.6	1015	31.6	4	1158	27.7	1014	31.6	<u>1016</u>	<u>31.6</u>
447.dealII	4	<u>1231</u>	<u>37.2</u>	1307	35.0	861	53.1	4	912	50.2	796	57.5	<u>801</u>	<u>57.1</u>
450.soplex	4	<u>2122</u>	<u>15.7</u>	2775	12.0	1622	20.6	4	1609	20.7	<u>1491</u>	<u>22.4</u>	1488	22.4
453.povray	4	<u>491</u>	<u>43.3</u>	800	26.6	456	46.7	4	450	47.3	385	55.3	<u>385</u>	<u>55.3</u>
454.calculix	4	<u>1275</u>	<u>25.9</u>	1912	17.3	1054	31.3	4	859	38.4	744	44.4	<u>748</u>	<u>44.1</u>
459.GemsFDTD	4	<u>2806</u>	<u>15.1</u>	2955	14.4	2665	15.9	4	2603	16.3	2525	16.8	<u>2528</u>	<u>16.8</u>
465.tonto	4	1300	30.3	<u>1269</u>	<u>31.0</u>	1084	36.3	4	1181	33.3	1034	38.1	<u>1035</u>	<u>38.0</u>
470.lbm	4	4130	13.3	<u>4039</u>	<u>13.6</u>	3694	14.9	4	2794	19.7	2796	19.7	<u>2796</u>	<u>19.7</u>
481.wrf	4	1549	28.8	<u>1380</u>	<u>32.4</u>	1377	32.5	4	1507	29.6	1376	32.5	<u>1376</u>	<u>32.5</u>
482.sphinx3	4	2819	27.7	2618	29.8	<u>2623</u>	<u>29.7</u>	4	2646	29.5	2449	31.8	<u>2454</u>	<u>31.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2007
Hardware Availability: Jun-2006
Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 30.1

ProLiant DL380 G5
(1.6 GHz, Intel Xeon processor 5110)

SPECfp_rate_base2006 = 24.8

CPU2006 license: 3

Test date: Sep-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:11:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 October 2007.