



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2007

Hardware Availability: Aug-2006

Software Availability: Nov-2007

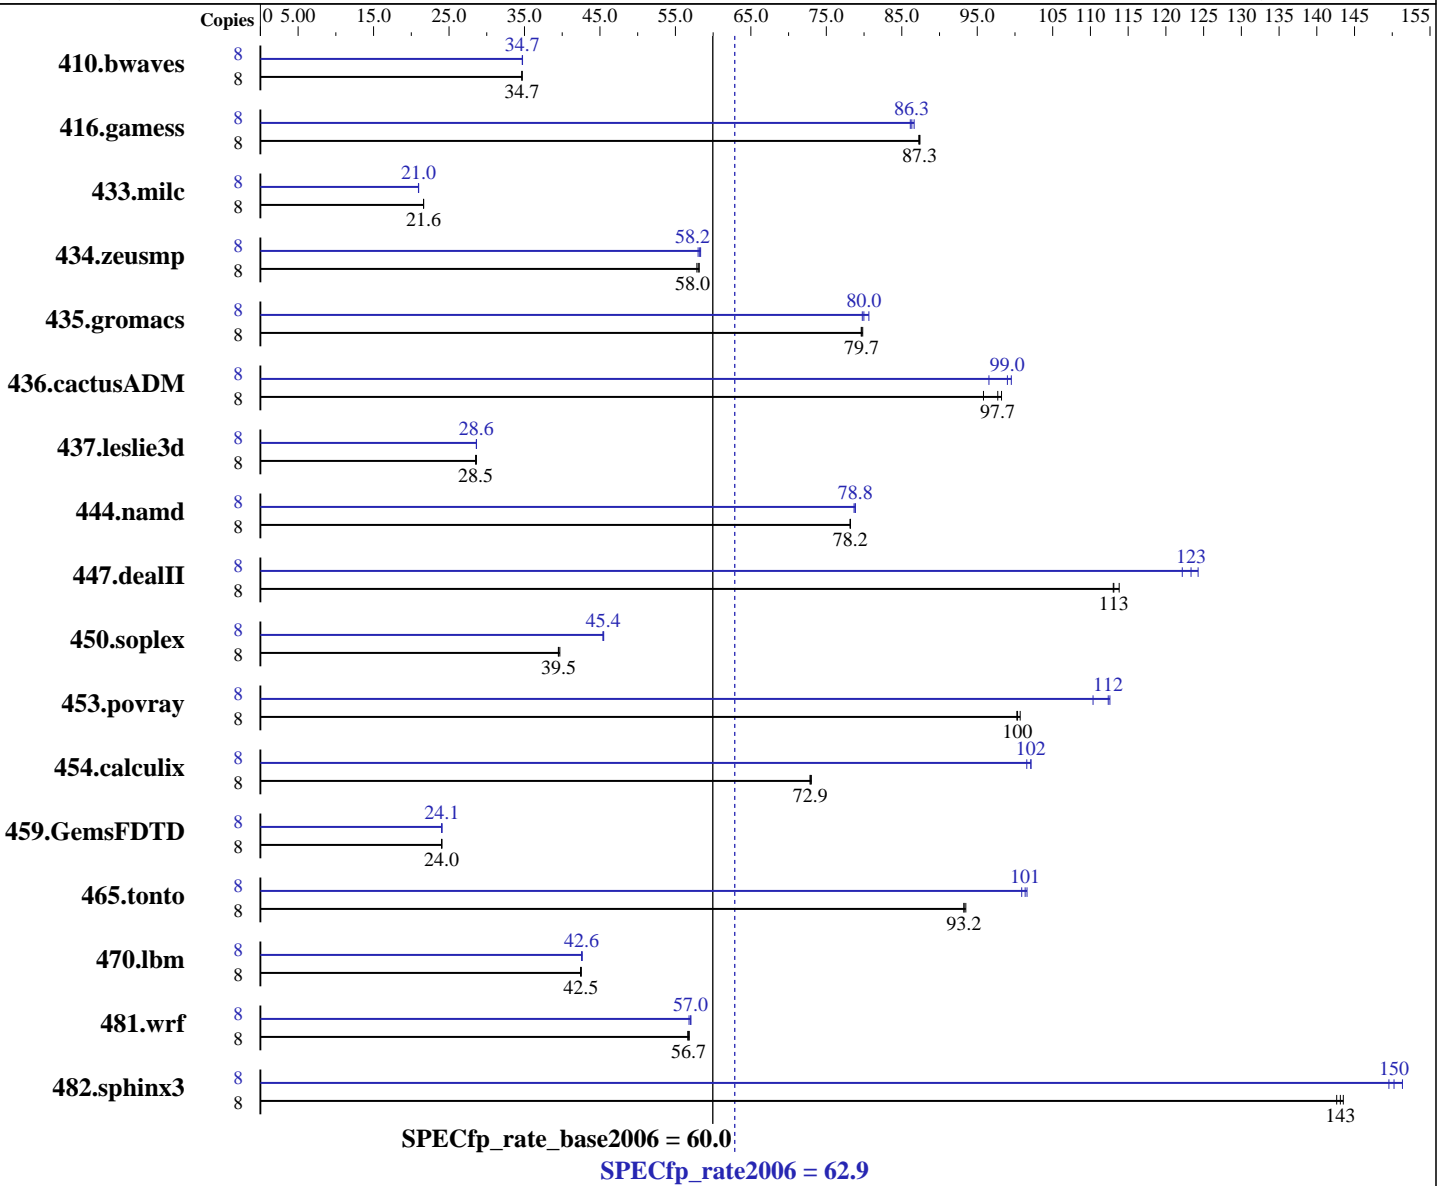

Hardware

CPU Name: Intel Xeon 7140M
 CPU Characteristics: 800 MHz system bus
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (16 x 1 GB ECC 400 MHz DDR2 SDRAM)
Disk Subsystem: 2 x 36 GB SCSI 15k RPM
Other Hardware: None

Other Software: SmartHeap library V8.1

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3138	34.6	3134	34.7	3136	34.7	8	3132	34.7	3131	34.7	3129	34.7		
416.gamess	8	1792	87.4	1793	87.3	1795	87.3	8	1819	86.1	1814	86.3	1808	86.6		
433.milc	8	3395	21.6	3396	21.6	3397	21.6	8	3503	21.0	3506	20.9	3502	21.0		
434.zeusmp	8	1252	58.2	1259	57.8	1255	58.0	8	1255	58.0	1251	58.2	1248	58.3		
435.gromacs	8	716	79.8	717	79.7	717	79.6	8	708	80.6	716	79.8	714	80.0		
436.cactusADM	8	998	95.8	973	98.2	978	97.7	8	961	99.5	990	96.5	966	99.0		
437.leslie3d	8	2626	28.6	2635	28.5	2635	28.5	8	2626	28.6	2627	28.6	2626	28.6		
444.namd	8	821	78.1	820	78.2	821	78.2	8	814	78.9	814	78.8	815	78.7		
447.dealII	8	804	114	809	113	810	113	8	736	124	742	123	749	122		
450.soplex	8	1681	39.7	1690	39.5	1688	39.5	8	1469	45.4	1466	45.5	1469	45.4		
453.povray	8	425	100	423	101	424	100	8	378	113	379	112	386	110		
454.calculix	8	906	72.8	906	72.9	904	73.0	8	646	102	650	102	646	102		
459.GemsFDTD	8	3534	24.0	3532	24.0	3531	24.0	8	3533	24.0	3529	24.1	3529	24.1		
465.tonto	8	842	93.5	844	93.2	844	93.2	8	777	101	775	102	780	101		
470.lbm	8	2585	42.5	2586	42.5	2591	42.4	8	2578	42.6	2581	42.6	2581	42.6		
481.wrf	8	1578	56.6	1575	56.7	1572	56.8	8	1567	57.0	1567	57.0	1573	56.8		
482.sphinx3	8	1093	143	1089	143	1086	144	8	1030	151	1043	150	1038	150		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

Platform Notes

BIOS Settings:
Logical Processor = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xP -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xP -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xP -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xP -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55

Test date: Oct-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2006

Tested by: Dell Inc.

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll2 -scalar-rep- -prefetch
-opt-malloc-options=3

482.sphinx3: -xP -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xP -ipo -O3 -no-prec-div -static -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xP -ipo -O3
-no-prec-div -static -unroll2 -prefetch -auto-ilp32

454.calculix: -xP -ipo -O3 -no-prec-div -static -unroll-aggressive
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 62.9

PowerEdge 6800 (Intel Xeon 7140M, 3.40 GHz)

SPECfp_rate_base2006 = 60.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2007

Hardware Availability: Aug-2006

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

481.wrf: -xP -ipo -O3 -no-prec-div -static -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.25.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.25.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:09:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 November 2007.