



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2007

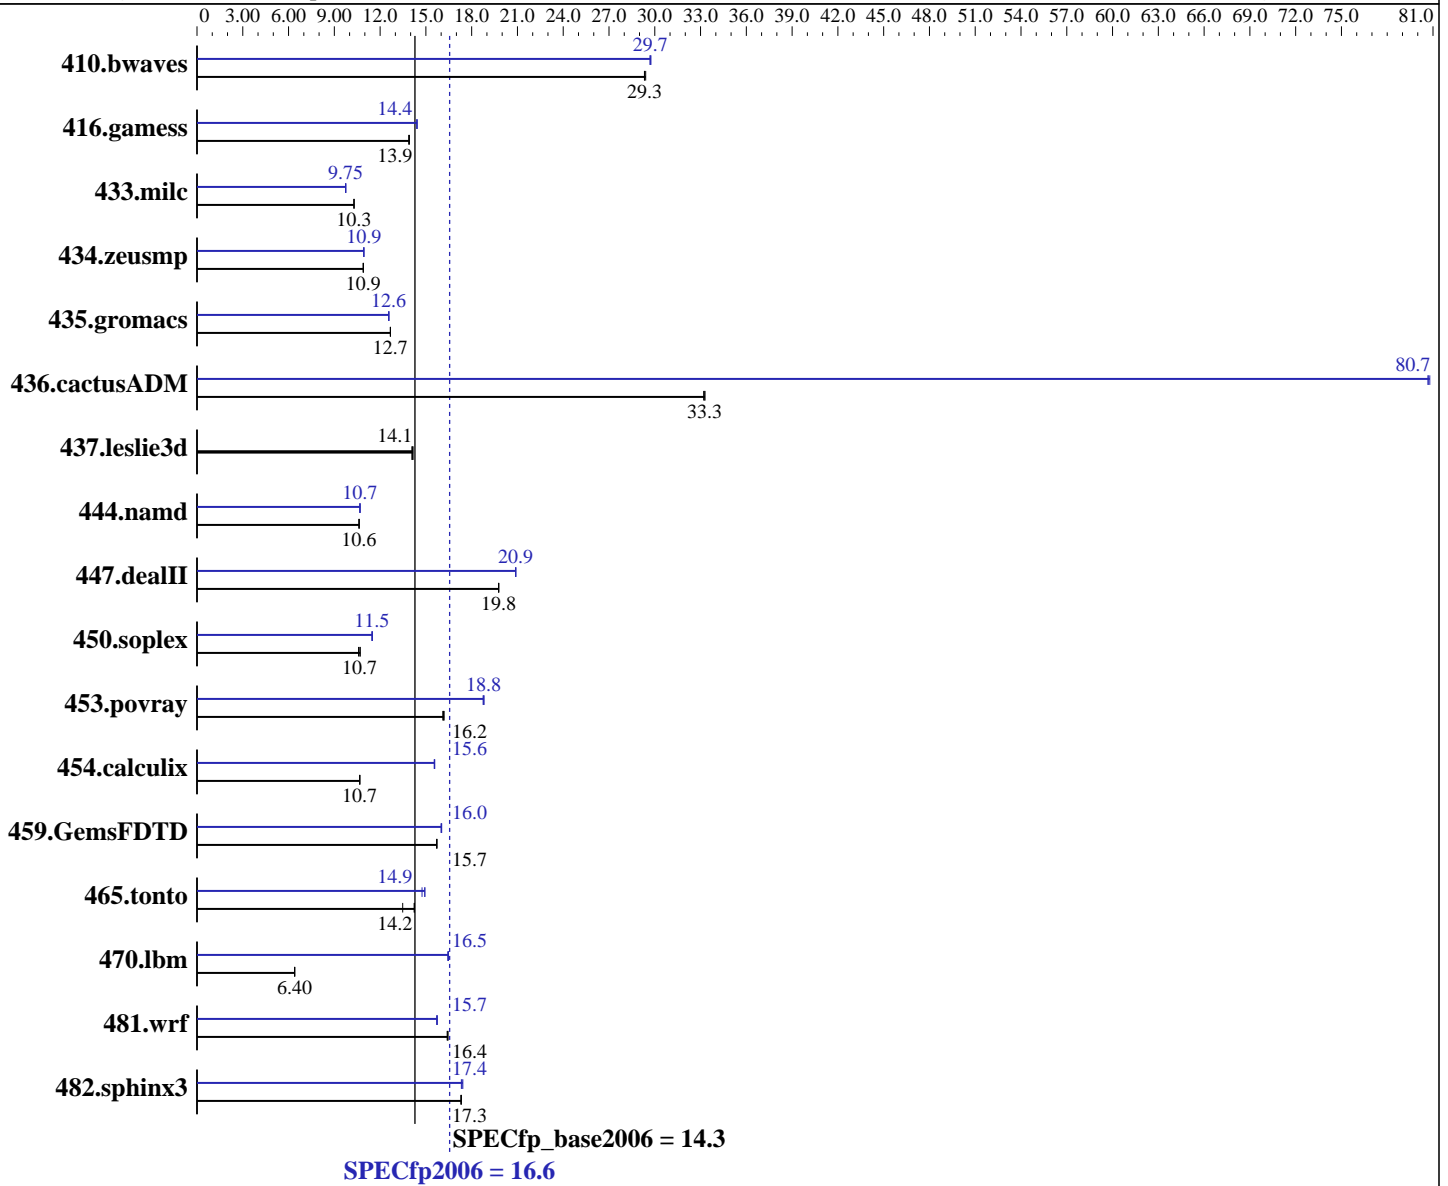

Hardware

CPU Name: Intel Xeon E5335
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ and Fortran Compiler for Linux version 10.1
 Build 20070824
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Feb-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	463	29.3	463	29.3	462	29.4	457	29.7	458	29.7	457	29.7
416.gamess	1409	13.9	1411	13.9	1407	13.9	1358	14.4	1357	14.4	1360	14.4
433.milc	892	10.3	893	10.3	892	10.3	943	9.74	941	9.75	942	9.75
434.zeusmp	835	10.9	835	10.9	835	10.9	832	10.9	832	10.9	832	10.9
435.gromacs	563	12.7	563	12.7	563	12.7	568	12.6	568	12.6	569	12.6
436.cactusADM	359	33.3	359	33.3	360	33.2	148	80.7	148	80.7	148	80.8
437.leslie3d	664	14.2	668	14.1	666	14.1	664	14.2	668	14.1	666	14.1
444.namd	754	10.6	755	10.6	756	10.6	750	10.7	752	10.7	751	10.7
447.dealII	579	19.8	579	19.8	579	19.8	548	20.9	548	20.9	548	20.9
450.soplex	779	10.7	782	10.7	788	10.6	727	11.5	725	11.5	727	11.5
453.povray	328	16.2	330	16.1	329	16.2	283	18.8	284	18.7	283	18.8
454.calculix	774	10.7	773	10.7	773	10.7	530	15.6	530	15.6	531	15.5
459.GemsFDTD	675	15.7	676	15.7	675	15.7	662	16.0	662	16.0	663	16.0
465.tonto	730	13.5	691	14.2	691	14.2	659	14.9	659	14.9	667	14.7
470.lbm	2144	6.41	2149	6.39	2146	6.40	836	16.4	834	16.5	834	16.5
481.wrf	681	16.4	680	16.4	679	16.5	711	15.7	710	15.7	710	15.7
482.sphinx3	1126	17.3	1125	17.3	1127	17.3	1122	17.4	1119	17.4	1125	17.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

C benchmarks (except as noted below) (continued):

-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/bin/icpc

-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/lib

-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 16.6

IBM BladeCenter HS21 XM (Intel Xeon E5335)

SPECfp_base2006 = 14.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2007
Hardware Availability: Feb-2007
Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:45:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.