



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5130)

SPECfp[®]2006 = 13.5

SPECfp_base2006 = 13.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

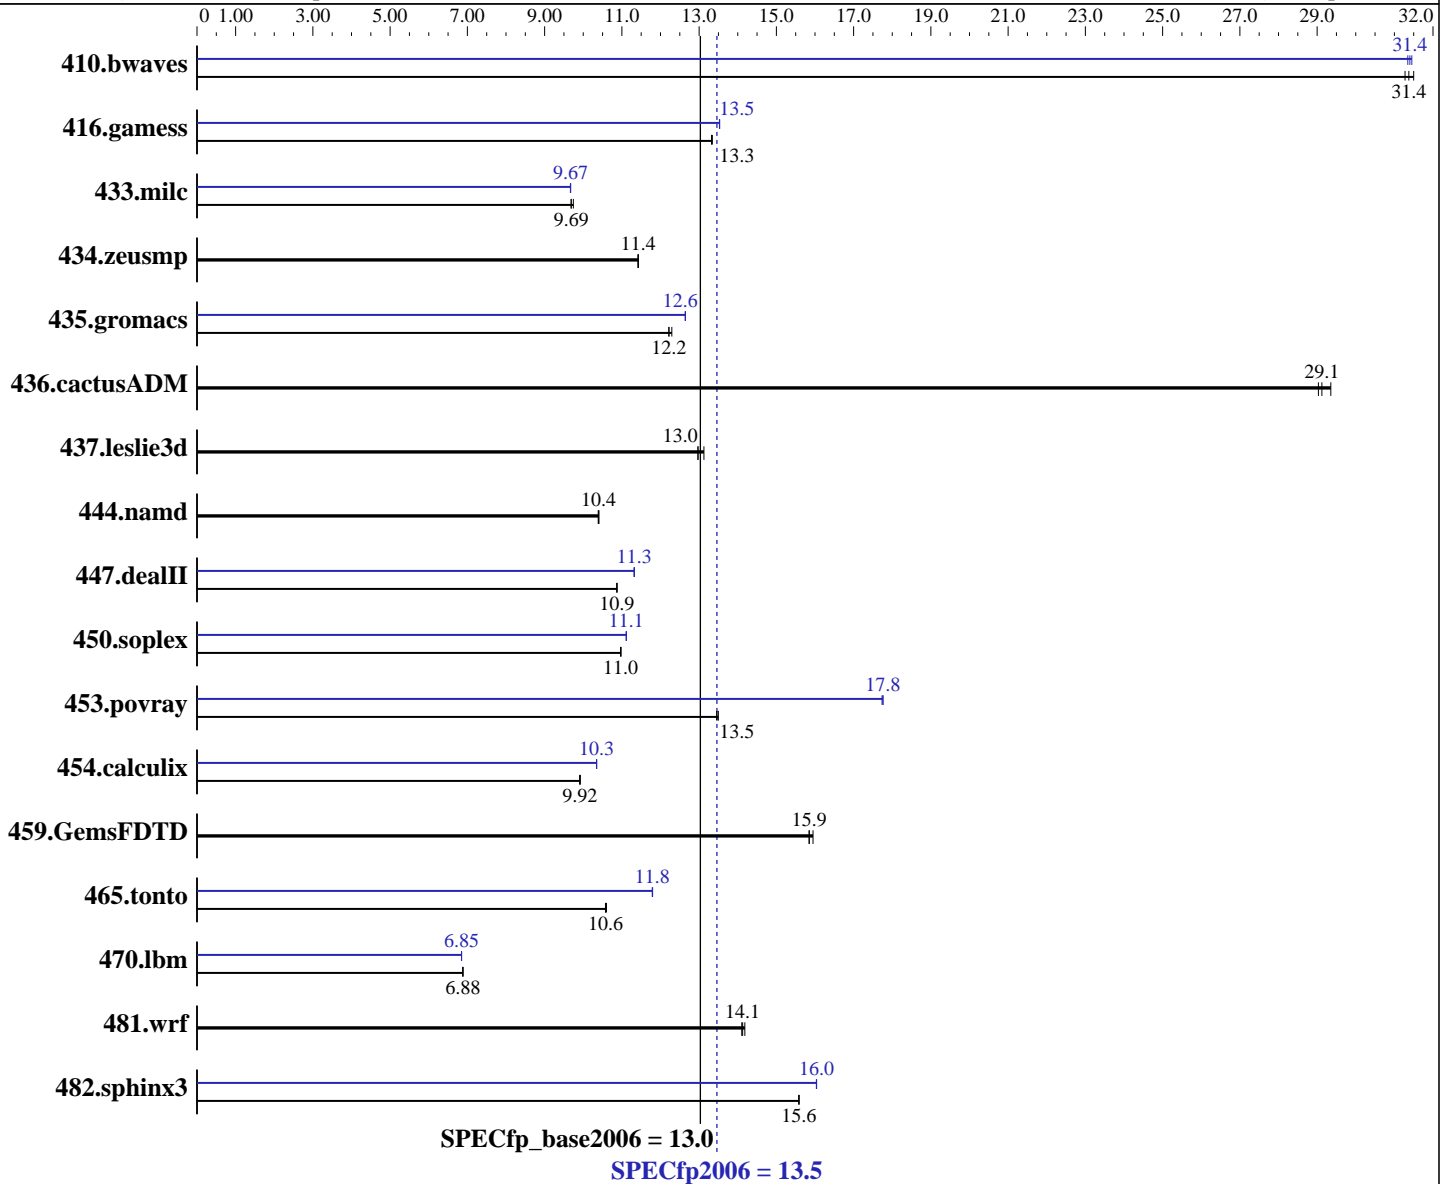

Hardware

CPU Name: Intel Xeon 5130
 CPU Characteristics: 2.00 GHz, 4 MB L2, 1333 MHz bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: Windows Server 2003, Standard x64 Edition Service Pack1
 Compiler: Intel C++ Compiler for EM64T version 9.1 Build 20070322, Package-ID W_CC_C_9.1.037
 Intel Fortran Compiler for EM64T version 9.1 Build 20070322, Package-ID W_FC_C_9.1.037
 Microsoft Visual Studio 2005 (libr. & linker)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5130)

SPECfp2006 = 13.5

SPECfp_base2006 = 13.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	431	31.5	433	31.4	435	31.3	433	31.4	434	31.3	432	31.5
416.gamess	1468	13.3	1469	13.3	1470	13.3	1447	13.5	1447	13.5	1448	13.5
433.milc	942	9.74	948	9.69	947	9.69	950	9.67	949	9.67	949	9.67
434.zeusmp	796	11.4	797	11.4	797	11.4	796	11.4	797	11.4	797	11.4
435.gromacs	581	12.3	584	12.2	585	12.2	565	12.6	565	12.6	565	12.6
436.cactusADM	407	29.4	412	29.0	410	29.1	407	29.4	412	29.0	410	29.1
437.leslie3d	716	13.1	725	13.0	725	13.0	716	13.1	725	13.0	725	13.0
444.namd	772	10.4	771	10.4	771	10.4	772	10.4	771	10.4	771	10.4
447.dealII	1053	10.9	1052	10.9	1052	10.9	1011	11.3	1011	11.3	1010	11.3
450.soplex	760	11.0	760	11.0	760	11.0	750	11.1	750	11.1	750	11.1
453.povray	395	13.5	394	13.5	394	13.5	300	17.8	300	17.8	300	17.7
454.calculix	833	9.91	832	9.92	832	9.92	797	10.3	797	10.3	798	10.3
459.GemsFDTD	665	15.9	669	15.9	670	15.8	665	15.9	669	15.9	670	15.8
465.tonto	928	10.6	930	10.6	930	10.6	834	11.8	835	11.8	835	11.8
470.lbm	1996	6.88	1996	6.88	1996	6.88	2006	6.85	2006	6.85	2006	6.85
481.wrf	788	14.2	791	14.1	792	14.1	788	14.2	791	14.1	792	14.1
482.sphinx3	1250	15.6	1251	15.6	1251	15.6	1215	16.0	1215	16.0	1215	16.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

The Express5800/120Rg-1(Intel Xeon Processor 5130) and the Express5800/120Ri-2(Intel Xeon Processor 5130) models are electronically equivalent. The results have been measured on a Express5800/120Ri-2(Intel Xeon Processor 5130) model.

Base Compiler Invocation

C benchmarks:
icl -Qvc8 -Qc99

C++ benchmarks:
icl -Qvc8

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5130)

SPECfp2006 = 13.5

SPECfp_base2006 = 13.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc8 -Qc99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -D_Complex= -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -D_Complex= -DSPEC_CPU_P64
436.cactusADM: -D_Complex= -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -D_Complex= -DSPEC_CPU_P64 -DBOOST_NO_INTRINSIC_WCHAR_T
-DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -D_Complex= -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER
-Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -D_Complex= -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -D_Complex= -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-fast -Qparallel -F950000000 -link -FORCE:MULTIPLE

C++ benchmarks:
-fast -Qparallel -Qcxx-features -F950000000
-link -FORCE:MULTIPLE

Fortran benchmarks:
-fast -Qparallel -F950000000 -link -FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-fast -Qparallel -F950000000 -link -FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5130)

SPECfp2006 = 13.5

SPECfp_base2006 = 13.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Compiler Invocation

C benchmarks:
 icl -Qvc8 -Qc99

C++ benchmarks:
 icl -Qvc8

Fortran benchmarks:
 ifort

Benchmarks using both Fortran and C:
 icl -Qvc8 -Qc99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
 -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F950000000
 -link -FORCE:MULTIPLE

C++ benchmarks:

 444.namd: basepeak = yes

 447.dealII: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
 -F950000000 -link -FORCE:MULTIPLE

 450.soplex: Same as 447.dealII

 453.povray: Same as 447.dealII

Fortran benchmarks:

 410.bwaves: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qparallel
 -F950000000 -link -FORCE:MULTIPLE

 416.gamess: -fast -F950000000 -link -FORCE:MULTIPLE

 434.zeusmp: basepeak = yes

 437.leslie3d: basepeak = yes

 459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5130)

SPECfp2006 = 13.5

SPECfp_base2006 = 13.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Optimization Flags (Continued)

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F950000000
-link -FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-win-flags.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-win-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:28:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.