



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 133

IBM BladeCenter HS21 (Intel Xeon X5460)

SPECint_rate_base2006 = 108

CPU2006 license: 11


Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

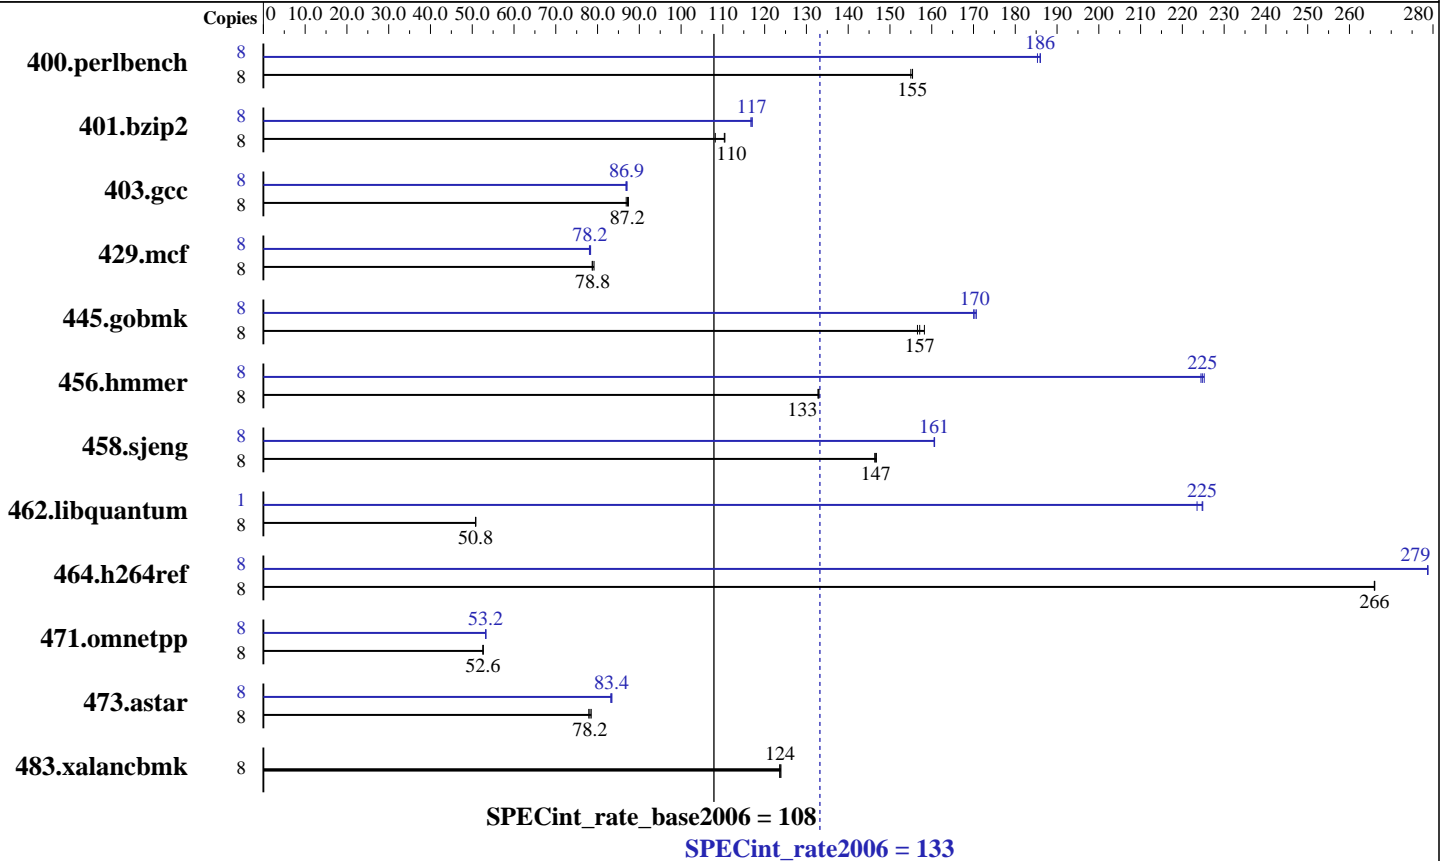

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3158
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
 Other Hardware: Memory and I/O Expansion Unit (P/N 42C1600)

Software

Operating System: SLES10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler 10.1 for Linux
 Build 20070913 Package ID: 1_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1
 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 133

IBM BladeCenter HS21 (Intel Xeon X5460)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	504	155	<u>503</u>	<u>155</u>	503	155	8	<u>420</u>	<u>186</u>	420	186	422	185
401.bzip2	8	<u>700</u>	<u>110</u>	699	110	714	108	8	<u>660</u>	<u>117</u>	660	117	662	117
403.gcc	8	741	86.9	737	87.4	<u>739</u>	<u>87.2</u>	8	740	87.1	742	86.8	<u>741</u>	<u>86.9</u>
429.mcf	8	922	79.2	<u>926</u>	<u>78.8</u>	927	78.7	8	<u>933</u>	<u>78.2</u>	931	78.3	935	78.1
445.gobmk	8	536	157	530	158	<u>534</u>	<u>157</u>	8	494	170	<u>493</u>	<u>170</u>	492	171
456.hammer	8	562	133	<u>562</u>	<u>133</u>	561	133	8	333	224	<u>332</u>	<u>225</u>	331	225
458.sjeng	8	660	147	<u>660</u>	<u>147</u>	661	146	8	602	161	603	161	<u>603</u>	<u>161</u>
462.libquantum	8	<u>3261</u>	<u>50.8</u>	3264	50.8	3261	50.8	1	92.7	224	92.1	225	<u>92.2</u>	<u>225</u>
464.h264ref	8	666	266	665	266	<u>666</u>	<u>266</u>	8	635	279	635	279	<u>635</u>	<u>279</u>
471.omnetpp	8	951	52.6	950	52.6	<u>951</u>	<u>52.6</u>	8	<u>939</u>	<u>53.2</u>	939	53.2	939	53.2
473.astar	8	<u>718</u>	<u>78.2</u>	716	78.5	721	77.9	8	675	83.2	<u>674</u>	<u>83.4</u>	673	83.4
483.xalancbmk	8	<u>446</u>	<u>124</u>	447	124	446	124	8	<u>446</u>	<u>124</u>	447	124	446	124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 133

IBM BladeCenter HS21 (Intel Xeon X5460)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast -inline-alloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 133

IBM BladeCenter HS21 (Intel Xeon X5460)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.32.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 133

IBM BladeCenter HS21 (Intel Xeon X5460)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.32.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:47:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2007.