



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 24.3

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint_base2006 = 21.1

CPU2006 license: 3


Test date: Feb-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

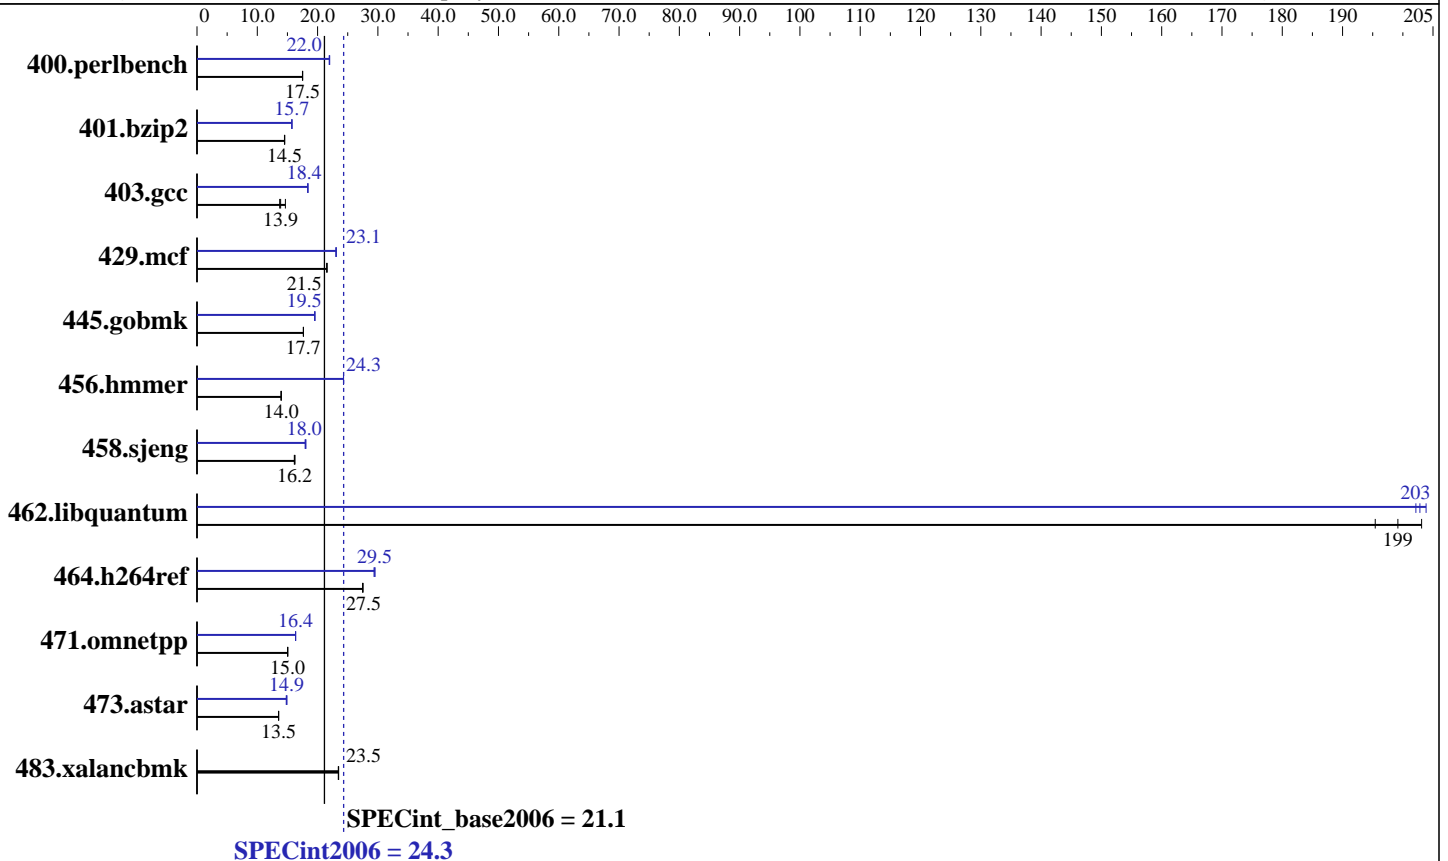

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics: 2.66 GHz, 2x6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F CL5)
 Disk Subsystem: 1x72 GB 15 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 binutils-2.17.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 24.3

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint_base2006 = 21.1

CPU2006 license: 3

Test date: Feb-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	558	17.5	559	17.5	557	17.5	446	21.9	444	22.0	444	22.0
401.bzip2	665	14.5	663	14.6	665	14.5	613	15.7	613	15.8	614	15.7
403.gcc	549	14.7	580	13.9	587	13.7	438	18.4	438	18.4	438	18.4
429.mcf	424	21.5	423	21.6	423	21.5	395	23.1	395	23.1	396	23.0
445.gobmk	594	17.7	594	17.7	595	17.6	537	19.5	537	19.5	536	19.6
456.hammer	668	14.0	669	13.9	667	14.0	384	24.3	384	24.3	384	24.3
458.sjeng	746	16.2	746	16.2	750	16.1	673	18.0	670	18.1	675	17.9
462.libquantum	106	195	104	199	102	203	102	203	102	204	102	202
464.h264ref	804	27.5	805	27.5	805	27.5	754	29.4	751	29.5	750	29.5
471.omnetpp	415	15.0	415	15.0	416	15.0	382	16.4	382	16.4	383	16.3
473.astar	518	13.6	519	13.5	519	13.5	471	14.9	474	14.8	471	14.9
483.xalancbmk	294	23.5	294	23.5	294	23.4	294	23.5	294	23.5	294	23.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 24.3

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint_base2006 = 21.1

CPU2006 license: 3

Test date: Feb-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 24.3

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint_base2006 = 21.1

CPU2006 license: 3

Test date: Feb-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmcr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 24.3

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint_base2006 = 21.1

CPU2006 license: 3

Test date: Feb-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:21:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2008.