



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55


Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

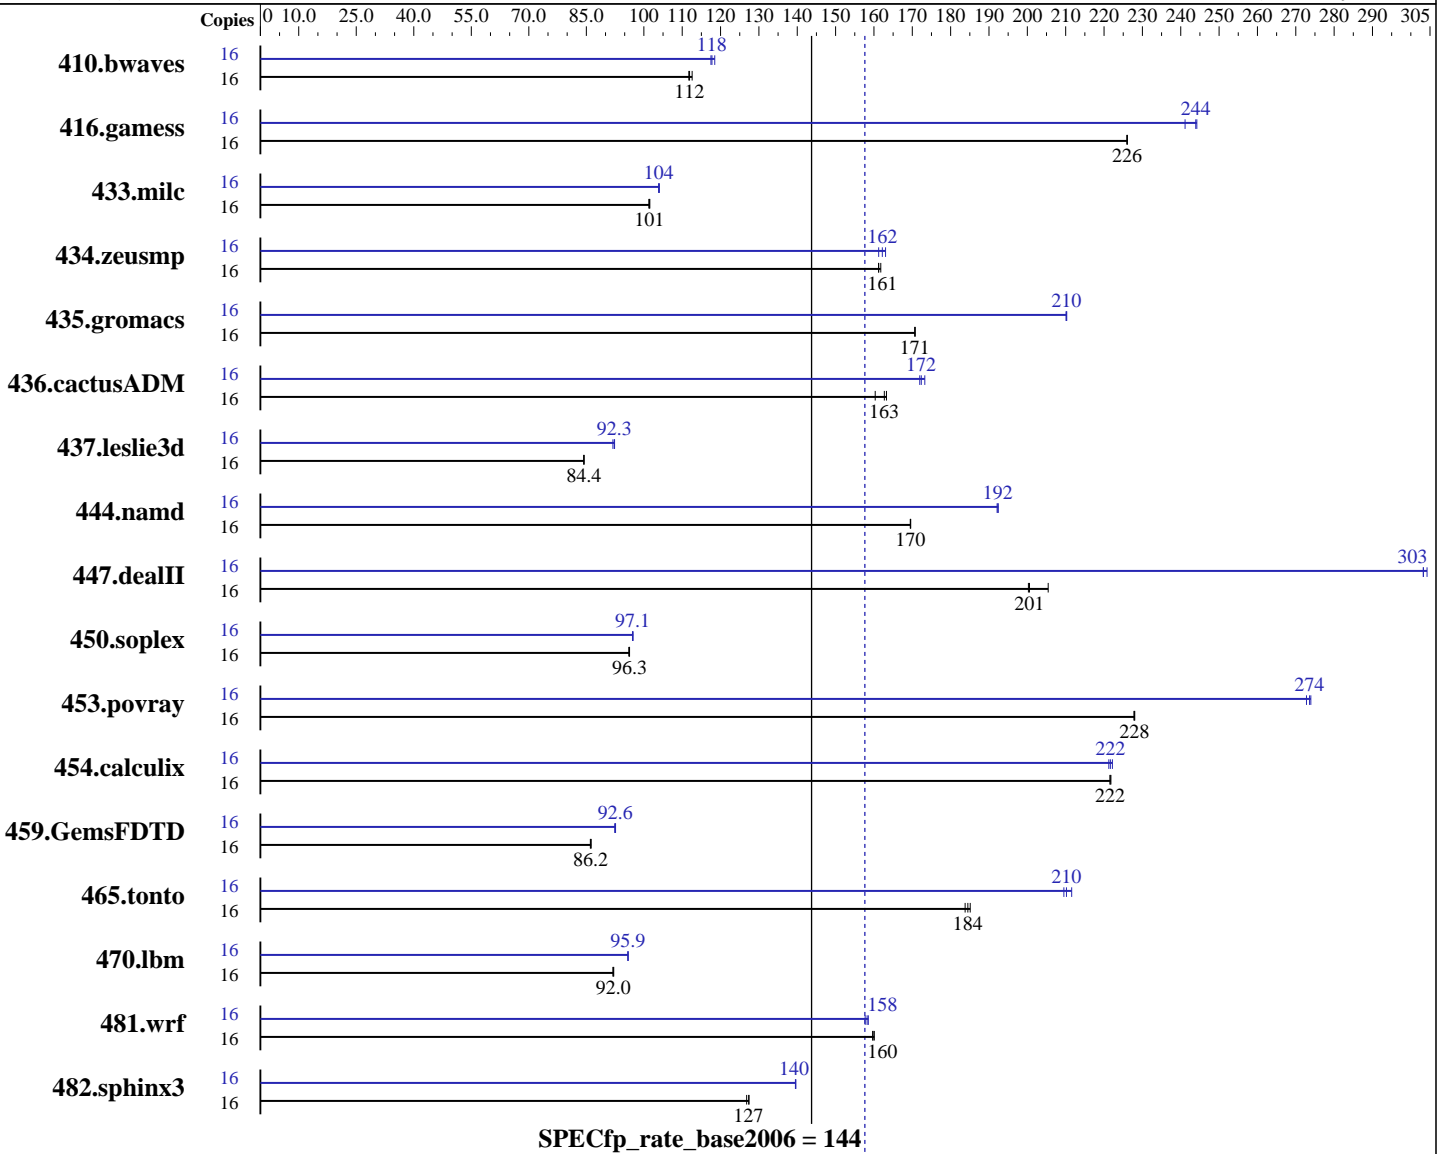

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: 2x73 SAS, 10000 RPM
Other Hardware: None

Other Software: --

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1946	112	1931	113	<u>1943</u>	<u>112</u>	16	<u>1846</u>	<u>118</u>	1851	117	1835	118		
416.gamess	16	<u>1386</u>	<u>226</u>	1386	226	1386	226	16	1283	244	1299	241	<u>1284</u>	<u>244</u>		
433.milc	16	1446	102	1450	101	<u>1447</u>	<u>101</u>	16	<u>1413</u>	<u>104</u>	1412	104	1414	104		
434.zeusmp	16	903	161	<u>903</u>	<u>161</u>	900	162	16	903	161	893	163	<u>898</u>	<u>162</u>		
435.gromacs	16	<u>669</u>	<u>171</u>	669	171	669	171	16	544	210	<u>543</u>	<u>210</u>	543	210		
436.cactusADM	16	<u>1175</u>	<u>163</u>	1171	163	1193	160	16	1112	172	<u>1109</u>	<u>172</u>	1104	173		
437.leslie3d	16	1783	84.3	<u>1783</u>	<u>84.4</u>	1782	84.4	16	1628	92.4	<u>1630</u>	<u>92.3</u>	1636	91.9		
444.namd	16	<u>757</u>	<u>170</u>	757	170	757	169	16	667	192	668	192	<u>667</u>	<u>192</u>		
447.dealII	16	914	200	891	205	<u>913</u>	<u>201</u>	16	602	304	<u>604</u>	<u>303</u>	604	303		
450.soplex	16	1389	96.1	<u>1386</u>	<u>96.3</u>	1386	96.3	16	1375	97.0	<u>1375</u>	<u>97.1</u>	1373	97.2		
453.povray	16	373	228	<u>373</u>	<u>228</u>	374	228	16	<u>311</u>	<u>274</u>	311	274	312	273		
454.calculix	16	595	222	<u>596</u>	<u>222</u>	596	222	16	<u>596</u>	<u>222</u>	597	221	594	222		
459.GemsFDTD	16	1973	86.0	<u>1970</u>	<u>86.2</u>	1968	86.2	16	1833	92.6	<u>1834</u>	<u>92.6</u>	1837	92.4		
465.tonto	16	851	185	857	184	<u>853</u>	<u>184</u>	16	744	212	<u>749</u>	<u>210</u>	751	210		
470.lbm	16	2386	92.1	<u>2389</u>	<u>92.0</u>	2391	91.9	16	2294	95.8	2292	95.9	<u>2294</u>	<u>95.9</u>		
481.wrf	16	1119	160	1116	160	<u>1119</u>	<u>160</u>	16	1133	158	1127	159	<u>1130</u>	<u>158</u>		
482.sphinx3	16	2459	127	<u>2449</u>	<u>127</u>	2447	127	16	2235	140	2233	140	<u>2234</u>	<u>140</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200' was used to set environment locked pages in memory quantity
Environment variable PGI_HUGE_PAGES set to 150
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
numactl used to bind copies to the cores
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Portability Flags (Continued)

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
 -Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
 -Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -m3dnow

482.sphinx3: -march=barcelona -Ofast

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
 -Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
 -Munroll=m:8 -tp barcelona-64 -Bstatic_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -OPT:malloc_alg=1 -m32 -fno-exceptions

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
 -LNO:prefetch=1

453.povray: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

Fortran benchmarks:

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
 -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

410.bwaves: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 158

PowerEdge R905 (AMD Opteron 8356, 2.30 GHz)

SPECfp_rate_base2006 = 144

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Other Flags (Continued)

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.00.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:08:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 May 2008.