



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®2006 = 15.0

ProLiant DL185 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.3

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

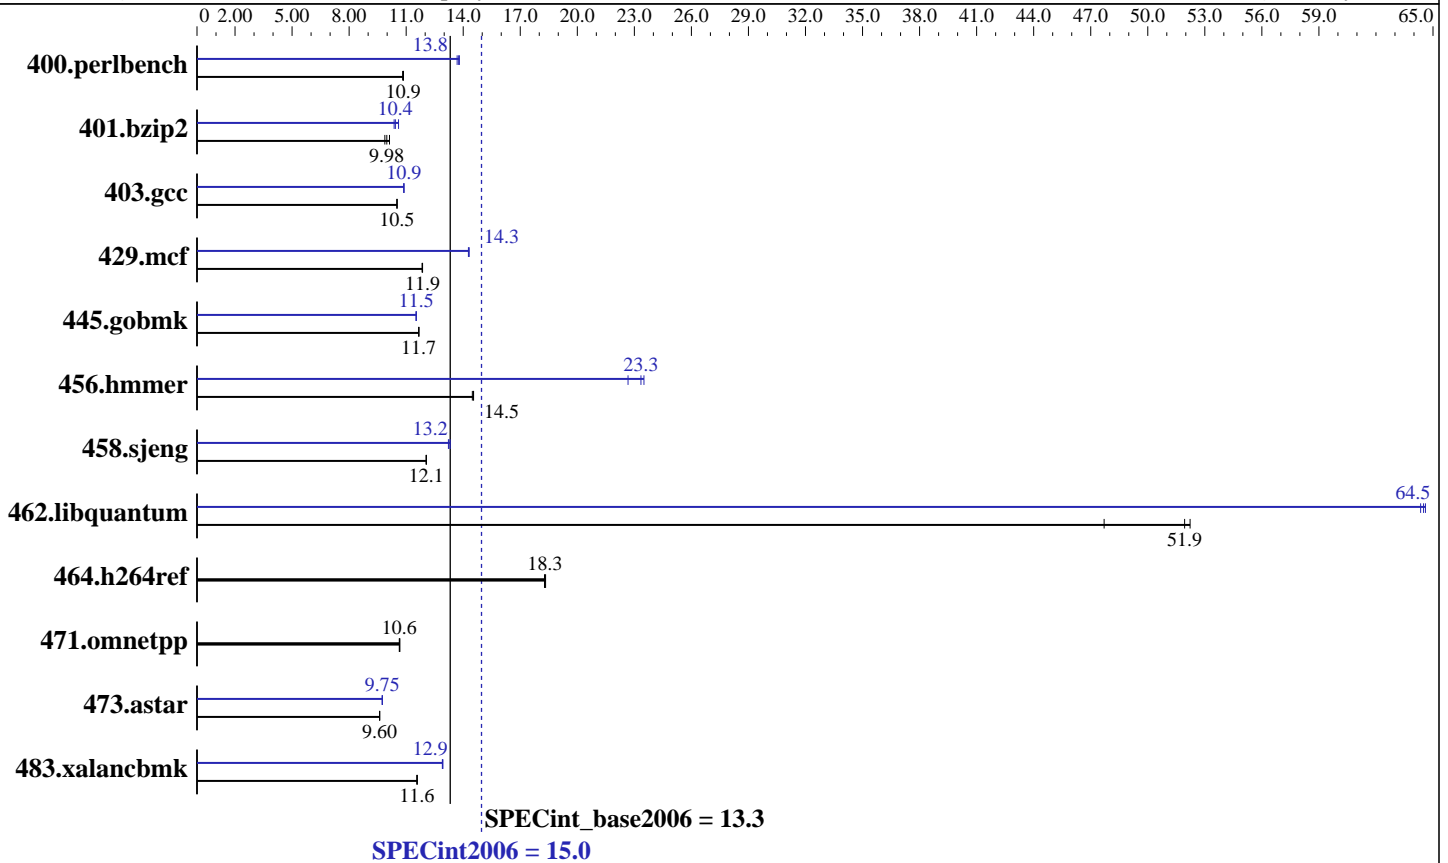

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, PC2-5300P CL5)
 Disk Subsystem: 1x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils-2.18.50, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL185 G5
(2.3 GHz AMD Opteron 2356)

SPECint2006 = **15.0**

SPECint_base2006 = **13.3**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	900	10.9	904	10.8	900	10.9	714	13.7	708	13.8	710	13.8
401.bzip2	967	9.98	977	9.88	953	10.1	925	10.4	910	10.6	931	10.4
403.gcc	765	10.5	765	10.5	766	10.5	740	10.9	740	10.9	740	10.9
429.mcf	769	11.9	769	11.9	771	11.8	639	14.3	637	14.3	638	14.3
445.gobmk	899	11.7	899	11.7	899	11.7	910	11.5	910	11.5	910	11.5
456.hammer	641	14.5	642	14.5	644	14.5	400	23.3	412	22.7	397	23.5
458.sjeng	1004	12.0	1003	12.1	1003	12.1	915	13.2	913	13.2	908	13.3
462.libquantum	434	47.7	397	52.2	399	51.9	322	64.3	321	64.5	321	64.6
464.h264ref	1207	18.3	1211	18.3	1209	18.3	1207	18.3	1211	18.3	1209	18.3
471.omnetpp	587	10.6	587	10.6	586	10.7	587	10.6	587	10.6	586	10.7
473.astar	730	9.61	731	9.60	731	9.60	721	9.74	720	9.75	720	9.75
483.xalancbmk	596	11.6	596	11.6	597	11.6	535	12.9	534	12.9	534	12.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
 Max locked memory set to 2097152
 PGI_HUGE_PAGES set to 896.
 Total number of huge pages available is 7168.
 NCPUS set to number of cores
 numactl used to bind processes to CPUs

Platform Notes

BIOS configuration:
 Power Regulator set to Static High Performance Mode

Base Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 15.0

ProLiant DL185 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
-Mconcur=innermost -Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-fastsse -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32
-Msmartalloc=huge:896 --zc_eh -tp barcelona -Bstatic_pgi

```

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 15.0

ProLiant DL185 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:8(pass 2)
 -Mipa=inline(pass 2) -fast -O4 -Mfprelaxed
 -Msmartalloc=huge:896 -Mnounroll -Mnovect -tp barcelona-64
 -Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mconcur=innermost(pass 2) -Mpfo(pass 2)
 -fast -O4 -Msmartalloc=huge:896 -Mnounroll
 -tp barcelona-64 -Bstatic_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)
 -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Mfprelaxed
 -Msmartalloc=huge:896 -tp barcelona -Bstatic_pgi

429.mcf: -fastsse -Mconcur -Mipa=jobs:8 -Mipa=fast -Mipa=inline:1
 -Msmartalloc=huge:896 -Mloop32 -tp barcelona -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)
 -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2) -fast -O4
 -Msmartalloc=huge:896 -Mfprelaxed -Mnovect
 -tp barcelona-64 -Bstatic_pgi

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:896 -Mfprelaxed
 -Mvect=partial -Msafeptr -Mipa=jobs:8 -Mipa=const
 -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mconcur(pass 2)
 -Mpfo(pass 2) -fastsse -Msmartalloc=huge:896 -Mfprelaxed
 -tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc -Mvect=nosse
 -Munroll=m:8 -Mconcur=innermost -Mconcur=noaltcode
 -Mipa=jobs:8 -Mipa=fast -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 15.0

ProLiant DL185 G5
(2.3 GHz AMD Opteron 2356)

SPECint_base2006 = 13.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -O4
-Msmartalloc=huge:896 -Mfprelaxed -Mloop32 --zc_eh
-tp barcelona -Bstatic_pgi

483.xalancbmk: -fastsse -O4 -Mipa=jobs:8 -Mipa=fast -Mipa=inline
-Mfprelaxed -Msmartalloc -Mloop32 --zc_eh -tp barcelona
-Bstatic_pgi
-L/proj/qa/smartheap/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:53:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 April 2008.