



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint®2006 = 14.8**

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

**SPECint\_base2006 = 13.2**

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

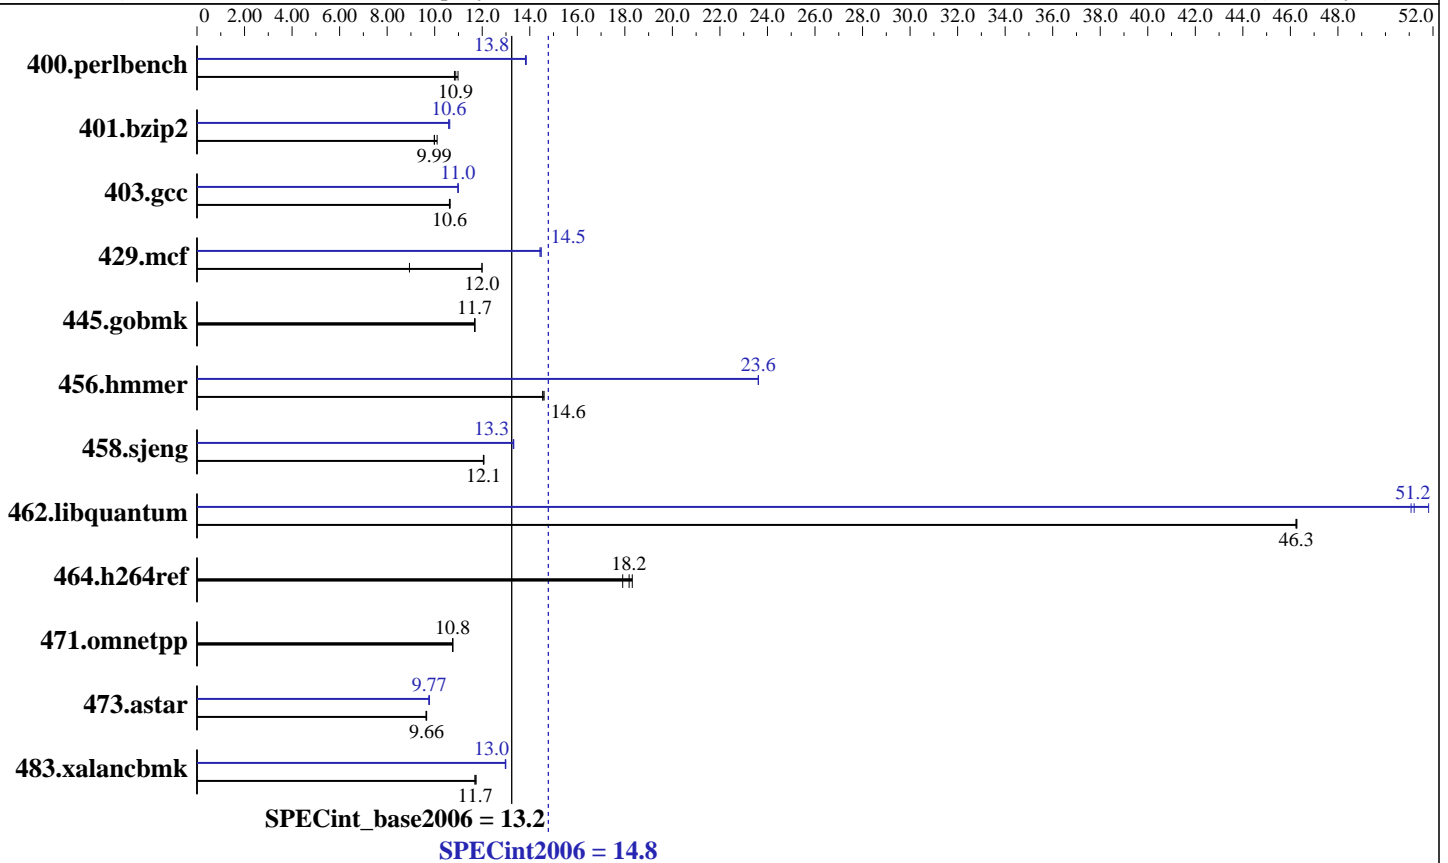

### Hardware

CPU Name: AMD Opteron 2356  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, PC2-5300P CL5)  
 Disk Subsystem: 2x72 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux binutils-2.18.50



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECint2006 = 14.8

SPECint\_base2006 = 13.2

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

## Results Table

| Benchmark      | Base        |             |            |             |             |             | Peak       |             |            |             |             |             |
|----------------|-------------|-------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
|                | Seconds     | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       |
| 400.perlbench  | 902         | 10.8        | 890        | 11.0        | <u>897</u>  | <u>10.9</u> | <u>706</u> | <u>13.8</u> | 705        | 13.9        | 707         | 13.8        |
| 401.bzip2      | 967         | 9.98        | 955        | 10.1        | <u>966</u>  | <u>9.99</u> | 907        | 10.6        | <u>910</u> | <u>10.6</u> | 911         | 10.6        |
| 403.gcc        | <u>758</u>  | <u>10.6</u> | 756        | 10.7        | 758         | 10.6        | <u>733</u> | <u>11.0</u> | 732        | 11.0        | 733         | 11.0        |
| 429.mcf        | 1020        | 8.94        | <u>761</u> | <u>12.0</u> | 760         | 12.0        | 630        | 14.5        | <u>630</u> | <u>14.5</u> | 632         | 14.4        |
| 445.gobmk      | <u>897</u>  | <u>11.7</u> | 898        | 11.7        | 897         | 11.7        | <u>897</u> | <u>11.7</u> | 898        | 11.7        | 897         | 11.7        |
| 456.hmmer      | 641         | 14.5        | <u>641</u> | <u>14.6</u> | 639         | 14.6        | <u>395</u> | <u>23.6</u> | 395        | 23.6        | 395         | 23.6        |
| 458.sjeng      | <u>1003</u> | <u>12.1</u> | 1002       | 12.1        | 1004        | 12.0        | 909        | 13.3        | <u>909</u> | <u>13.3</u> | 908         | 13.3        |
| 462.libquantum | 448         | 46.2        | 448        | 46.3        | <u>448</u>  | <u>46.3</u> | 400        | 51.8        | <u>405</u> | <u>51.2</u> | 406         | 51.1        |
| 464.h264ref    | 1236        | 17.9        | 1208       | 18.3        | <u>1217</u> | <u>18.2</u> | 1236       | 17.9        | 1208       | 18.3        | <u>1217</u> | <u>18.2</u> |
| 471.omnetpp    | 581         | 10.8        | 581        | 10.8        | <u>581</u>  | <u>10.8</u> | 581        | 10.8        | 581        | 10.8        | <u>581</u>  | <u>10.8</u> |
| 473.astar      | 729         | 9.63        | 727        | 9.66        | <u>727</u>  | <u>9.66</u> | 718        | 9.78        | 720        | 9.75        | <u>718</u>  | <u>9.77</u> |
| 483.xalancbmk  | 590         | 11.7        | 588        | 11.7        | <u>590</u>  | <u>11.7</u> | <u>532</u> | <u>13.0</u> | 532        | 13.0        | 531         | 13.0        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
PGI\_HUGE\_PAGES set to 896  
Total number of huge pages available is 7168

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 14.8

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

SPECint\_base2006 = 13.2

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

## Base Portability Flags (Continued)

403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32  
-Mconcur=innermost -Msmartalloc=huge:896 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsxe -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mloop32  
-Msmartalloc=huge:896 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 14.8**

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

**SPECint\_base2006 = 13.2**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** May-2008

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:8(pass 2)  
-Mipa=inline(pass 2) -fast -O4 -Mfprelaxed  
-Msmartalloc=huge:896 -Mnounroll -Mnovect -tp barcelona-64  
-Bstatic\_pgi

401.bzip2: -Mpfi(pass 1) -Mconcur=innermost(pass 2) -Mpfo(pass 2)  
-fast -O4 -Msmartalloc=huge:896 -Mnounroll  
-tp barcelona-64 -Bstatic\_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mconcur(pass 2)  
-Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -fastsse -Mfprelaxed  
-Msmartalloc=huge:896 -tp barcelona -Bstatic\_pgi

429.mcf: -fastsse -Mconcur -Mipa=jobs:8 -Mipa=fast -Mipa=inline:1  
-Msmartalloc=huge:896 -Mloop32 -tp barcelona -Bstatic\_pgi

445.gobmk: basepeak = yes

456.hmmr: -fastsse -Munroll=n:8 -Msmartalloc=huge:896 -Mfprelaxed  
-Mvect=partial -Msafeptr -Mipa=jobs:8 -Mipa=const  
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
-Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mconcur(pass 2)  
-Mpfo(pass 2) -fastsse -Msmartalloc=huge:896 -Mfprelaxed  
-tp barcelona-64 -Bstatic\_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc -Mvect=nosse  
-Munroll=m:8 -Mconcur=innermost -Mconcur=noaltcode  
-Mipa=jobs:8 -Mipa=fast -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 14.8**

ProLiant DL385 G5  
(2.3 GHz AMD Opteron 2356)

**SPECint\_base2006 = 13.2**

**CPU2006 license:** 3

**Test date:** Mar-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** May-2008

## Peak Optimization Flags (Continued)

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -O4  
-Msmartalloc=huge:896 -Mfprelaxed -Mloop32 --zc\_eh  
-tp barcelona -Bstatic\_pgi

483.xalancbmk: -fastsse -O4 -Mipa=jobs:8 -Mipa=fast -Mipa=inline  
-Mfprelaxed -Msmartalloc -Mloop32 --zc\_eh -tp barcelona  
-Bstatic\_pgi  
-L/proj/qa/smartheap/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:33:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.