



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 21.5**

## IBM System x3400 (Intel Xeon E5410)

**SPECint\_base2006 = 18.7**

CPU2006 license: 11


Test date: Mar-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

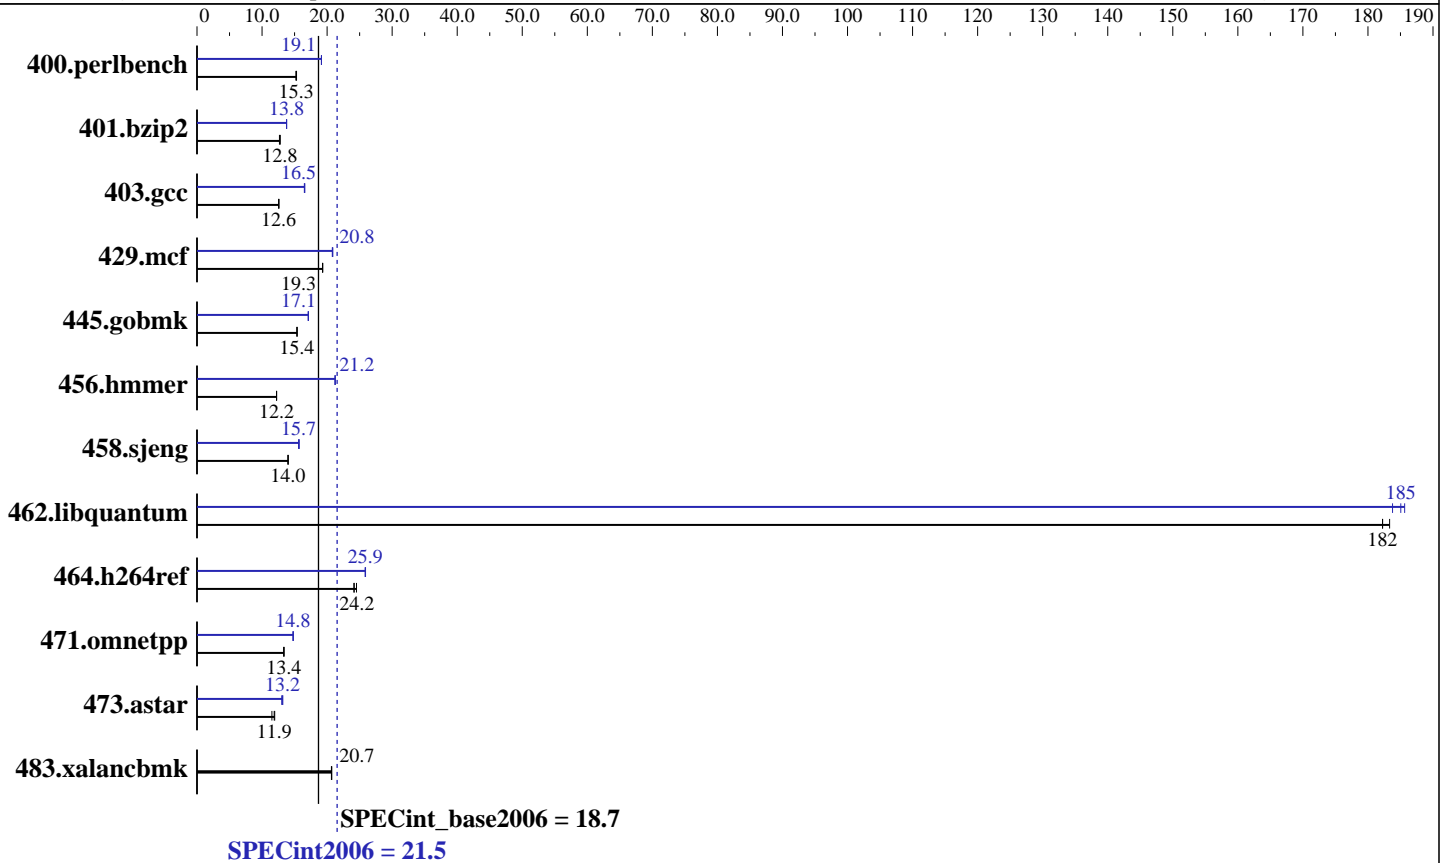

### Hardware

CPU Name: Intel Xeon E5410  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 80 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64), Kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.5

IBM System x3400 (Intel Xeon E5410)

SPECint\_base2006 = 18.7

CPU2006 license: 11

Test date: Mar-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>640</b>	<b>15.3</b>	643	15.2	639	15.3	<b>511</b>	<b>19.1</b>	511	19.1	510	19.1
401.bzip2	761	12.7	756	12.8	<b>756</b>	<b>12.8</b>	700	13.8	<b>701</b>	<b>13.8</b>	701	13.8
403.gcc	641	12.6	640	12.6	<b>640</b>	<b>12.6</b>	488	16.5	<b>486</b>	<b>16.5</b>	486	16.6
429.mcf	473	19.3	<b>472</b>	<b>19.3</b>	472	19.3	437	20.9	<b>438</b>	<b>20.8</b>	438	20.8
445.gobmk	<b>682</b>	<b>15.4</b>	683	15.4	682	15.4	613	17.1	613	17.1	<b>613</b>	<b>17.1</b>
456.hmmmer	762	12.2	763	12.2	<b>763</b>	<b>12.2</b>	<b>439</b>	<b>21.2</b>	440	21.2	439	21.3
458.sjeng	<b>864</b>	<b>14.0</b>	865	14.0	863	14.0	775	15.6	<b>772</b>	<b>15.7</b>	771	15.7
462.libquantum	113	183	114	182	<b>114</b>	<b>182</b>	<b>112</b>	<b>185</b>	112	186	113	184
464.h264ref	918	24.1	<b>915</b>	<b>24.2</b>	903	24.5	854	25.9	856	25.9	<b>855</b>	<b>25.9</b>
471.omnetpp	469	13.3	<b>468</b>	<b>13.4</b>	467	13.4	423	14.8	422	14.8	<b>423</b>	<b>14.8</b>
473.astar	588	11.9	<b>592</b>	<b>11.9</b>	610	11.5	539	13.0	533	13.2	<b>533</b>	<b>13.2</b>
483.xalancbmk	334	20.7	<b>333</b>	<b>20.7</b>	333	20.7	334	20.7	<b>333</b>	<b>20.7</b>	333	20.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode  
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to null  
This result is measured on an IBM System x3500 Server. Note that the IBM System x3500 and IBM System x3400 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECint2006 = 21.5

IBM System x3400 (Intel Xeon E5410) SPECint\_base2006 = 18.7

<b>CPU2006 license:</b> 11	<b>Test date:</b> Mar-2008
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Jan-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Nov-2007

## Base Optimization Flags

C benchmarks:  
 -fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:  
 -xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
 -L/spec/users/rahul/cpu2006.1.0/lib -lsmarheap

## Base Other Flags

C benchmarks:  
 403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
 icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
 -L/opt/intel/cce/10.1.008/lib  
 -I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
 -L/opt/intel/cce/10.1.008/lib  
 -I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
 icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.5

IBM System x3400 (Intel Xeon E5410)

SPECint\_base2006 = 18.7

CPU2006 license: 11

Test date: Mar-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation **SPECint2006 = 21.5**

IBM System x3400 (Intel Xeon E5410) **SPECint\_base2006 = 18.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2008

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Thu Jul 24 16:25:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.