



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard C2SBX

SPECfp<sup>®</sup>\_rate2006 = 44.6

SPECfp\_rate\_base2006 = 42.5

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2008

Hardware Availability: Sep-2007

Software Availability: Feb-2008

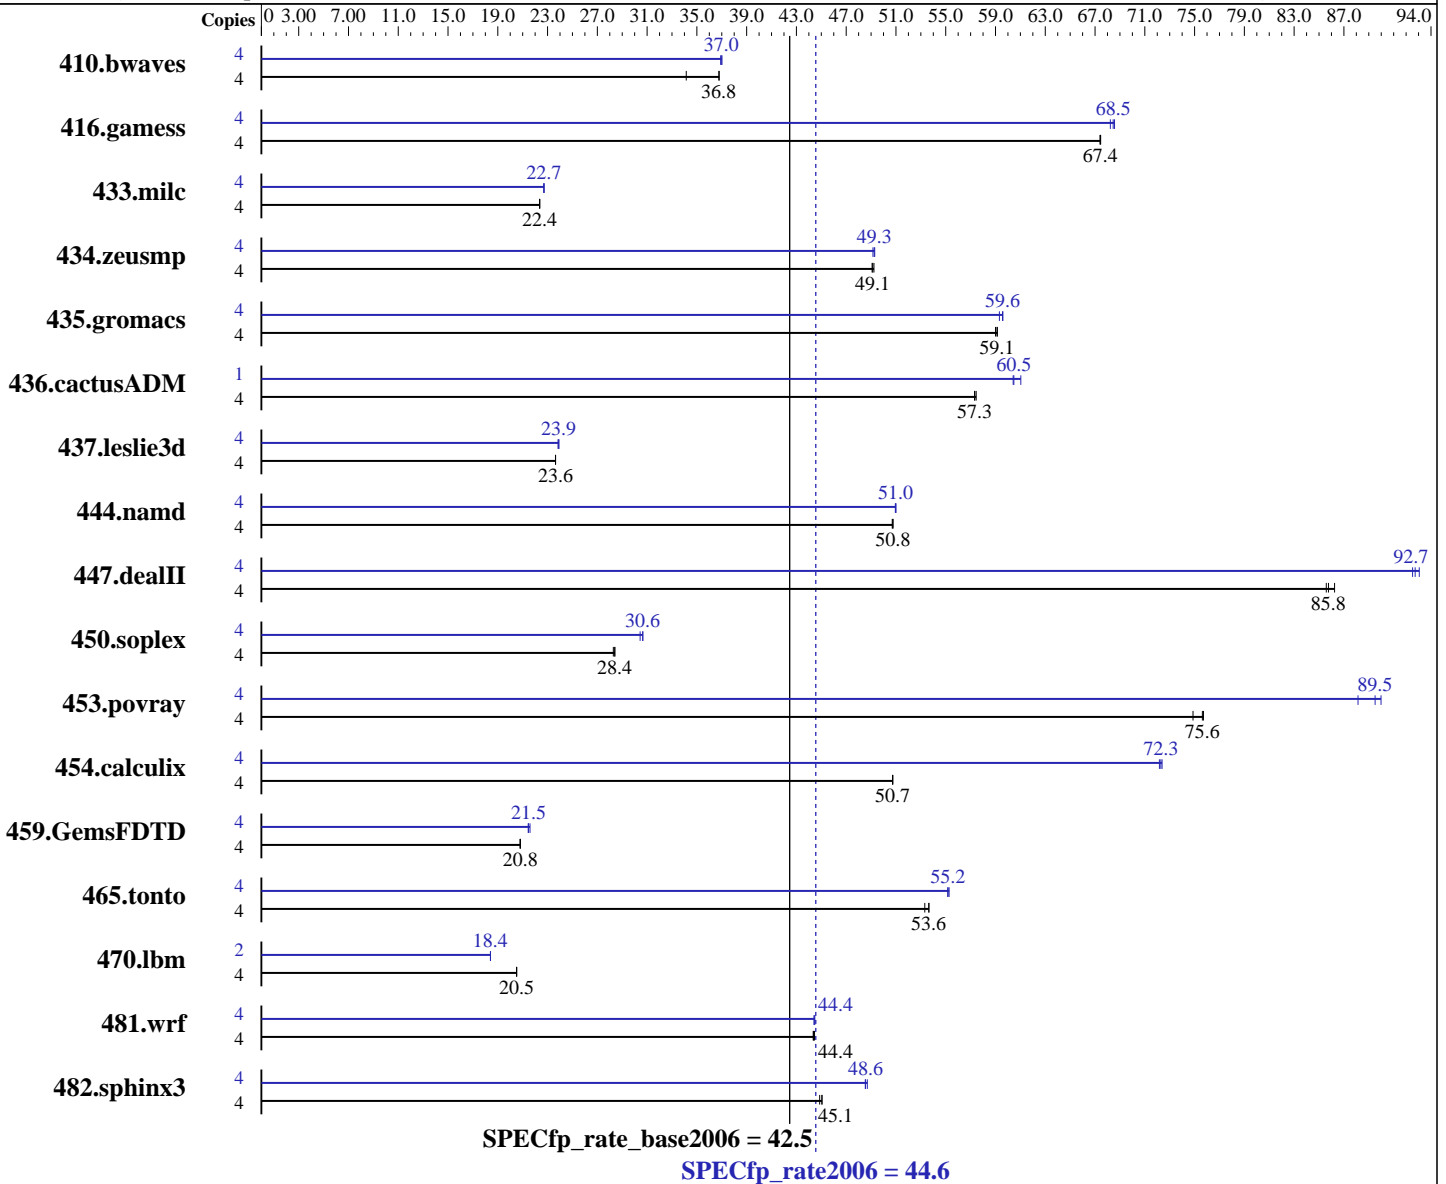

### Hardware

CPU Name: Intel Xeon X3220  
 CPU Characteristics: 2.40 GHz 1066 MHz System Bus  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: 64-Bit Suse Linux Enterprise Server 10 w/SP1  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-usr, level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard C2SBX

SPECfp\_rate2006 = 44.6

SPECfp\_rate\_base2006 = 42.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2008

Hardware Availability: Sep-2007

Software Availability: Feb-2008

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4 x 1 GB PC3-8500U-7-00-BP, DDR3-1066)  
Disk Subsystem: Western Digital WD800JD 80 GB SATA 7200RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1592	34.1	1477	36.8	<b>1479</b>	<b>36.8</b>	4	1473	36.9	1468	37.0	<b>1471</b>	<b>37.0</b>
416.gamess	4	1162	67.4	<b>1162</b>	<b>67.4</b>	1161	67.5	4	1142	68.6	1148	68.2	<b>1144</b>	<b>68.5</b>
433.milc	4	<b>1642</b>	<b>22.4</b>	1642	22.4	1642	22.4	4	1617	22.7	<b>1617</b>	<b>22.7</b>	1617	22.7
434.zeusmp	4	<b>741</b>	<b>49.1</b>	742	49.1	739	49.2	4	<b>739</b>	<b>49.3</b>	738	49.3	741	49.2
435.gromacs	4	<b>483</b>	<b>59.1</b>	483	59.2	484	59.0	4	479	59.6	482	59.3	<b>479</b>	<b>59.6</b>
436.cactusADM	4	<b>834</b>	<b>57.3</b>	832	57.4	834	57.3	1	196	61.0	198	60.4	<b>198</b>	<b>60.5</b>
437.leslie3d	4	1591	23.6	<b>1590</b>	<b>23.6</b>	1590	23.6	4	<b>1573</b>	<b>23.9</b>	1577	23.8	1573	23.9
444.namd	4	<b>632</b>	<b>50.8</b>	633	50.7	632	50.8	4	629	51.0	<b>629</b>	<b>51.0</b>	630	50.9
447.dealII	4	531	86.3	535	85.6	<b>534</b>	<b>85.8</b>	4	492	93.1	495	92.5	<b>493</b>	<b>92.7</b>
450.soplex	4	<b>1175</b>	<b>28.4</b>	1179	28.3	1174	28.4	4	<b>1089</b>	<b>30.6</b>	1088	30.7	1096	30.4
453.povray	4	281	75.7	<b>281</b>	<b>75.6</b>	284	74.9	4	236	90.0	<b>238</b>	<b>89.5</b>	241	88.1
454.calculix	4	<b>650</b>	<b>50.7</b>	651	50.7	650	50.7	4	456	72.4	<b>457</b>	<b>72.3</b>	457	72.2
459.GemsFDTD	4	<b>2040</b>	<b>20.8</b>	2040	20.8	2040	20.8	4	<b>1977</b>	<b>21.5</b>	1966	21.6	1979	21.4
465.tonto	4	738	53.3	<b>734</b>	<b>53.6</b>	734	53.7	4	<b>713</b>	<b>55.2</b>	712	55.3	714	55.2
470.lbm	4	<b>2679</b>	<b>20.5</b>	2679	20.5	2679	20.5	2	1493	18.4	<b>1492</b>	<b>18.4</b>	1492	18.4
481.wrf	4	1007	44.3	1005	44.5	<b>1007</b>	<b>44.4</b>	4	1006	44.4	<b>1006</b>	<b>44.4</b>	1005	44.5
482.sphinx3	4	1730	45.1	<b>1730</b>	<b>45.1</b>	1737	44.9	4	1606	48.5	1601	48.7	<b>1606</b>	<b>48.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to the number of cores in the systems  
BIOS default settings have been used  
All benchmarks compiled in 64-bit mode except 437.leslie3d,  
450.soplex, 470.lbm, and 482.sphinx3 which were compiled  
in 32-bit mode at peak  
"Taskset" command was used to bind benchmark copies to cores  
except for 426.cactusADM at peak

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro  
Motherboard C2SBX

SPECfp\_rate2006 = 44.6

SPECfp\_rate\_base2006 = 42.5

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Feb-2008  
Hardware Availability: Sep-2007  
Software Availability: Feb-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard C2SBX**

**SPECfp\_rate2006 = 44.6**

**SPECfp\_rate\_base2006 = 42.5**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Feb-2008  
**Hardware Availability:** Sep-2007  
**Software Availability:** Feb-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc  
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc  
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort  
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib  
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard C2SBX**

**SPECfp\_rate2006 = 44.6**

**SPECfp\_rate\_base2006 = 42.5**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Feb-2008  
**Hardware Availability:** Sep-2007  
**Software Availability:** Feb-2008

## Peak Optimization Flags (Continued)

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro  
Motherboard C2SBX

SPECfp\_rate2006 = 44.6

SPECfp\_rate\_base2006 = 42.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2008

Hardware Availability: Sep-2007

Software Availability: Feb-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.05.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.05.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 18:03:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 April 2008.