



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Limited PRIMEQUEST 580A

SPECfp<sup>®</sup>\_rate2006 = 496

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2008

Hardware Availability: May-2008

Software Availability: Feb-2008

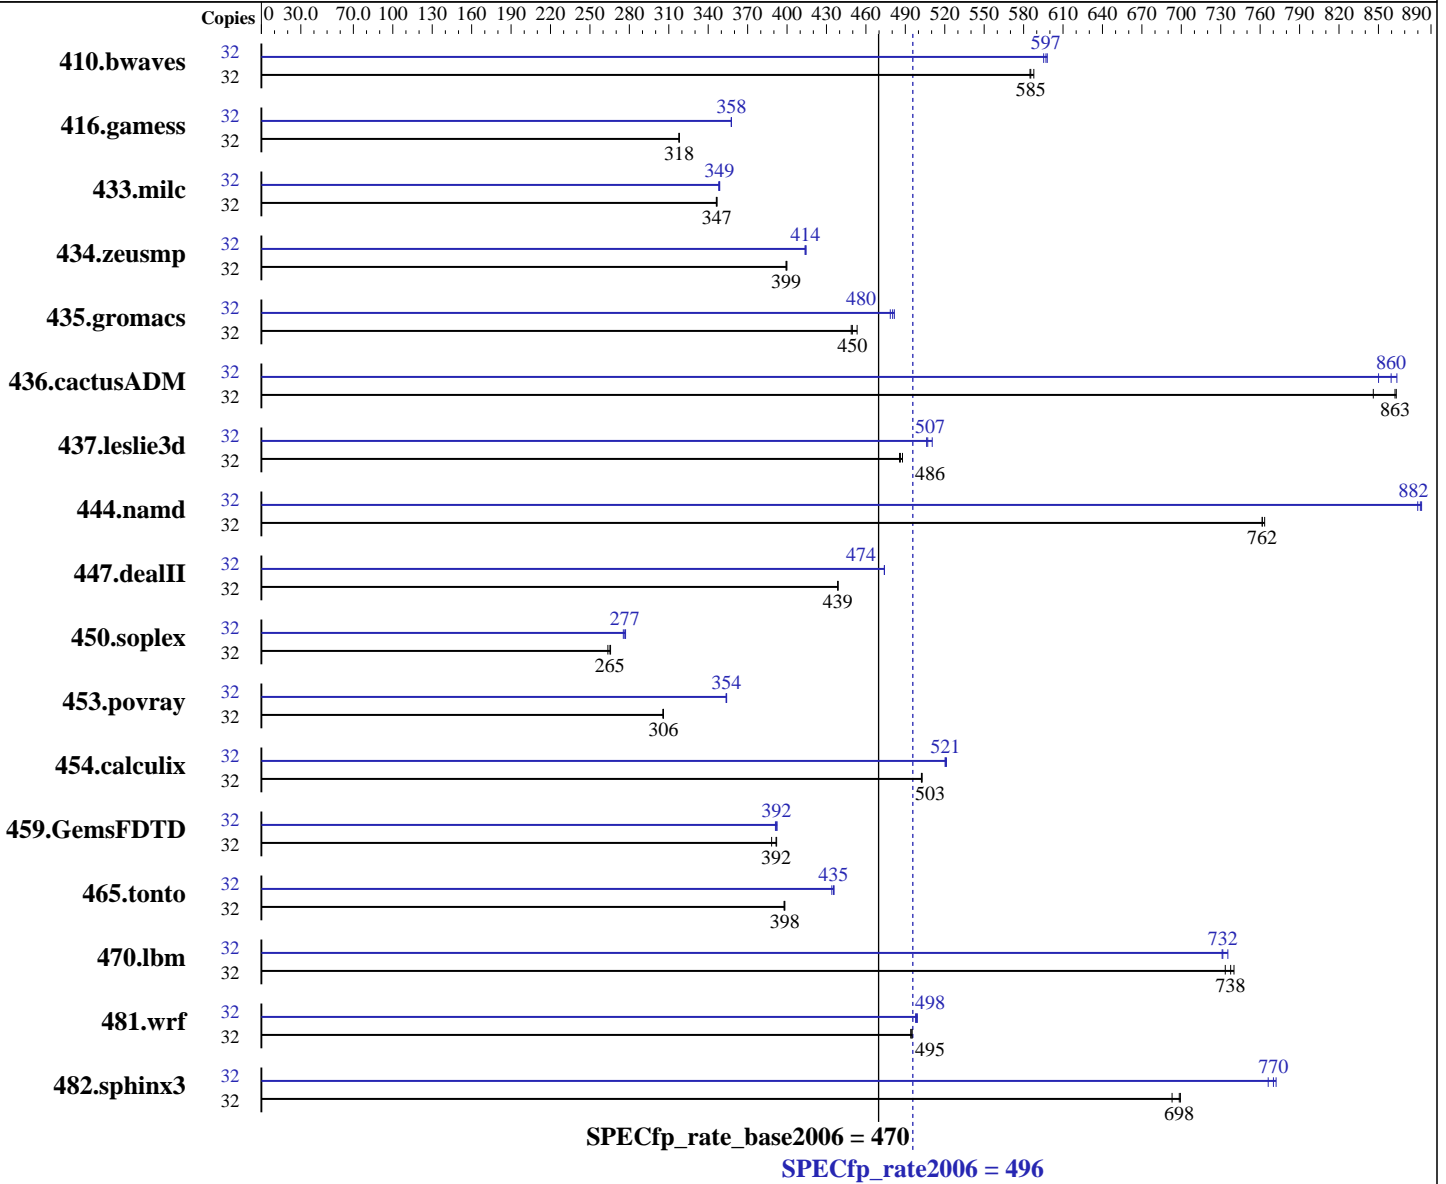

### Hardware

CPU Name: Dual-Core Intel Itanium 9150M  
 CPU Characteristics: 1.66GHz/24MB, 667MHz FSB  
 CPU MHz: 1667  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip  
 CPU(s) orderable: 2-32 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux 5.1,  
 Kernel 2.6.18-53.el5 on an ia64  
 Compiler: Intel C++ Compiler for Linux 10.1  
 (Build 20080112)  
 Intel Fortran Compiler for Linux 10.1  
 (Build 20080112)  
 Auto Parallel: No  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580A

SPECfp\_rate2006 = 496

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Mar-2008  
Hardware Availability: May-2008  
Software Availability: Feb-2008

L3 Cache: 12 MB I+D on chip per core  
Other Cache: None  
Memory: 512 GB (256 x 2GB DDR2-667 DIMMs)  
Disk Subsystem: 2 x 147GB (SCSI Ultra 320, 10000rpm)  
No RAID configuration  
Other Hardware: None

System State: Runlevel 1 (single user mode)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	740	588	<b>743</b>	<b>585</b>	744	585	32	731	595	<b>728</b>	<b>597</b>	727	598		
416.gamess	32	1971	318	1971	318	<b>1971</b>	<b>318</b>	32	1752	358	<b>1752</b>	<b>358</b>	1752	358		
433.milc	32	847	347	849	346	<b>848</b>	<b>347</b>	32	842	349	<b>843</b>	<b>349</b>	844	348		
434.zeusmp	32	728	400	729	399	<b>729</b>	<b>399</b>	32	704	414	703	414	<b>703</b>	<b>414</b>		
435.gromacs	32	509	449	504	453	<b>508</b>	<b>450</b>	32	474	482	<b>476</b>	<b>480</b>	477	479		
436.cactusADM	32	443	864	<b>443</b>	<b>863</b>	452	846	32	<b>445</b>	<b>860</b>	450	850	443	864		
437.leslie3d	32	619	486	617	488	<b>619</b>	<b>486</b>	32	589	510	<b>593</b>	<b>507</b>	594	506		
444.namd	32	<b>337</b>	<b>762</b>	337	762	336	763	32	<b>291</b>	<b>882</b>	292	880	291	883		
447.dealII	32	834	439	<b>835</b>	<b>439</b>	835	439	32	<b>772</b>	<b>474</b>	772	474	772	474		
450.soplex	32	1004	266	1012	264	<b>1006</b>	<b>265</b>	32	963	277	<b>965</b>	<b>277</b>	969	275		
453.povray	32	557	305	<b>556</b>	<b>306</b>	556	306	32	481	354	481	354	<b>481</b>	<b>354</b>		
454.calculix	32	525	503	<b>525</b>	<b>503</b>	526	502	32	506	521	507	520	<b>507</b>	<b>521</b>		
459.GemsFDTD	32	<b>867</b>	<b>392</b>	866	392	874	388	32	868	391	<b>866</b>	<b>392</b>	865	392		
465.tonto	32	<b>791</b>	<b>398</b>	791	398	792	398	32	723	436	<b>723</b>	<b>435</b>	725	434		
470.lbm	32	594	740	<b>596</b>	<b>738</b>	599	733	32	598	735	601	731	<b>601</b>	<b>732</b>		
481.wrf	32	722	495	723	494	<b>722</b>	<b>495</b>	32	716	499	<b>717</b>	<b>498</b>	718	498		
482.sphinx3	32	<b>893</b>	<b>698</b>	900	693	892	699	32	808	772	<b>810</b>	<b>770</b>	814	766		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Processes are bound to CPUs using taskset.

limit stacksize unlimited

Memory system is in "Non Mirror Mode".

The following 2 environment variables were set

MALLOC\_MMAP\_MAX=0

MALLOC\_TRIM\_THRESHOLD=-1

This will cause use of sbrk() calls instead of  
mmap() calls to get memory from the system.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580A

SPECfp\_rate2006 = 496  
SPECfp\_rate\_base2006 = 470

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Mar-2008  
Hardware Availability: May-2008  
Software Availability: Feb-2008

## General Notes (Continued)

Only one CPU is installed per FSB,  
instead of maximum two CPUs.

## Base Compiler Invocation

C benchmarks:  
icc  
C++ benchmarks:  
icpc  
Fortran benchmarks:  
ifort  
Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast -IPF\_fp\_relaxed -opt-prefetch-next-iteration -ansi-alias  
C++ benchmarks:  
-fast -IPF\_fp\_relaxed -opt-prefetch-next-iteration -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580A

SPECfp\_rate2006 = 496

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Mar-2008  
Hardware Availability: May-2008  
Software Availability: Feb-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-fast -IPF-fp-relaxed -opt-prefetch-next-iteration`

Benchmarks using both Fortran and C:

`-fast -IPF_fp_relaxed -opt-prefetch-next-iteration -ansi-alias  
-IPF-fp-relaxed`

## Peak Compiler Invocation

C benchmarks:

`icc`

C++ benchmarks:

`icpc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-fno-alias -ansi-alias`

470.lbm: `-fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-ansi-alias`

482.sphinx3: `-prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -fno-alias  
-no-opt-prefetch-initial-values -ansi-alias`

C++ benchmarks:

444.namd: `-prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -no-prefetch -auto-ilp32  
-fno-alias -ansi-alias`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580A

SPECfp\_rate2006 = 496

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2008

Hardware Availability: May-2008

Software Availability: Feb-2008

## Peak Optimization Flags (Continued)

447.dealIII: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-inline-factor=150 -no-alias-args -no-opt-loadpair  
-ansi-alias

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -auto-ilp32 -no-alias-args  
-ansi-alias

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -inline-factor=150 -ansi-alias

### Fortran benchmarks:

410.bwaves: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -no-prefetch

434.zeusmp: Same as 410.bwaves

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -no-opt-loadpair

459.GemsFDTD: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -inline-factor=150 -no-prefetch

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed  
-opt-prefetch-next-iteration -no-prefetch -fno-alias  
-ansi-alias

436.cactusADM: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-ansi-alias

454.calculix: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-inline-factor=150 -no-opt-prefetch-initial-values  
-ansi-alias

481.wrf: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration  
-no-opt-loadpair -ansi-alias

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580A.ipf.linux.flags.20090713.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580A

SPECfp\_rate2006 = 496

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Mar-2008

Hardware Availability: May-2008

Software Availability: Feb-2008

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580A.ipf.linux.flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 18:34:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.