



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp®_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

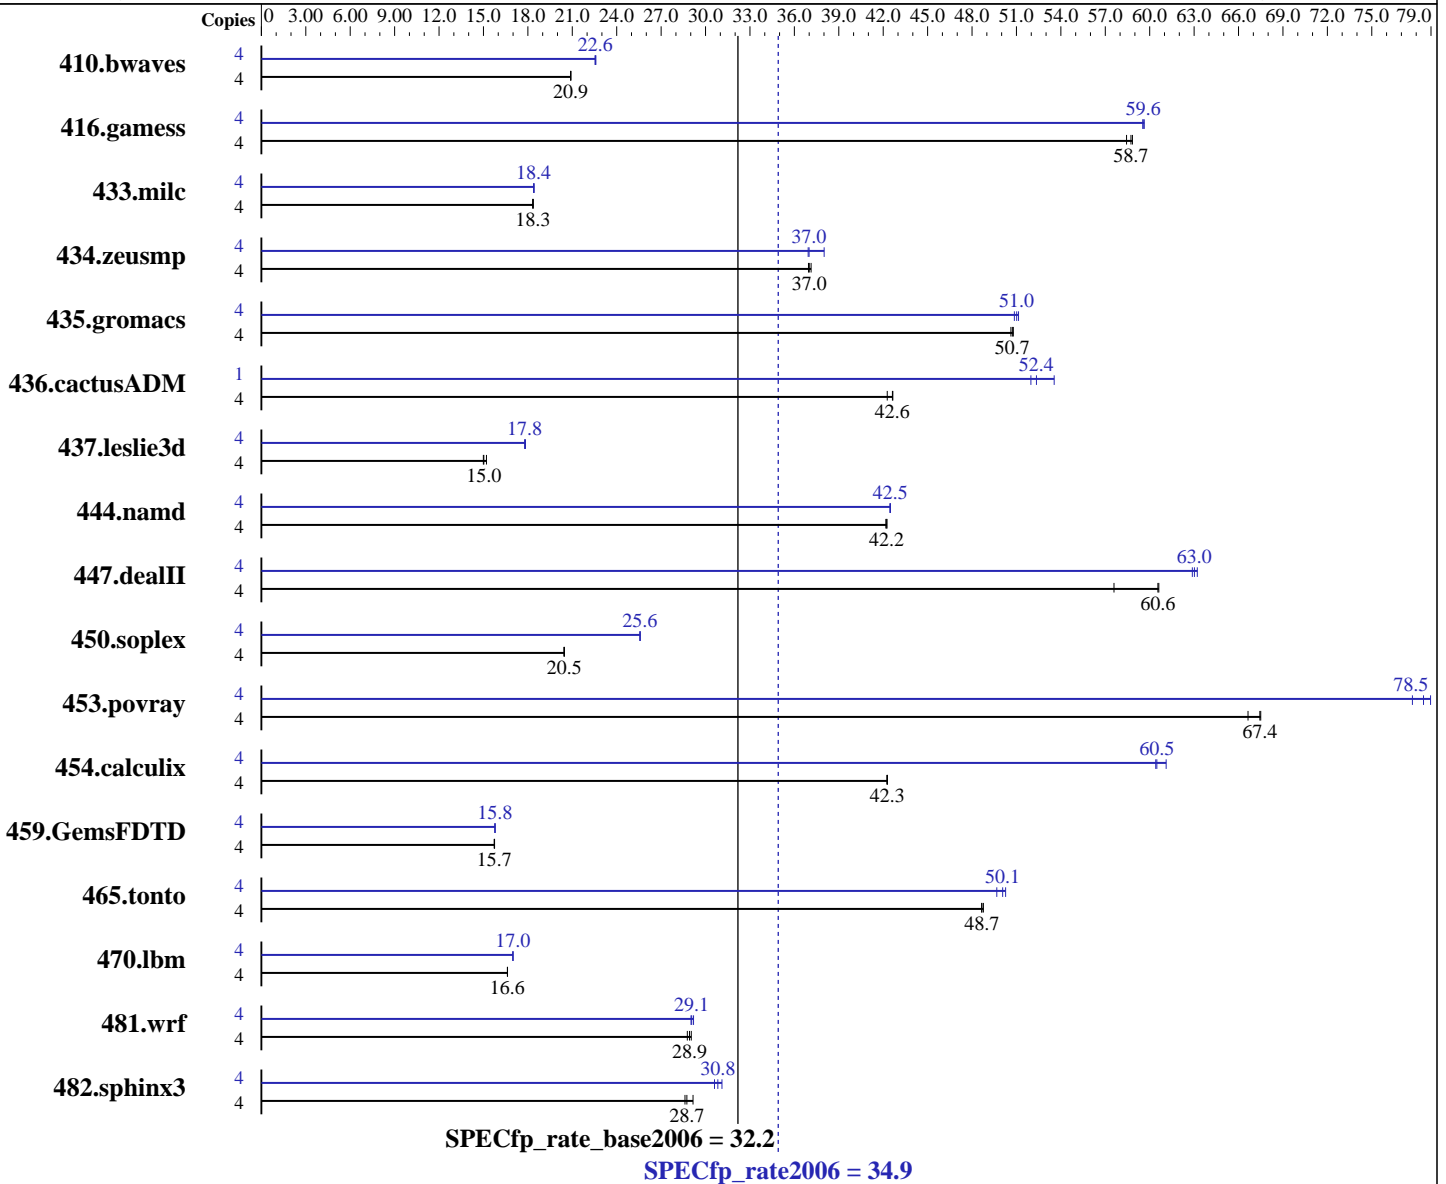

Hardware

CPU Name: Intel Xeon E5405
 CPU Characteristics: 2.00 GHz, 12 MB L2, 1333 MHz system bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE LINUX Enterprise Server 10 SP1, Kernel 2.6.16.46-0.12-smp for x86_64
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2603	20.9	<u>2602</u>	<u>20.9</u>	2600	20.9	4	<u>2409</u>	<u>22.6</u>	2406	22.6	2412	22.5
416.gamess	4	1340	58.4	1331	58.8	<u>1333</u>	<u>58.7</u>	4	<u>1315</u>	<u>59.6</u>	1313	59.6	1316	59.5
433.milc	4	2004	18.3	1999	18.4	<u>2002</u>	<u>18.3</u>	4	1997	18.4	<u>1996</u>	<u>18.4</u>	1993	18.4
434.zeusmp	4	980	37.1	985	37.0	<u>984</u>	<u>37.0</u>	4	958	38.0	986	36.9	<u>984</u>	<u>37.0</u>
435.gromacs	4	564	50.6	562	50.8	<u>563</u>	<u>50.7</u>	4	558	51.1	<u>560</u>	<u>51.0</u>	562	50.9
436.cactusADM	4	1131	42.3	<u>1121</u>	<u>42.6</u>	1121	42.7	1	<u>228</u>	<u>52.4</u>	223	53.5	230	52.0
437.leslie3d	4	<u>2502</u>	<u>15.0</u>	2473	15.2	2508	15.0	4	2108	17.8	<u>2113</u>	<u>17.8</u>	2114	17.8
444.namd	4	761	42.2	759	42.3	<u>760</u>	<u>42.2</u>	4	<u>755</u>	<u>42.5</u>	755	42.5	756	42.5
447.dealII	4	755	60.6	<u>756</u>	<u>60.6</u>	795	57.6	4	<u>726</u>	<u>63.0</u>	728	62.9	724	63.2
450.soplex	4	1630	20.5	<u>1631</u>	<u>20.5</u>	1632	20.4	4	1305	25.6	<u>1304</u>	<u>25.6</u>	1304	25.6
453.povray	4	<u>316</u>	<u>67.4</u>	319	66.6	315	67.5	4	269	79.0	274	77.7	<u>271</u>	<u>78.5</u>
454.calculix	4	780	42.3	781	42.2	<u>780</u>	<u>42.3</u>	4	540	61.1	546	60.4	<u>546</u>	<u>60.5</u>
459.GemsFDTD	4	2699	15.7	<u>2696</u>	<u>15.7</u>	2695	15.8	4	2688	15.8	<u>2689</u>	<u>15.8</u>	2692	15.8
465.tonto	4	809	48.6	807	48.8	<u>809</u>	<u>48.7</u>	4	792	49.7	783	50.3	<u>786</u>	<u>50.1</u>
470.lbm	4	3307	16.6	<u>3307</u>	<u>16.6</u>	3306	16.6	4	3235	17.0	<u>3234</u>	<u>17.0</u>	3234	17.0
481.wrf	4	<u>1545</u>	<u>28.9</u>	1553	28.8	1539	29.0	4	1540	29.0	1531	29.2	<u>1537</u>	<u>29.1</u>
482.sphinx3	4	2674	29.2	<u>2713</u>	<u>28.7</u>	2725	28.6	4	2506	31.1	<u>2529</u>	<u>30.8</u>	2547	30.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores (default)

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex
470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode
The Bull NovaScale R440 E1 (Intel Xeon E5405, 2.00GHz) and
the Bull NovaScale R460 E1 (Intel Xeon E5405, 2.00GHz) models are electronically equivalent.
The results have been measured on a NovaScale R460 E1 (Intel Xeon E5405, 2.00GHz) model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.02.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon E5405, 2.00GHz)

SPECfp_rate2006 = 34.9

SPECfp_rate_base2006 = 32.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:17:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.