



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 71.6

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = 63.5

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

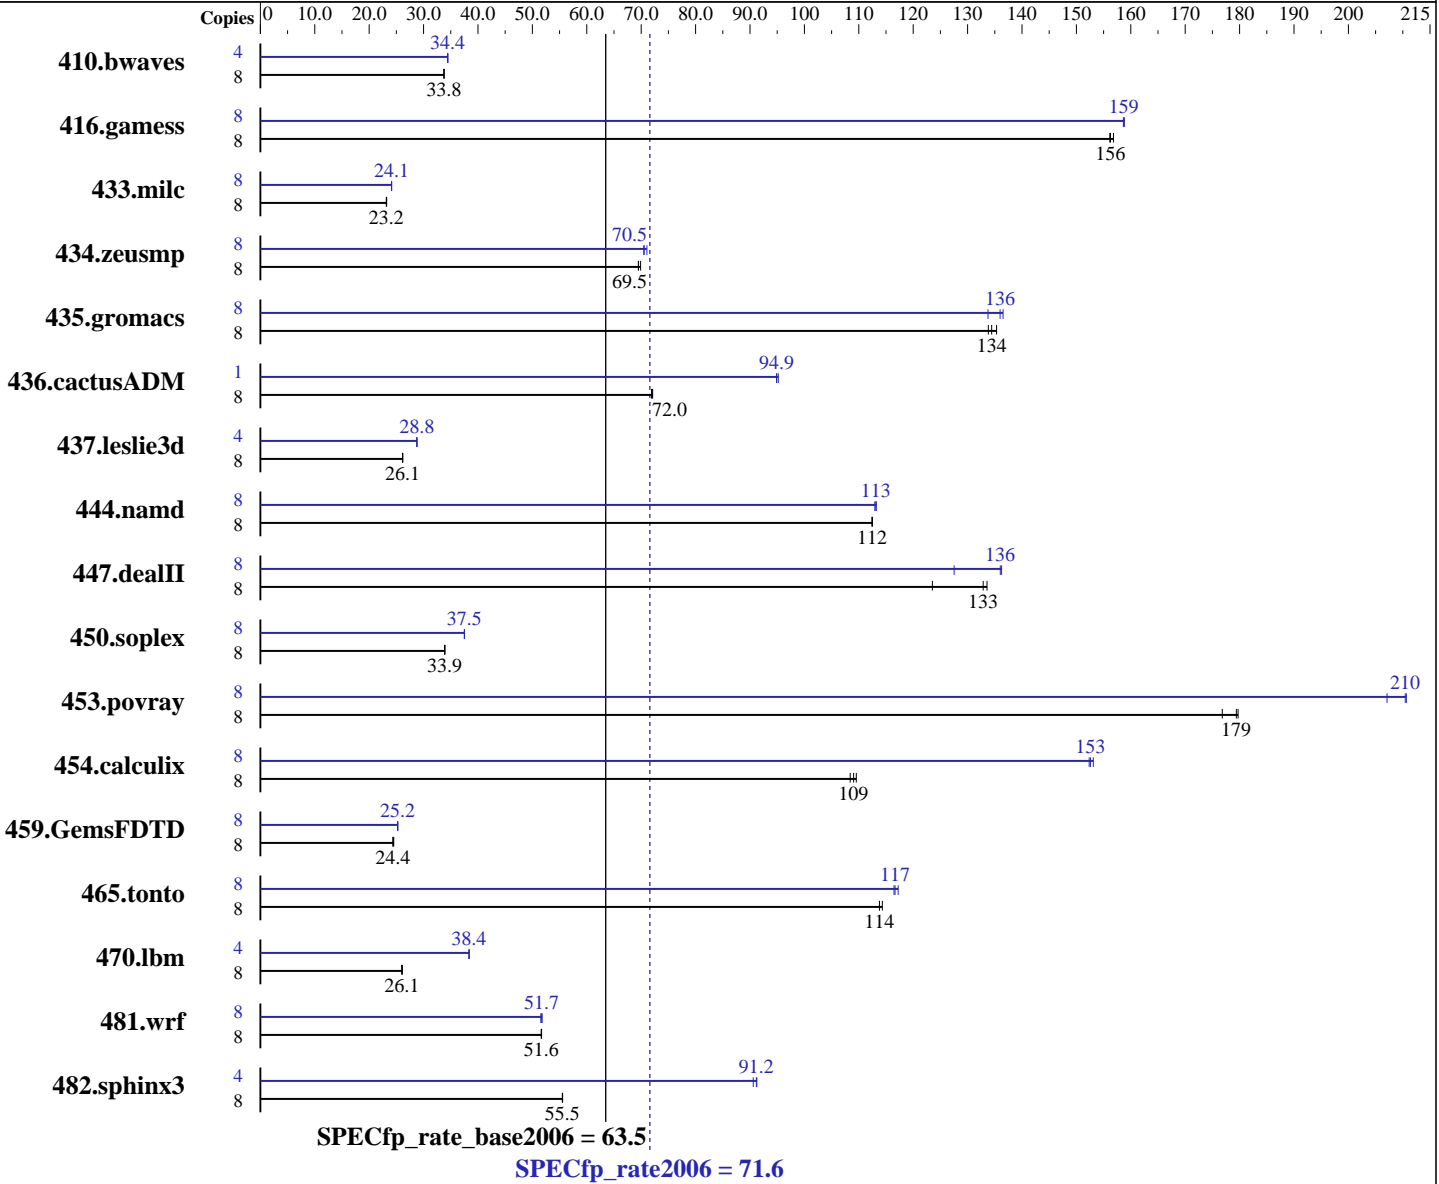

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **71.6**

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = **63.5**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 80 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3221	33.8	3221	33.8	<u>3221</u>	<u>33.8</u>	4	<u>1578</u>	<u>34.4</u>	1578	34.4	1579	34.4
416.gamess	8	<u>1002</u>	<u>156</u>	1003	156	999	157	8	987	159	986	159	<u>987</u>	<u>159</u>
433.milc	8	3163	23.2	3172	23.2	<u>3169</u>	<u>23.2</u>	8	3043	24.1	3048	24.1	<u>3046</u>	<u>24.1</u>
434.zeusmp	8	1042	69.9	<u>1047</u>	<u>69.5</u>	1048	69.5	8	1033	70.5	1025	71.1	<u>1032</u>	<u>70.5</u>
435.gromacs	8	<u>425</u>	<u>134</u>	427	134	422	135	8	427	134	418	137	<u>420</u>	<u>136</u>
436.cactusADM	8	1326	72.1	<u>1328</u>	<u>72.0</u>	1329	71.9	1	<u>126</u>	<u>94.9</u>	126	94.9	126	95.2
437.leslie3d	8	<u>2876</u>	<u>26.1</u>	2877	26.1	2874	26.2	4	<u>1307</u>	<u>28.8</u>	1306	28.8	1308	28.8
444.namd	8	570	112	<u>570</u>	<u>112</u>	571	112	8	568	113	567	113	<u>567</u>	<u>113</u>
447.dealII	8	<u>689</u>	<u>133</u>	685	134	741	124	8	<u>673</u>	<u>136</u>	718	128	672	136
450.soplex	8	<u>1969</u>	<u>33.9</u>	1967	33.9	1969	33.9	8	1778	37.5	1780	37.5	<u>1779</u>	<u>37.5</u>
453.povray	8	<u>237</u>	<u>179</u>	241	177	237	180	8	202	211	206	207	<u>202</u>	<u>210</u>
454.calculix	8	603	110	609	108	<u>605</u>	<u>109</u>	8	433	152	431	153	<u>433</u>	<u>153</u>
459.GemsFDTD	8	<u>3480</u>	<u>24.4</u>	3462	24.5	3485	24.4	8	3362	25.2	3363	25.2	<u>3363</u>	<u>25.2</u>
465.tonto	8	689	114	692	114	<u>692</u>	<u>114</u>	8	671	117	676	116	<u>675</u>	<u>117</u>
470.lbm	8	4231	26.0	<u>4218</u>	<u>26.1</u>	4216	26.1	4	1433	38.4	<u>1433</u>	<u>38.4</u>	1433	38.4
481.wrf	8	1730	51.6	<u>1730</u>	<u>51.6</u>	1729	51.7	8	1726	51.8	1734	51.5	<u>1728</u>	<u>51.7</u>
482.sphinx3	8	2809	55.5	<u>2808</u>	<u>55.5</u>	2806	55.6	4	860	90.6	854	91.3	<u>855</u>	<u>91.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes
This result is measured on an IBM System x 3500 Server. Note that the IBM System x 3500 and IBM System x 3400 are electrically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 71.6

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = 63.5

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 71.6

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = 63.5

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 71.6

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = 63.5

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 71.6

IBM System x3500 (Intel Xeon E5430)

SPECfp_rate_base2006 = 63.5

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:20:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.