



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint®2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19


Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

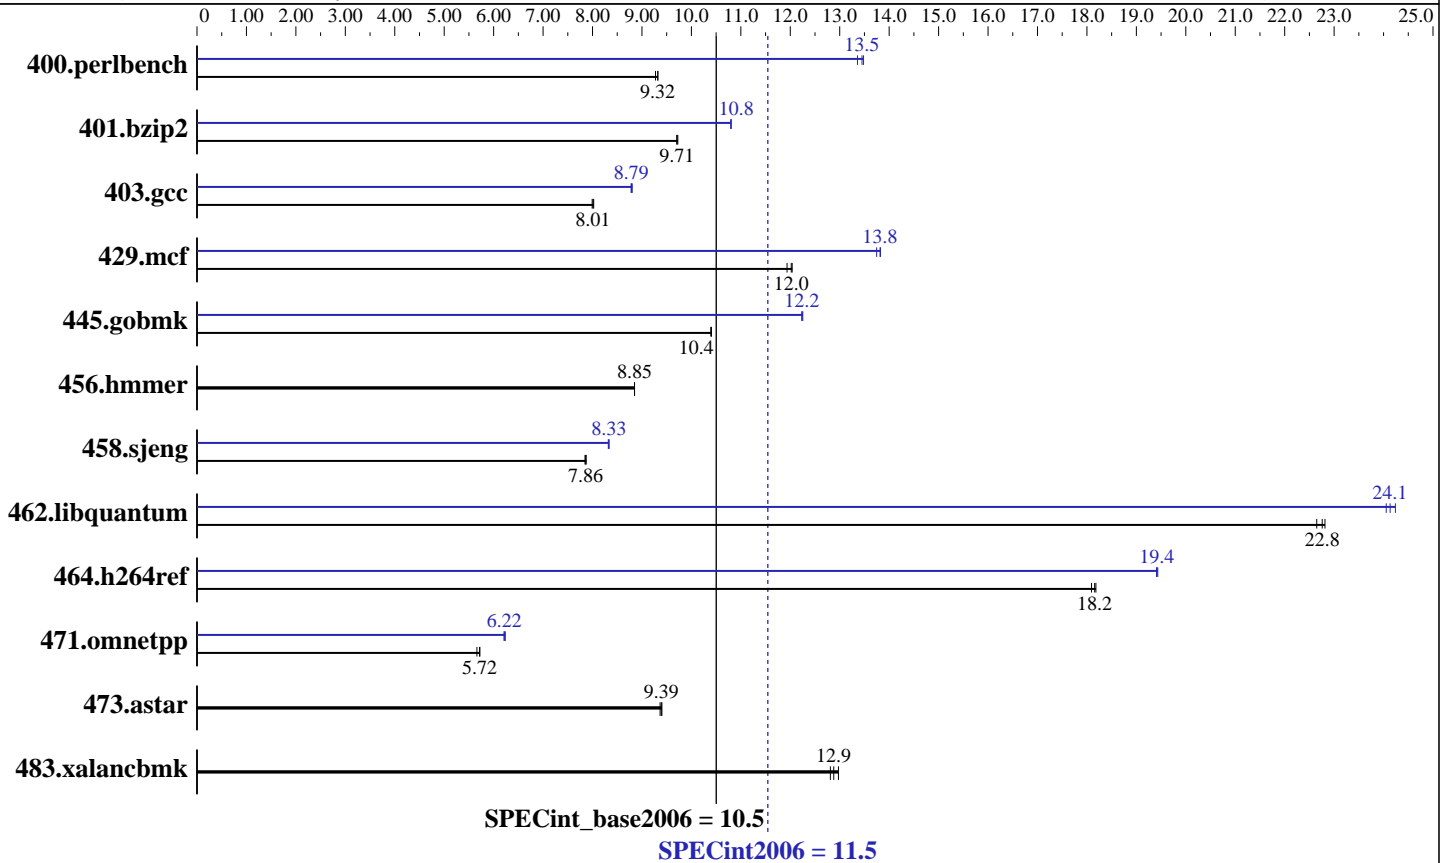

### Hardware

CPU Name: SPARC64 VII  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 to 2 CPUM; each CPUM contains 2 CPU chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 5 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 64 GB (32 x 2 GB)  
 Disk Subsystem: Seagate 73GB 10000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Solaris 10 5/08 with patch 137111-03  
 Compiler: Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1053	9.27	<b>1048</b>	<b>9.32</b>	1048	9.32	<b>726</b>	<b>13.5</b>	725	13.5	731	13.4
401.bzip2	994	9.71	<b>994</b>	<b>9.71</b>	992	9.73	894	10.8	893	10.8	<b>893</b>	<b>10.8</b>
403.gcc	1003	8.02	1007	7.99	<b>1005</b>	<b>8.01</b>	914	8.80	<b>916</b>	<b>8.79</b>	917	8.78
429.mcf	758	12.0	764	11.9	<b>759</b>	<b>12.0</b>	663	13.7	660	13.8	<b>660</b>	<b>13.8</b>
445.gobmk	1008	10.4	<b>1009</b>	<b>10.4</b>	1009	10.4	856	12.3	858	12.2	<b>857</b>	<b>12.2</b>
456.hammer	<b>1054</b>	<b>8.85</b>	1054	8.85	1054	8.85	<b>1054</b>	<b>8.85</b>	1054	8.85	1054	8.85
458.sjeng	1537	7.87	1542	7.85	<b>1539</b>	<b>7.86</b>	<b>1452</b>	<b>8.33</b>	1452	8.33	1454	8.32
462.libquantum	915	22.6	<b>910</b>	<b>22.8</b>	908	22.8	861	24.1	<b>859</b>	<b>24.1</b>	855	24.2
464.h264ref	1217	18.2	<b>1219</b>	<b>18.2</b>	1223	18.1	<b>1140</b>	<b>19.4</b>	1139	19.4	1140	19.4
471.omnetpp	1104	5.66	1092	5.72	<b>1093</b>	<b>5.72</b>	<b>1005</b>	<b>6.22</b>	1002	6.24	1006	6.21
473.astar	747	9.40	749	9.37	<b>747</b>	<b>9.39</b>	747	9.40	749	9.37	<b>747</b>	<b>9.39</b>
483.xalancbmk	539	12.8	532	13.0	<b>536</b>	<b>12.9</b>	539	12.8	532	13.0	<b>536</b>	<b>12.9</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Sun Studio compiler patches are available at  
[http://developers.sun.com/sunstudio/downloads/patches/ss12\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp)

## Operating System Notes

Environment Variable Settings:

`ulimit -s 131072` was used to limit the space consumed  
by the stack (making more space available for the heap)

System Tunables (/etc/system parameters):

```
tune_t_fsflushr=10
  Controls how many seconds elapse between runs of the
  page flush daemon, fsflush.
autoup=600
  Causes pages older than the listed number of seconds to
  be written by fsflush.
bufhwm=3000
  Memory byte limit for caching I/O buffers
segmap_percent=1
  Set maximum percent memory for file system cache
```

Other System Settings:

The webconsole service was turned off using

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

## Operating System Notes (Continued)

svcadm disable webconsole

## Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M4000 Server. Note that the Sun SPARC Enterprise M4000 and Fujitsu SPARC Enterprise M4000 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
403.gcc: -DSPEC\_CPU\_SOLARIS  
462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=1  
-xalias\_level=std -ll2amm

C++ benchmarks:

-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=2 -xalias\_level=compatible -lfast

## Base Other Flags

C benchmarks:

-xjobs=16 -V -#

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

## Base Other Flags (Continued)

C++ benchmarks:

-xjobs=16 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=std -Xc -xipo=2 -xrestrict  
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2 -m32 -xarch=sparcvis2  
-xalias\_level=std -xprefetch\_auto\_type=indirect\_array\_access  
-xprefetch\_level=2 -l12amm

429.mcf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xprefetch\_level=3 -W2,-Apf:l1list=3 -W2,-Apf:noinnerl1list

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=std -xrestrict

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19

Test date: Jul-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

## Peak Optimization Flags (Continued)

456.hmmr: basepeak = yes

458.sjeng: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2

462.libquantum: Same as 458.sjeng

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xipo=2 -xalias\_level=std -m32  
-xarch=sparcvis2 -xprefetch=no -l12amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4  
-xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=compatible -xipo=2  
-xprefetch\_level=2 -Qoption cg -Qlp-av=0 -lfast

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint2006 = 11.5

Fujitsu SPARC Enterprise M4000

SPECint\_base2006 = 10.5

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 18:48:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2008.