



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 78.3

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint\_rate\_base2006 = 67.9

CPU2006 license: 55


Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

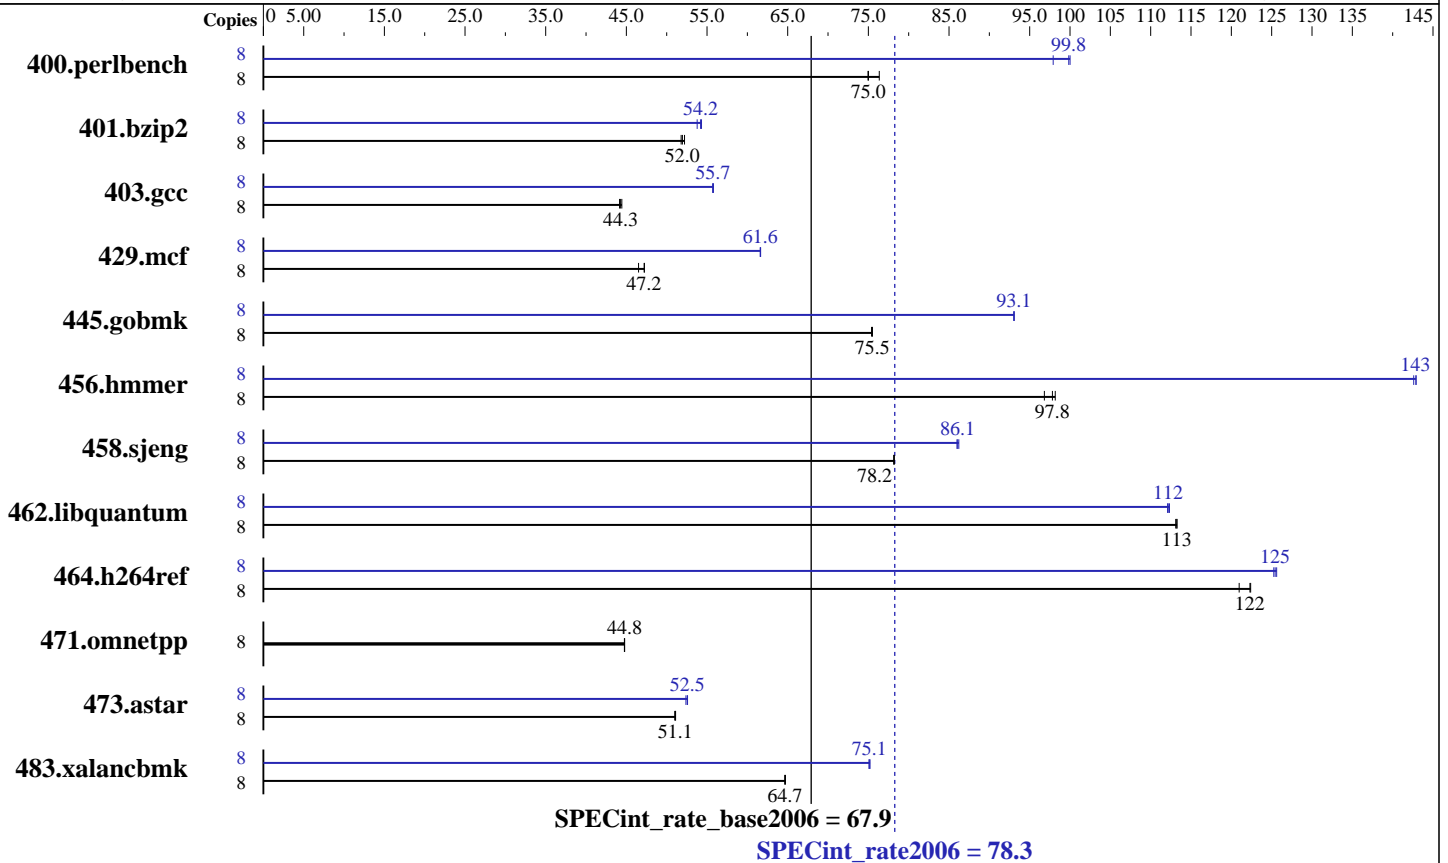

### Hardware

CPU Name: AMD Opteron 2347 HE  
 CPU Characteristics:  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8 x 2GB, DDR2-667 CL5)  
 Disk Subsystem: 1 x 73GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 78.3

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint\_rate\_base2006 = 67.9

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1024	76.4	<b>1042</b>	<b>75.0</b>	1043	75.0	8	798	97.9	782	100	<b>783</b>	<b>99.8</b>
401.bzip2	8	1479	52.2	1491	51.8	<b>1486</b>	<b>52.0</b>	8	1436	53.8	1421	54.3	<b>1424</b>	<b>54.2</b>
403.gcc	8	1449	44.4	<b>1454</b>	<b>44.3</b>	1459	44.2	8	1156	55.7	1154	55.8	<b>1155</b>	<b>55.7</b>
429.mcf	8	1569	46.5	1544	47.2	<b>1546</b>	<b>47.2</b>	8	<b>1184</b>	<b>61.6</b>	1184	61.6	1184	61.6
445.gobmk	8	<b>1112</b>	<b>75.5</b>	1113	75.4	1112	75.5	8	902	93.0	<b>902</b>	<b>93.1</b>	902	93.1
456.hmmer	8	771	96.8	760	98.2	<b>763</b>	<b>97.8</b>	8	<b>522</b>	<b>143</b>	522	143	523	143
458.sjeng	8	<b>1238</b>	<b>78.2</b>	1239	78.2	1238	78.2	8	<b>1125</b>	<b>86.1</b>	1126	86.0	1123	86.2
462.libquantum	8	1466	113	1463	113	<b>1464</b>	<b>113</b>	8	1479	112	1476	112	<b>1478</b>	<b>112</b>
464.h264ref	8	1463	121	<b>1448</b>	<b>122</b>	1446	122	8	1409	126	1413	125	<b>1411</b>	<b>125</b>
471.omnetpp	8	<b>1117</b>	<b>44.8</b>	1116	44.8	1117	44.8	8	<b>1117</b>	<b>44.8</b>	1116	44.8	1117	44.8
473.astar	8	1099	51.1	<b>1100</b>	<b>51.1</b>	1101	51.0	8	1072	52.4	<b>1069</b>	<b>52.5</b>	1068	52.6
483.xalancbmk	8	853	64.7	<b>854</b>	<b>64.7</b>	854	64.7	8	<b>735</b>	<b>75.1</b>	734	75.2	735	75.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
mount -t hugetlbfs nodev /mnt/hugepages
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 78.3

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint\_rate\_base2006 = 67.9

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
--zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 78.3

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint\_rate\_base2006 = 67.9

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
           -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
           -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
          -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
            -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
            -Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
            -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
            -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
            -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
            -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
                -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
                -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
              -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
              -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
              -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 78.3

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint\_rate\_base2006 = 67.9

CPU2006 license: 55

Test date: Jun-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:25:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2008.