



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint[®]_rate2006 = 70.7

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECint_rate_base2006 = 59.3

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

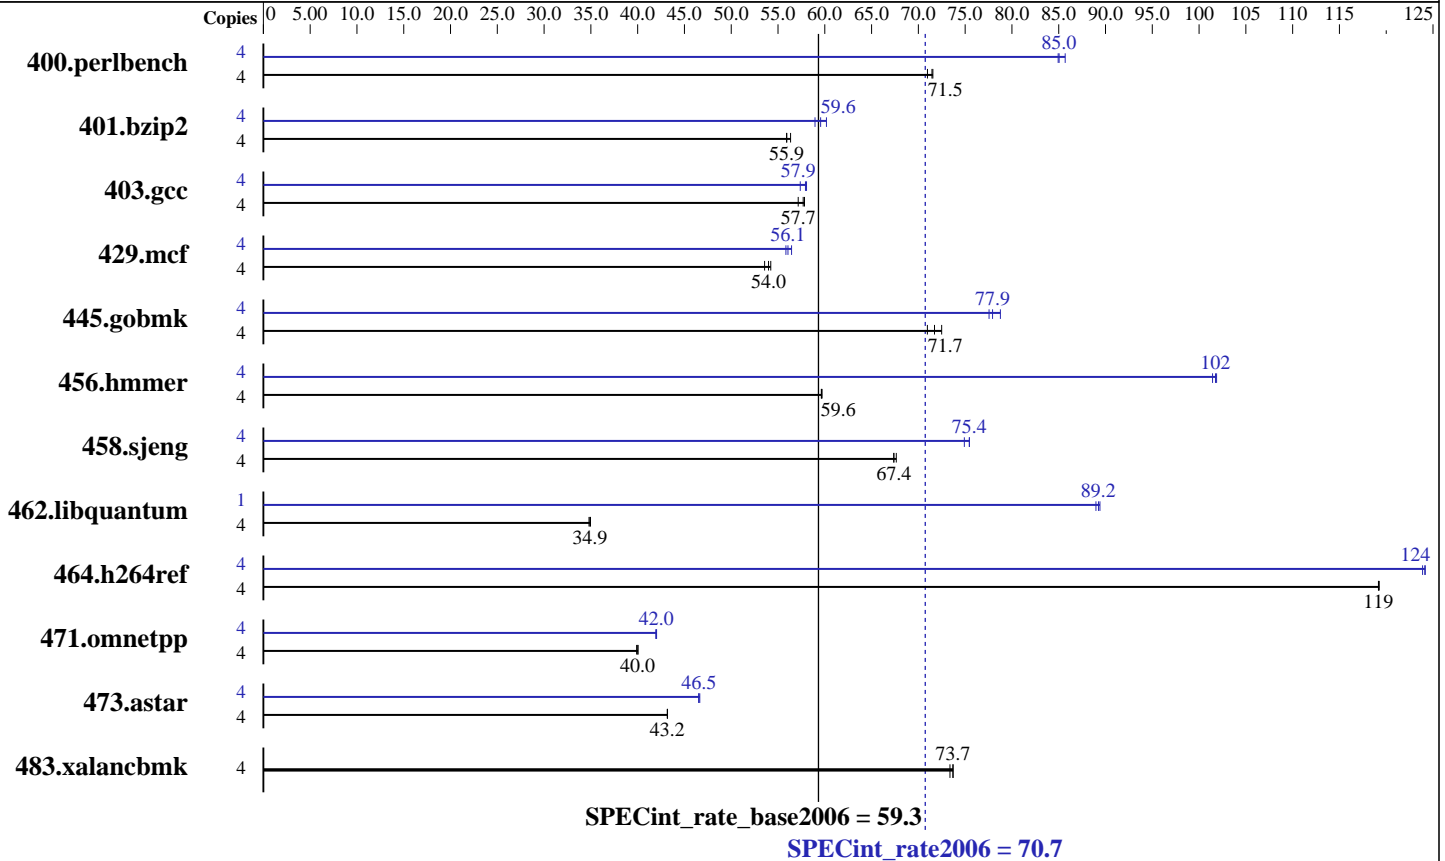

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL 5-5-5, ECC)
 Disk Subsystem: 1x SAS, 73 GB, 15000 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64, Version 10.1, Build 20070913
 Auto Parallel: Yes
 File System: ext2
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.50.0.5-0.1.x86_64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 70.7

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECint_rate_base2006 = 59.3

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	547	71.5	551	71.0	546	71.5	4	460	84.9	460	85.0	456	85.7
401.bzip2	4	690	55.9	690	55.9	685	56.3	4	655	59.0	648	59.6	641	60.2
403.gcc	4	563	57.2	557	57.8	558	57.7	4	561	57.4	556	57.9	555	58.0
429.mcf	4	681	53.6	676	54.0	673	54.2	4	653	55.8	651	56.1	646	56.4
445.gobmk	4	579	72.5	585	71.7	591	71.0	4	541	77.6	538	77.9	533	78.8
456.hmmmer	4	626	59.6	625	59.7	626	59.6	4	367	102	368	101	366	102
458.sjeng	4	716	67.6	718	67.4	718	67.4	4	646	74.9	642	75.4	641	75.5
462.libquantum	4	2382	34.8	2371	35.0	2375	34.9	1	233	89.0	232	89.2	232	89.4
464.h264ref	4	742	119	743	119	743	119	4	713	124	713	124	715	124
471.omnetpp	4	627	39.9	624	40.0	625	40.0	4	596	41.9	595	42.0	595	42.0
473.astar	4	650	43.2	651	43.2	650	43.2	4	603	46.5	604	46.5	602	46.6
483.xalancbmk	4	376	73.4	374	73.7	375	73.7	4	376	73.4	374	73.7	375	73.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)

Platform Notes

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Disable

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 70.7

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECint_rate_base2006 = 59.3

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 70.7

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECint_rate_base2006 = 59.3

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 70.7

PRIMERGY RX300 S4, Intel Xeon E5440, 2.83 GHz

SPECint_rate_base2006 = 59.3

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:06:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.