



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

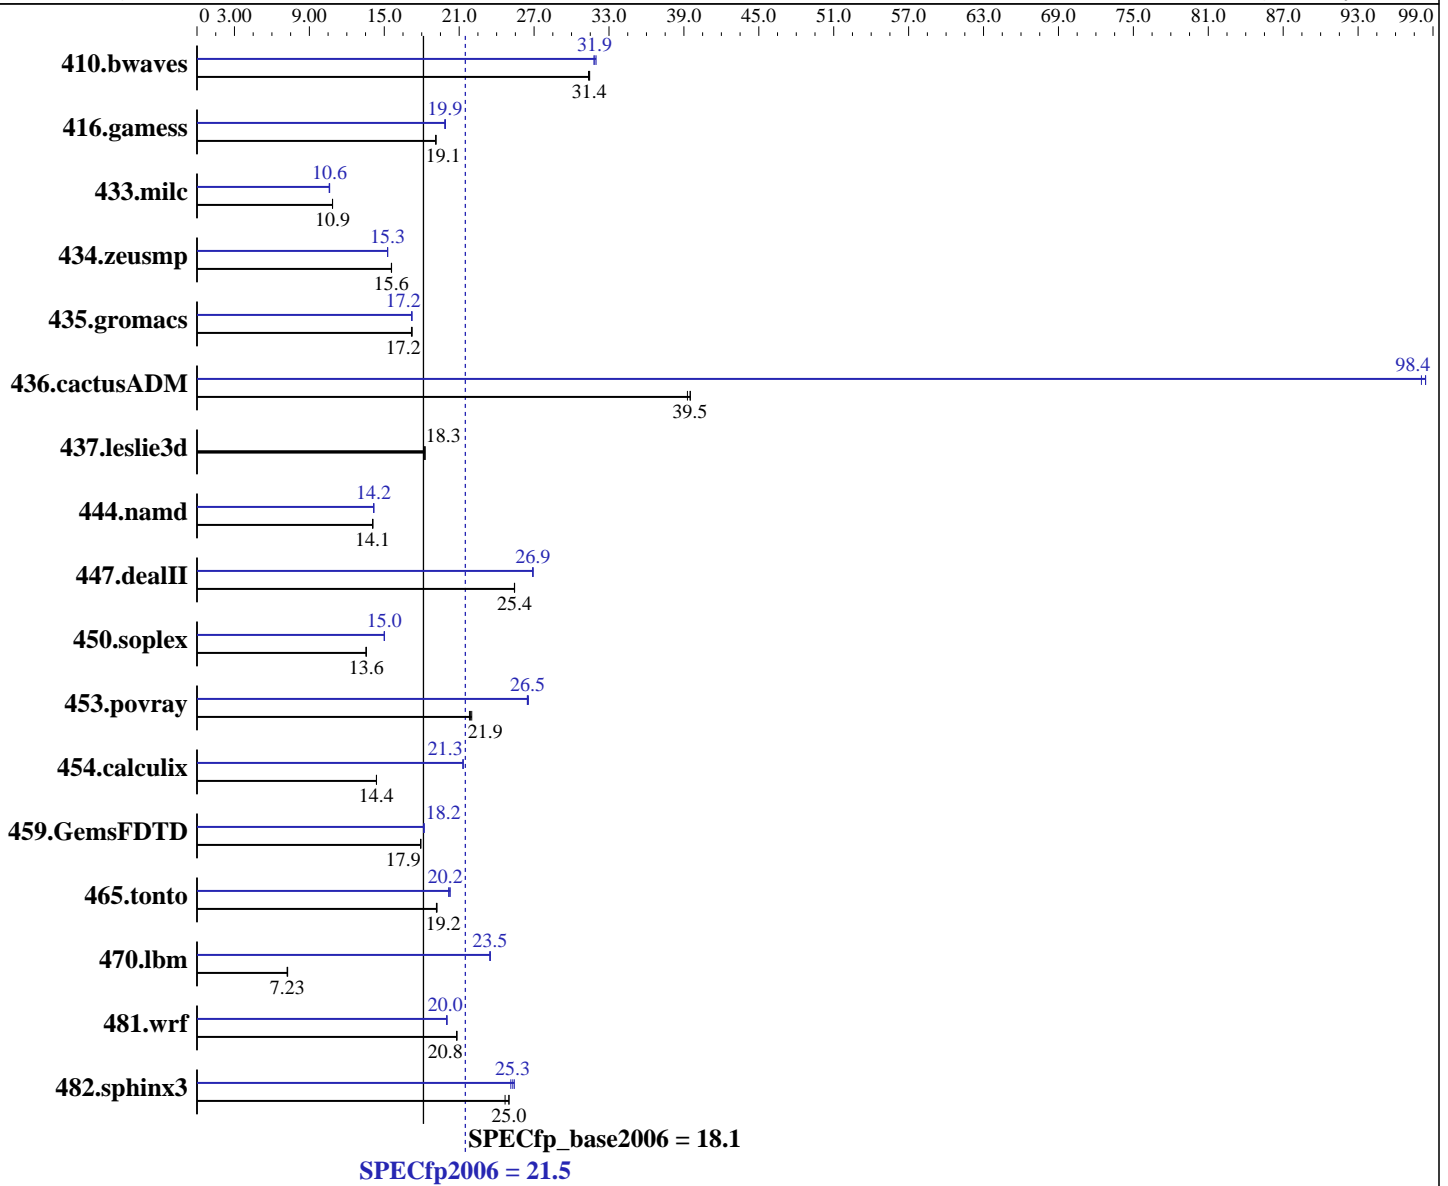

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics:
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20080312 Package ID: l_cc_p_10.1.015, l_fc_p_10.1.015
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 x 4 GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem: 1 x 80 GB 5400 RPM SATA
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	433	31.4	432	31.5	433	31.4	427	31.8	427	31.9	425	32.0
416.gamess	1024	19.1	1023	19.1	1024	19.1	984	19.9	986	19.9	986	19.9
433.milc	846	10.9	845	10.9	846	10.9	867	10.6	864	10.6	865	10.6
434.zeusmp	584	15.6	584	15.6	584	15.6	596	15.3	596	15.3	596	15.3
435.gromacs	415	17.2	415	17.2	416	17.2	415	17.2	415	17.2	415	17.2
436.cactusADM	304	39.3	303	39.5	302	39.5	122	98.1	121	98.4	121	98.4
437.leslie3d	515	18.3	515	18.3	516	18.2	515	18.3	515	18.3	516	18.2
444.namd	570	14.1	569	14.1	570	14.1	567	14.1	566	14.2	567	14.2
447.dealII	450	25.4	450	25.4	450	25.4	426	26.9	425	26.9	425	26.9
450.soplex	616	13.5	615	13.6	615	13.6	555	15.0	556	15.0	556	15.0
453.povray	242	22.0	243	21.9	244	21.8	200	26.5	201	26.5	201	26.5
454.calculix	574	14.4	574	14.4	574	14.4	387	21.3	387	21.3	387	21.3
459.GemsFDTD	592	17.9	592	17.9	592	17.9	584	18.2	583	18.2	584	18.2
465.tonto	512	19.2	513	19.2	513	19.2	485	20.3	487	20.2	488	20.2
470.lbm	1899	7.23	1901	7.23	1892	7.26	585	23.5	585	23.5	586	23.5
481.wrf	536	20.8	537	20.8	537	20.8	558	20.0	558	20.0	558	20.0
482.sphinx3	780	25.0	790	24.7	780	25.0	767	25.4	775	25.1	771	25.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.015/bin/icc -L/opt/intel/cc/10.1.015/lib
-I/opt/intel/cc/10.1.015/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.015/bin/icpc -L/opt/intel/cc/10.1.015/lib
-I/opt/intel/cc/10.1.015/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.5

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECfp_base2006 = 18.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 19:07:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.