



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2008

Hardware Availability: Sep-2008

Software Availability: Mar-2008

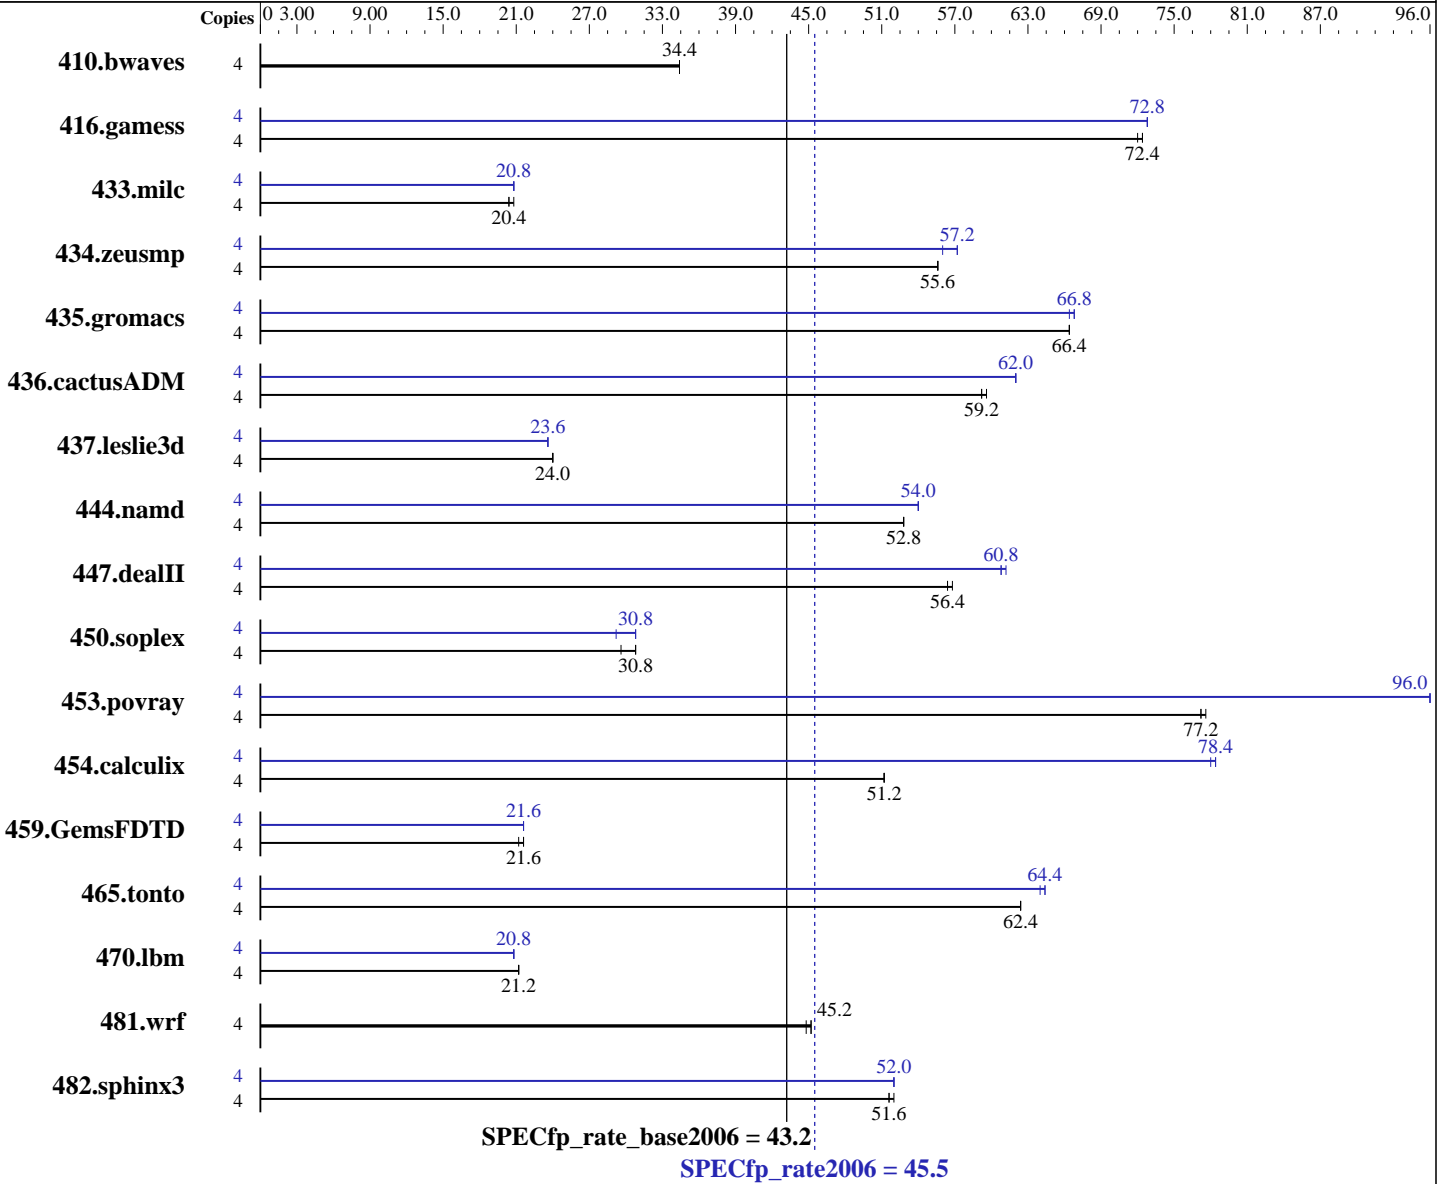

### Hardware

CPU Name: Intel Core 2 Extreme QX9300  
 CPU Characteristics: 1067 MHz Bus Speed  
 CPU MHz: 2530  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: Windows Vista Business SP1 (64bit)  
 Compiler: Intel C++ Compiler for Intel 64, Version 10.1  
 Build 20080312 Package ID: w\_cc\_p\_10.1.021  
 Intel Visual Fortran Compiler for Intel 64,  
 Version 10.1  
 Build 20080312 Package ID: w\_fc\_p\_10.1.021  
 Microsoft Visual Studio 2005 SP1

Auto Parallel: No  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4x2 GB 1067 MHz CL7 DDR3)  
Disk Subsystem: 1 x 80 GB SATA 7200 RPM  
Other Hardware: None

System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap Library 8.1 for x64

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1587	34.4	1586	34.4	<b>1586</b>	<b>34.4</b>	4	1587	34.4	1586	34.4	<b>1586</b>	<b>34.4</b>
416.gamess	4	1085	72.0	1084	72.4	<b>1084</b>	<b>72.4</b>	4	1077	72.8	<b>1077</b>	<b>72.8</b>	1077	72.8
433.milc	4	1773	20.8	<b>1783</b>	<b>20.4</b>	1783	20.4	4	1753	20.8	<b>1759</b>	<b>20.8</b>	1764	20.8
434.zeusmp	4	655	55.6	<b>654</b>	<b>55.6</b>	653	55.6	4	<b>635</b>	<b>57.2</b>	634	57.2	648	56.0
435.gromacs	4	430	66.4	<b>429</b>	<b>66.4</b>	429	66.4	4	429	66.4	<b>429</b>	<b>66.8</b>	429	66.8
436.cactusADM	4	<b>805</b>	<b>59.2</b>	806	59.2	803	59.6	4	771	62.0	773	62.0	<b>773</b>	<b>62.0</b>
437.leslie3d	4	<b>1577</b>	<b>24.0</b>	1578	24.0	1575	24.0	4	<b>1592</b>	<b>23.6</b>	1592	23.6	1591	23.6
444.namd	4	608	52.8	<b>606</b>	<b>52.8</b>	606	52.8	4	595	54.0	594	54.0	<b>594</b>	<b>54.0</b>
447.dealII	4	814	56.4	<b>809</b>	<b>56.4</b>	807	56.8	4	754	60.8	748	61.2	<b>751</b>	<b>60.8</b>
450.soplex	4	1120	29.6	1085	30.8	<b>1086</b>	<b>30.8</b>	4	1136	29.2	<b>1090</b>	<b>30.8</b>	1082	30.8
453.povray	4	<b>275</b>	<b>77.2</b>	276	77.2	275	77.6	4	<b>222</b>	<b>96.0</b>	222	96.0	222	96.0
454.calculix	4	643	51.2	643	51.2	<b>643</b>	<b>51.2</b>	4	<b>421</b>	<b>78.4</b>	424	78.0	421	78.4
459.GemsFDTD	4	1983	21.2	1972	21.6	<b>1972</b>	<b>21.6</b>	4	1948	21.6	<b>1948</b>	<b>21.6</b>	1948	21.6
465.tonto	4	<b>630</b>	<b>62.4</b>	630	62.4	630	62.4	4	<b>612</b>	<b>64.4</b>	610	64.4	613	64.0
470.lbm	4	<b>2576</b>	<b>21.2</b>	2576	21.2	2576	21.2	4	<b>2635</b>	<b>20.8</b>	2634	20.8	2635	20.8
481.wrf	4	987	45.2	<b>990</b>	<b>45.2</b>	998	44.8	4	987	45.2	<b>990</b>	<b>45.2</b>	998	44.8
482.sphinx3	4	1516	51.6	1504	52.0	<b>1507</b>	<b>51.6</b>	4	1503	52.0	<b>1495</b>	<b>52.0</b>	1494	52.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

## Base Compiler Invocation

C benchmarks:  
icl -Qstd=c99

C++ benchmarks:  
icl

Fortran benchmarks:  
ifort

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icl -Qstd=c99 ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

## Base Optimization Flags

```

C benchmarks:
-fast -Qauto-ilp32 /F512000000 -link /FORCE:MULTIPLE

C++ benchmarks:
-fast -Qauto-ilp32 -Qcxx_features /F512000000 shlw64m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-fast -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-fast -Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

```

## Peak Compiler Invocation

C benchmarks:  
icl -Qstd=c99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icl

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Oa /F512000000 -link /FORCE:MULTIPLE

470.lbm: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Qscalar-rep- -Qprefetch /F512000000  
-link /FORCE:MULTIPLE

482.sphinx3: -fast -Qauto-ilp32 -Qunroll2 /F512000000  
-link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Oa -Qcxx\_features /F512000000 shlw64m.lib  
-link /FORCE:MULTIPLE

447.dealII: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Qprefetch -Qcxx\_features /F512000000  
shlw64m.lib -link /FORCE:MULTIPLE

450.soplex: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qcxx\_features /F512000000 shlw64m.lib  
-link /FORCE:MULTIPLE

453.povray: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll4 -Qansi-alias -Qcxx\_features /F512000000  
shlw64m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000  
-link /FORCE:MULTIPLE

434.zeusmp: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qprec-div-  
-Qunroll10 -Qscalar-rep- /F1000000000  
-link /FORCE:MULTIPLE

437.leslie3d: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qprefetch /F1000000000 -link /FORCE:MULTIPLE

459.GemsFDTD: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Ob0 -Qprefetch /F1000000000  
-link /FORCE:MULTIPLE

465.tonto: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll4 -Qauto /F1000000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Oa -Qprefetch /F1000000000  
-link /FORCE:MULTIPLE

436.cactusADM: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qauto-ilp32  
-Qunroll2 -Qprefetch /F1000000000  
-link /FORCE:MULTIPLE

454.calculix: -fast -Qauto-ilp32 -Qunroll-aggressive /F1000000000  
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 45.5

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECfp\_rate\_base2006 = 43.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2008

Hardware Availability: Sep-2008

Software Availability: Mar-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:23:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 November 2008.