



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS


NovaScale R440 E2  
(Intel Xeon E5504, 2.00 GHz)

SPECint®2006 = 21.4

SPECint\_base2006 = 19.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Apr-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

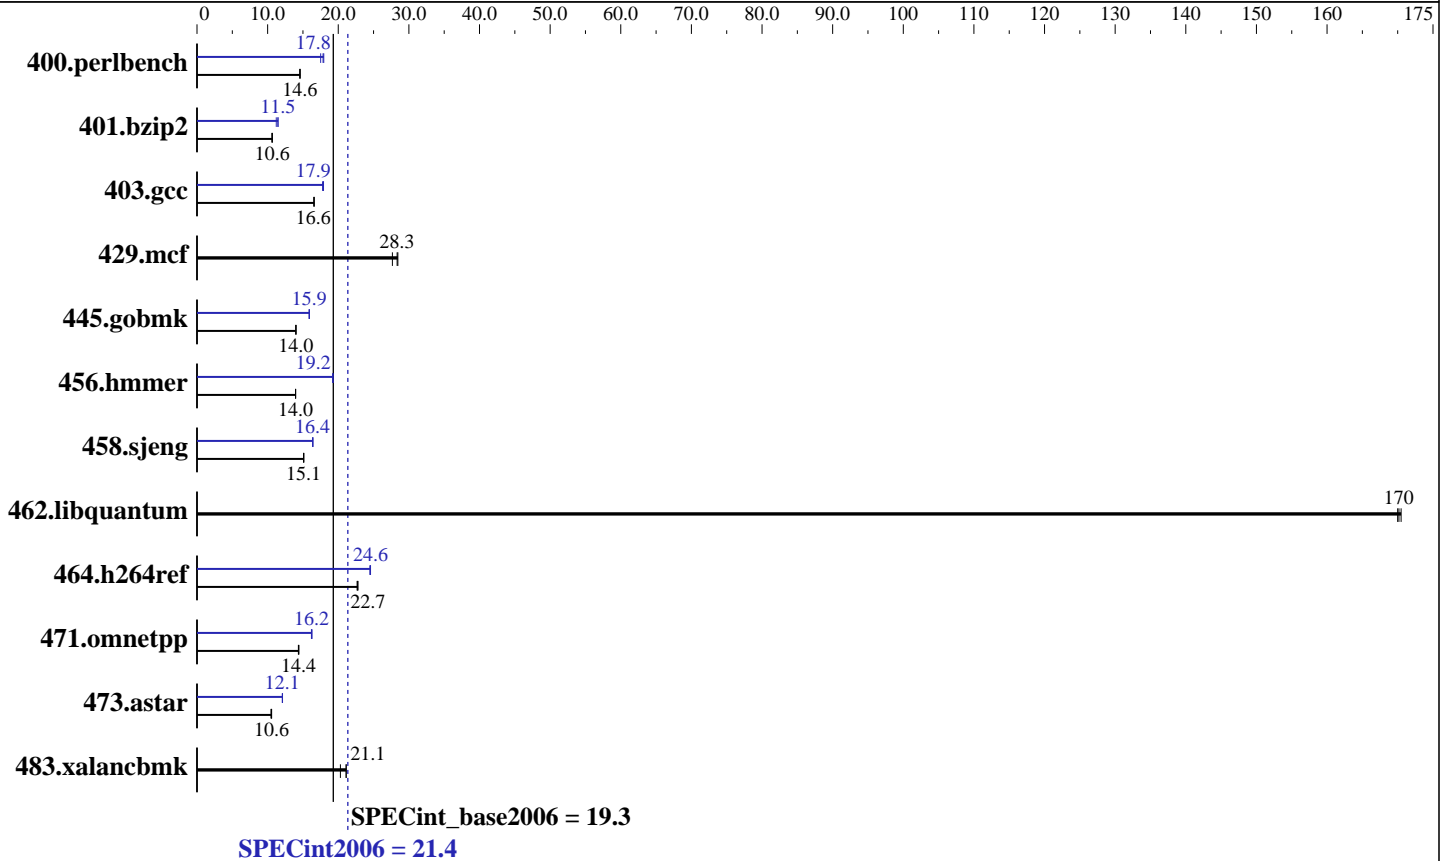

### Hardware

CPU Name: Intel Xeon E5504  
 CPU Characteristics: 2000  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 X 4 GB PC3-8500R running at 800 MHz)  
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 E2  
(Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.4

SPECint\_base2006 = 19.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Apr-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>670</b>	<b>14.6</b>	669	14.6	671	14.6	558	17.5	<b>547</b>	<b>17.8</b>	544	17.9
401.bzip2	904	10.7	909	10.6	<b>906</b>	<b>10.6</b>	860	11.2	841	11.5	<b>842</b>	<b>11.5</b>
403.gcc	486	16.6	485	16.6	<b>486</b>	<b>16.6</b>	453	17.8	<b>450</b>	<b>17.9</b>	449	17.9
429.mcf	330	27.7	321	28.4	<b>322</b>	<b>28.3</b>	330	27.7	321	28.4	<b>322</b>	<b>28.3</b>
445.gobmk	<b>749</b>	<b>14.0</b>	749	14.0	749	14.0	659	15.9	660	15.9	<b>660</b>	<b>15.9</b>
456.hammer	<b>668</b>	<b>14.0</b>	668	14.0	669	14.0	<b>485</b>	<b>19.2</b>	485	19.2	485	19.2
458.sjeng	802	15.1	800	15.1	<b>801</b>	<b>15.1</b>	738	16.4	738	16.4	<b>738</b>	<b>16.4</b>
462.libquantum	122	170	122	170	<b>122</b>	<b>170</b>	122	170	122	170	<b>122</b>	<b>170</b>
464.h264ref	971	22.8	<b>975</b>	<b>22.7</b>	975	22.7	<b>901</b>	<b>24.6</b>	904	24.5	901	24.6
471.omnetpp	433	14.4	<b>434</b>	<b>14.4</b>	435	14.4	386	16.2	384	16.3	<b>385</b>	<b>16.2</b>
473.astar	<b>665</b>	<b>10.6</b>	665	10.6	670	10.5	580	12.1	<b>580</b>	<b>12.1</b>	581	12.1
483.xalancbmk	<b>327</b>	<b>21.1</b>	327	21.1	340	20.3	<b>327</b>	<b>21.1</b>	327	21.1	340	20.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Platform Notes

BIOS setting:  
NUMA configuration : Enabled

## General Notes

The NEC Express5800/R120a-1(Intel Xeon E5504),  
the NEC Express5800/R120a-2(Intel Xeon E5504),  
the Bull NovaScale R440 E2 (Intel Xeon E5504, 2.00 GHz) and  
the Bull NovaScale R460 E2 (Intel Xeon E5504, 2.00 GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/R120a-2(Intel Xeon E5504) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 E2  
(Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.4

SPECint\_base2006 = 19.3

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 E2  
(Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.4

SPECint\_base2006 = 19.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Apr-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch  
401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3  
429.mcf: basepeak = yes  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmarheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib64 -lsmarheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 E2  
(Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.4

SPECint\_base2006 = 19.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Apr-2009  
Hardware Availability: Apr-2009  
Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 00:51:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 May 2009.