



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS


NovaScale R460 E2
(Intel Xeon X5570, 2.93 GHz)

SPECint®2006 = 35.0

SPECint_base2006 = 31.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

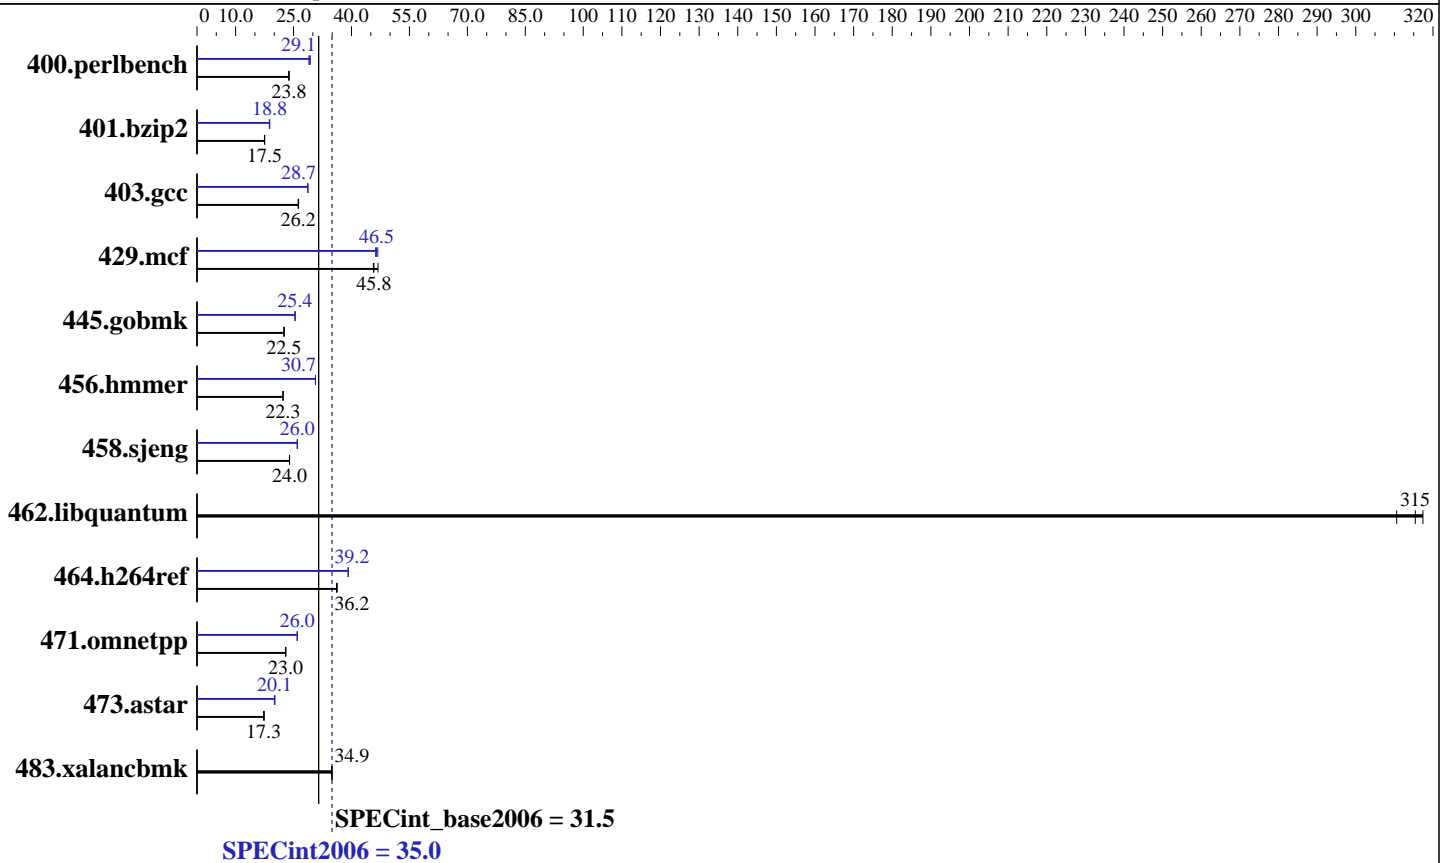

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 X 4 GB PC3-8500R, 2 rank, CL7, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E2
(Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.0

SPECint_base2006 = 31.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	410	23.8	411	23.8	410	23.8	333	29.3	336	29.1	337	29.0
401.bzip2	553	17.5	551	17.5	551	17.5	513	18.8	513	18.8	515	18.7
403.gcc	306	26.3	307	26.2	307	26.2	281	28.7	281	28.7	281	28.7
429.mcf	200	45.7	195	46.9	199	45.8	196	46.5	197	46.2	195	46.8
445.gobmk	466	22.5	465	22.6	466	22.5	413	25.4	413	25.4	413	25.4
456.hammer	419	22.3	419	22.3	419	22.3	304	30.7	304	30.7	304	30.7
458.sjeng	505	24.0	505	24.0	505	24.0	466	26.0	466	26.0	466	26.0
462.libquantum	65.3	317	66.7	311	65.7	315	65.3	317	66.7	311	65.7	315
464.h264ref	611	36.2	610	36.3	612	36.1	565	39.2	565	39.1	565	39.2
471.omnetpp	272	22.9	272	23.0	272	23.0	241	26.0	241	25.9	241	26.0
473.astar	403	17.4	407	17.3	406	17.3	348	20.2	349	20.1	350	20.0
483.xalancbmk	197	35.0	198	34.9	198	34.9	197	35.0	198	34.9	198	34.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Platform Notes

BIOS setting:
NUMA configuration : Enabled

General Notes

The NEC Express5800/R120a-1(Intel Xeon X5570),
the NEC Express5800/R120a-2(Intel Xeon X5570),
the Bull NovaScale R440 E2 (Intel Xeon X5570, 2.93 GHz) and
the Bull NovaScale R460 E2 (Intel Xeon X5570, 2.93 GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/R120a-1(Intel Xeon X5570) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E2
(Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.0

SPECint_base2006 = 31.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc
456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc
C++ benchmarks (except as noted below):
icpc
473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E2
(Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.0

SPECint_base2006 = 31.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmarheap
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmarheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E2
(Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.0

SPECint_base2006 = 31.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:49:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.