



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

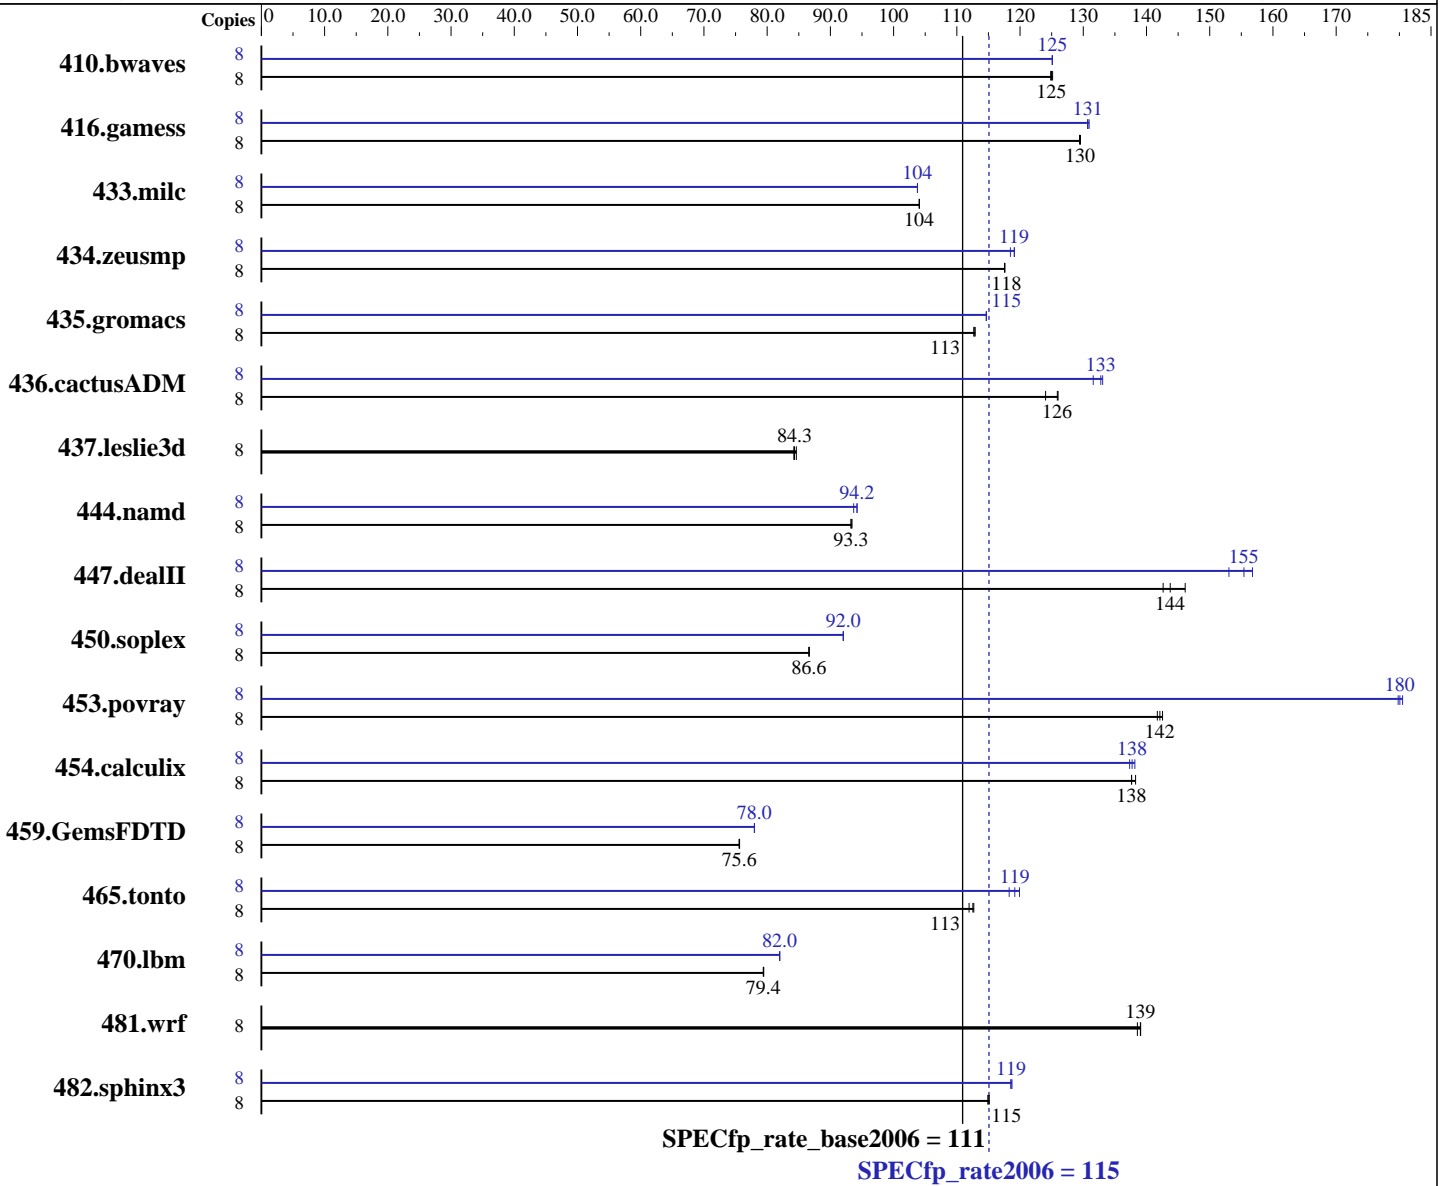

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 800 MHz)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	871	125	869	125	870	125	8	869	125	869	125	869	125
416.gamess	8	1209	130	1209	130	1210	129	8	1196	131	1198	131	1199	131
433.milc	8	706	104	706	104	706	104	8	708	104	708	104	708	104
434.zeusmp	8	619	118	619	118	619	118	8	611	119	614	118	611	119
435.gromacs	8	506	113	507	113	507	113	8	498	115	498	115	498	115
436.cactusADM	8	771	124	759	126	759	126	8	718	133	720	133	727	132
437.leslie3d	8	889	84.6	893	84.2	892	84.3	8	889	84.6	893	84.2	892	84.3
444.namd	8	688	93.3	688	93.3	687	93.4	8	681	94.2	681	94.2	685	93.7
447.dealII	8	642	143	637	144	626	146	8	584	157	589	155	598	153
450.soplex	8	770	86.6	770	86.6	770	86.7	8	725	92.1	725	92.0	725	92.0
453.povray	8	299	142	299	143	300	142	8	237	180	236	180	236	181
454.calculix	8	480	138	479	138	477	138	8	478	138	481	137	479	138
459.GemsFDTD	8	1122	75.6	1123	75.6	1122	75.6	8	1089	78.0	1088	78.0	1088	78.0
465.tonto	8	699	113	703	112	700	113	8	656	120	661	119	666	118
470.lbm	8	1384	79.4	1384	79.4	1383	79.5	8	1341	82.0	1341	82.0	1341	82.0
481.wrf	8	643	139	645	139	643	139	8	643	139	645	139	643	139
482.sphinx3	8	1357	115	1354	115	1356	115	8	1313	119	1315	119	1315	119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge T610 (Intel Xeon E5504, 2.00 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:24:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.