



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 18.2

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = 17.6

CPU2006 license: 13


Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

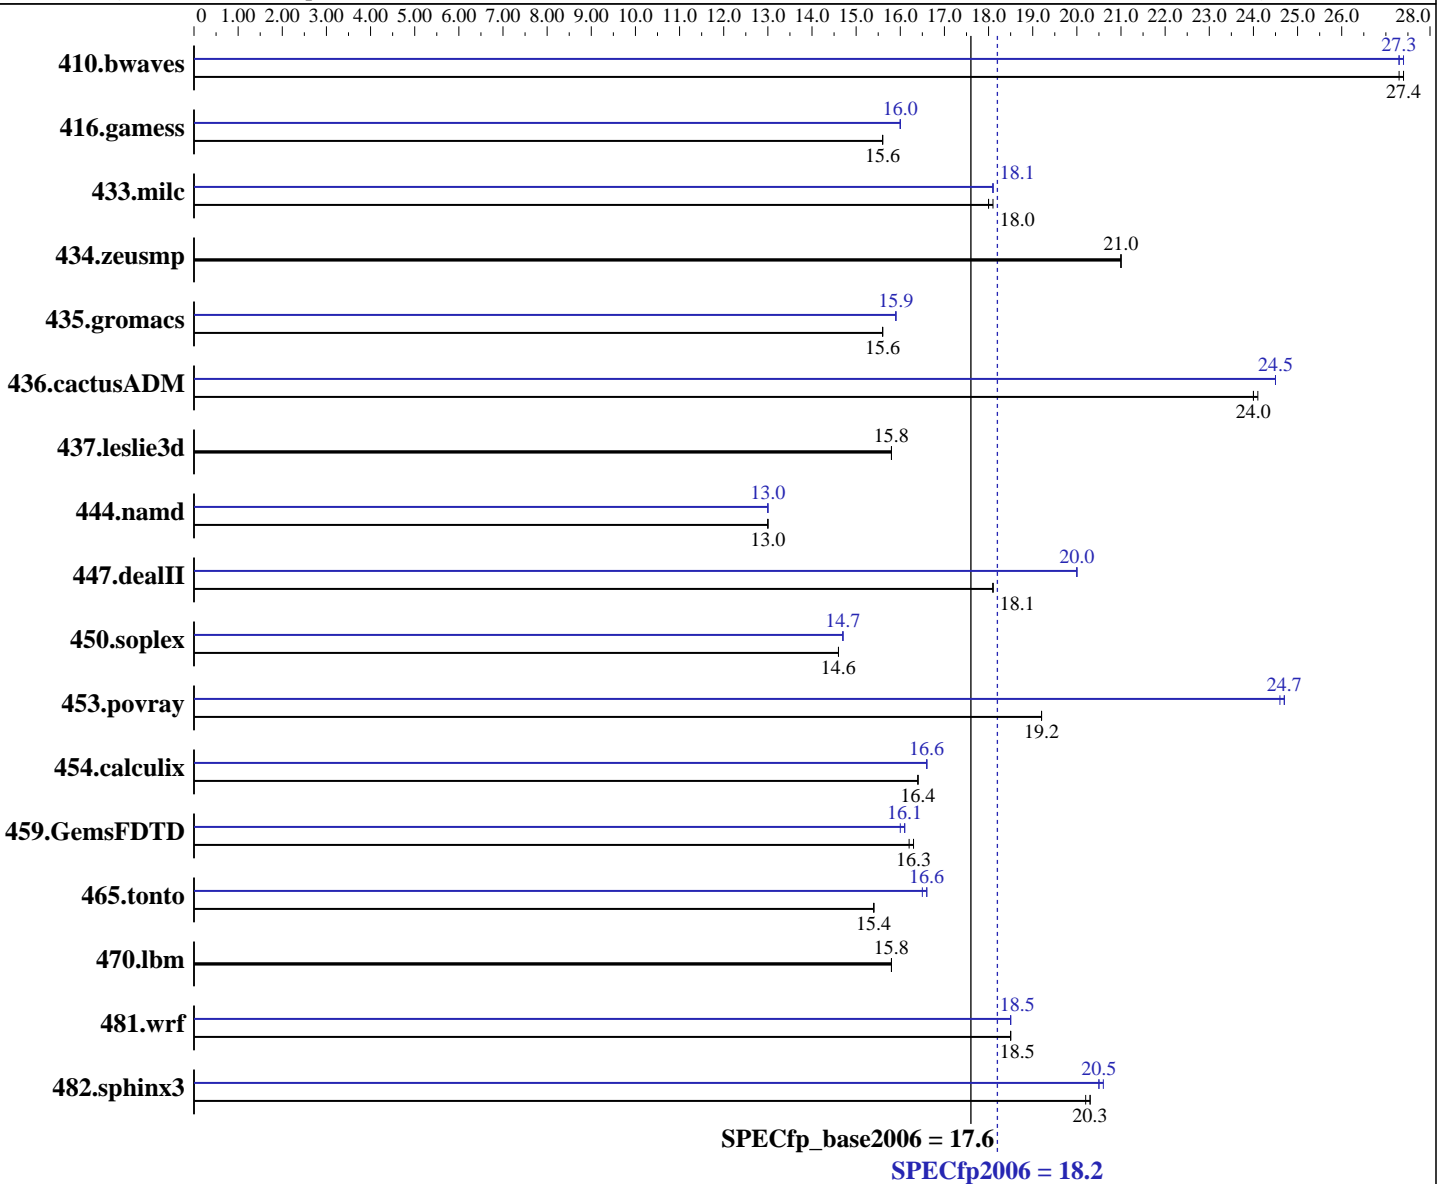

Hardware

CPU Name: Intel Core 2 Duo E7200
 CPU Characteristics:
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 3 MB I+D on chip per chip

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **18.2**

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = **17.6**

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1GB DDR2-800 CL5)
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	496	27.4	496	27.4	497	27.3	498	27.3	497	27.3	496	27.4
416.gamess	1257	15.6	1257	15.6	1256	15.6	1222	16.0	1222	16.0	1222	16.0
433.milc	509	18.0	508	18.1	509	18.0	508	18.1	509	18.1	508	18.1
434.zeusmp	434	21.0	434	21.0	434	21.0	434	21.0	434	21.0	434	21.0
435.gromacs	458	15.6	457	15.6	457	15.6	450	15.9	450	15.9	450	15.9
436.cactusADM	497	24.0	495	24.1	497	24.0	487	24.5	487	24.5	488	24.5
437.leslie3d	595	15.8	597	15.8	596	15.8	595	15.8	597	15.8	596	15.8
444.namd	615	13.0	615	13.0	615	13.0	615	13.0	615	13.0	615	13.0
447.dealII	632	18.1	632	18.1	632	18.1	572	20.0	572	20.0	572	20.0
450.soplex	573	14.6	573	14.6	572	14.6	567	14.7	567	14.7	566	14.7
453.povray	277	19.2	277	19.2	277	19.2	216	24.7	216	24.6	216	24.7
454.calculix	503	16.4	502	16.4	502	16.4	496	16.6	496	16.6	496	16.6
459.GemsFDTD	653	16.3	653	16.3	654	16.2	662	16.0	660	16.1	659	16.1
465.tonto	638	15.4	638	15.4	638	15.4	595	16.5	594	16.6	595	16.6
470.lbm	870	15.8	869	15.8	868	15.8	870	15.8	869	15.8	868	15.8
481.wrf	603	18.5	603	18.5	603	18.5	604	18.5	603	18.5	603	18.5
482.sphinx3	962	20.3	962	20.3	963	20.2	951	20.5	948	20.6	949	20.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 Antec Truepower Trio power supply TP3-650
 Binaries were built on Windows Vista Ultimate (32-bit)
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 18.2

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = 17.6

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

C++ benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 18.2

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = 17.6

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 18.2

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = 17.6

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

416.gamess: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

454.calculix: -QxSSE4.1 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 18.2

Intel DQ45CB motherboard (Intel Core 2 Duo E7200)

SPECfp_base2006 = 17.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:22:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.