



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECint<sup>®</sup>\_rate2006 = 177

### PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

### SPECint\_rate\_base2006 = 140

CPU2006 license: 55


Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

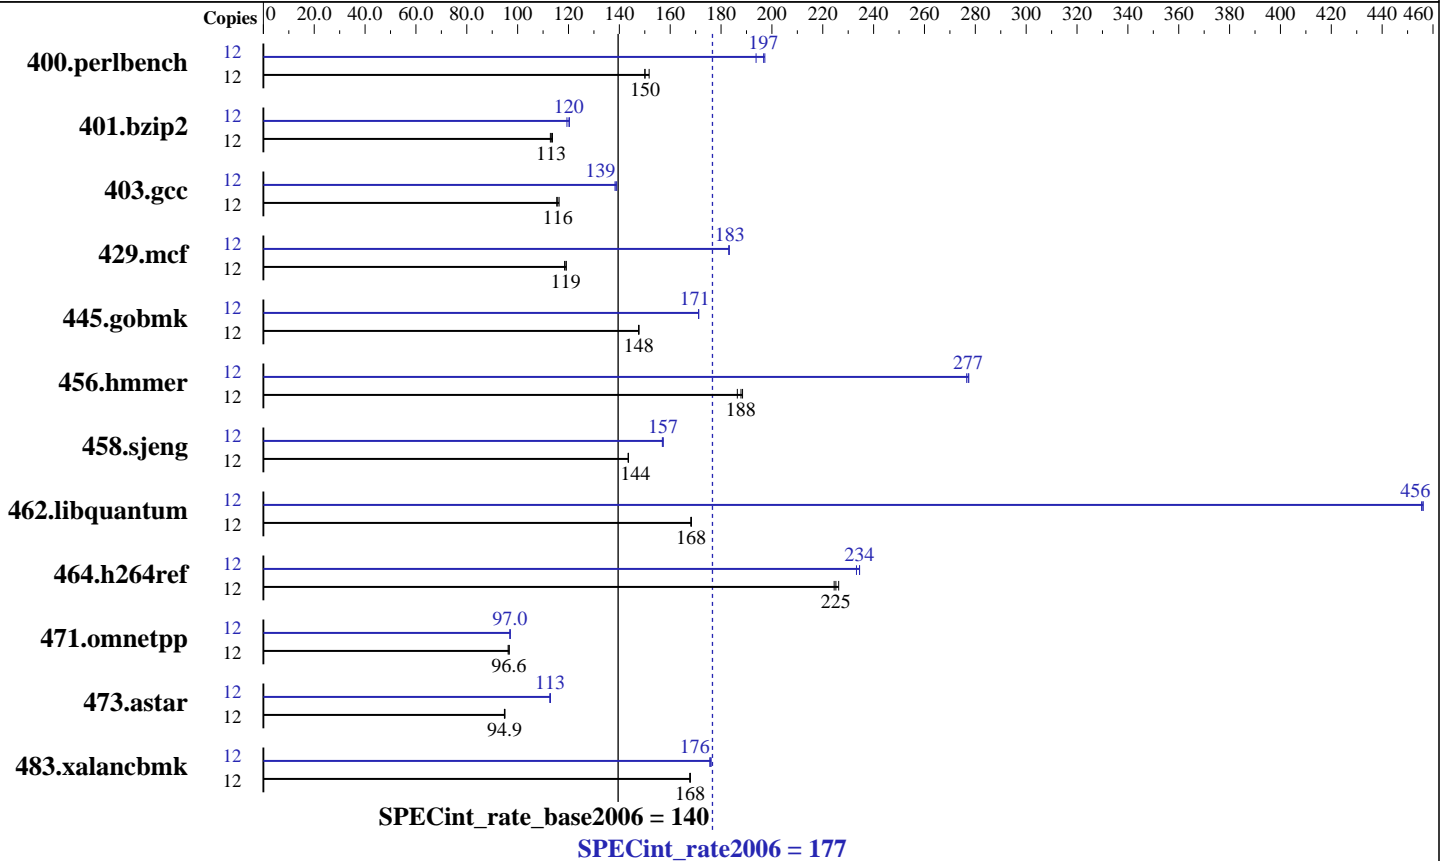

#### Hardware

CPU Name: AMD Opteron 2425 HE  
 CPU Characteristics:  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

#### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 177

PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 140

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jul-2009  
Hardware Availability: Aug-2009  
Software Availability: Apr-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	773	152	781	150	<b>781</b>	<b>150</b>	12	605	194	<b>596</b>	<b>197</b>	594	197
401.bzip2	12	1019	114	<b>1023</b>	<b>113</b>	1026	113	12	970	119	962	120	<b>963</b>	<b>120</b>
403.gcc	12	<b>834</b>	<b>116</b>	831	116	837	115	12	699	138	695	139	<b>697</b>	<b>139</b>
429.mcf	12	924	118	919	119	<b>920</b>	<b>119</b>	12	597	183	598	183	<b>598</b>	<b>183</b>
445.gobmk	12	853	148	853	148	<b>853</b>	<b>148</b>	12	736	171	<b>735</b>	<b>171</b>	735	171
456.hammer	12	<b>596</b>	<b>188</b>	601	186	594	188	12	404	277	405	277	<b>404</b>	<b>277</b>
458.sjeng	12	<b>1011</b>	<b>144</b>	1012	143	1011	144	12	924	157	925	157	<b>924</b>	<b>157</b>
462.libquantum	12	1477	168	1479	168	<b>1477</b>	<b>168</b>	12	<b>545</b>	<b>456</b>	545	456	546	456
464.h264ref	12	1174	226	<b>1179</b>	<b>225</b>	1183	224	12	<b>1133</b>	<b>234</b>	1133	234	1138	233
471.omnetpp	12	776	96.6	<b>776</b>	<b>96.6</b>	779	96.3	12	773	97.0	<b>773</b>	<b>97.0</b>	773	97.1
473.astar	12	889	94.8	<b>888</b>	<b>94.9</b>	887	95.0	12	748	113	<b>747</b>	<b>113</b>	746	113
483.xalancbmk	12	494	168	<b>493</b>	<b>168</b>	493	168	12	<b>471</b>	<b>176</b>	472	176	470	176

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 177

PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 140

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):  
openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 177

PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 140

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 177

PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 140

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
 -CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint  
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
 -OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
 -Msafeptr=global -Mfprelaxed --zc\_eh -tp shanghai-32  
 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 177

PowerEdge 2970 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint\_rate\_base2006 = 140

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- [http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:37:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 July 2009.