



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 81.6

IBM System x iDataPlex dx340 (Intel Xeon L5240)

SPECint\_rate\_base2006 = 76.6

CPU2006 license: 11


Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

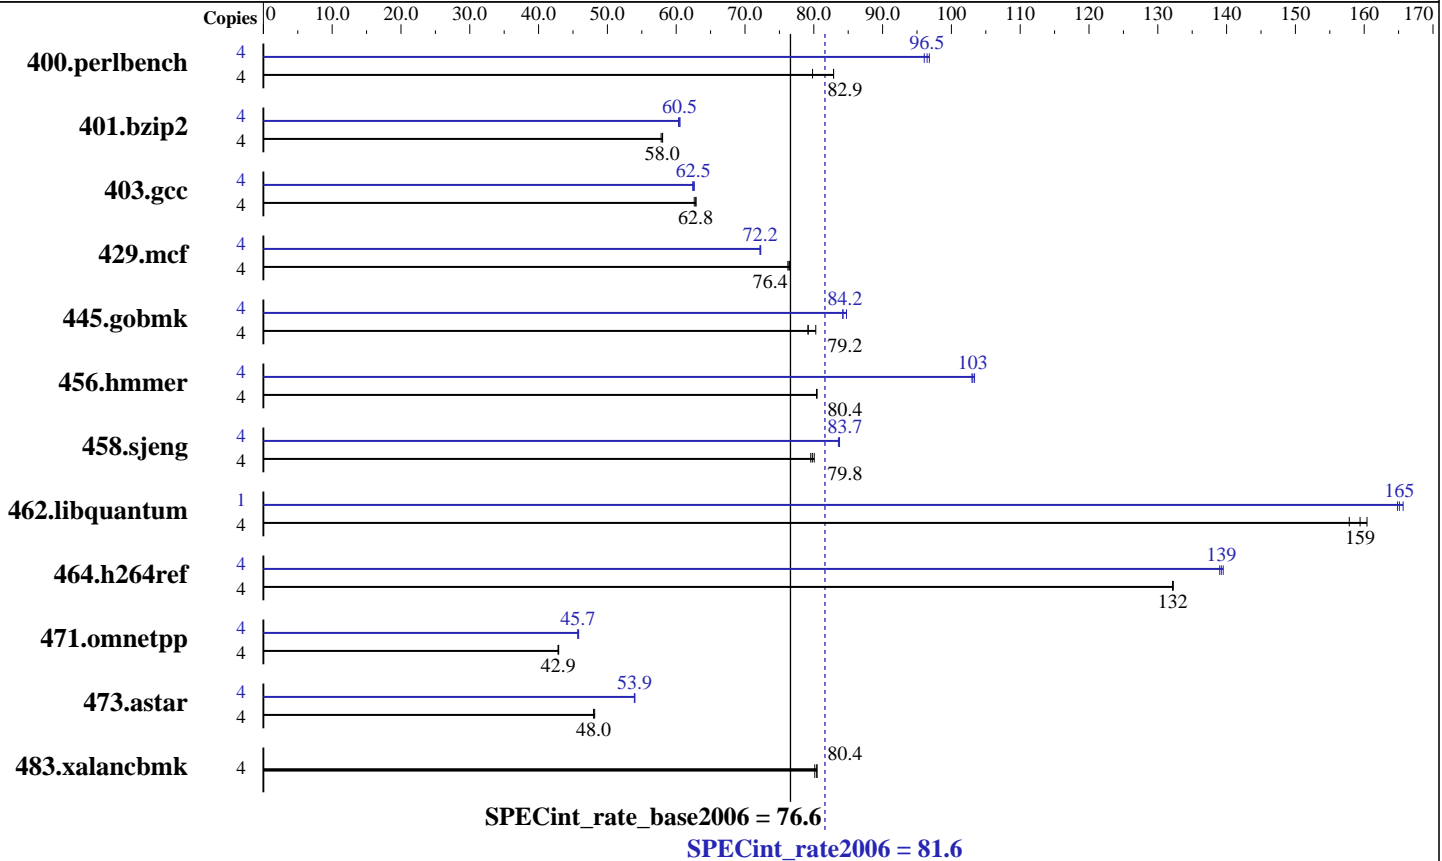

### Hardware

CPU Name: Intel Xeon L5240  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB PC2-5300F ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10(x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l\_cproc\_p\_11.0.066  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint\_rate2006 = 81.6

IBM System x iDataPlex dx340 (Intel Xeon L5240)

SPECint\_rate\_base2006 = 76.6

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	490	79.8	472	82.9	<u>472</u>	<u>82.9</u>	4	404	96.8	<u>405</u>	<u>96.5</u>	407	96.1
401.bzip2	4	668	57.8	665	58.0	<u>666</u>	<u>58.0</u>	4	638	60.5	<u>638</u>	<u>60.5</u>	640	60.3
403.gcc	4	514	62.6	<u>512</u>	<u>62.8</u>	512	62.9	4	514	62.6	<u>515</u>	<u>62.5</u>	516	62.4
429.mcf	4	479	76.2	<u>478</u>	<u>76.4</u>	477	76.5	4	505	72.2	505	72.3	<u>505</u>	<u>72.2</u>
445.gobmk	4	530	79.2	<u>530</u>	<u>79.2</u>	523	80.3	4	498	84.2	<u>498</u>	<u>84.2</u>	495	84.8
456.hammer	4	464	80.4	<u>464</u>	<u>80.4</u>	464	80.5	4	<u>362</u>	<u>103</u>	362	103	361	103
458.sjeng	4	<u>607</u>	<u>79.8</u>	608	79.6	605	80.1	4	579	83.6	<u>578</u>	<u>83.7</u>	578	83.7
462.libquantum	4	525	158	<u>520</u>	<u>159</u>	517	160	1	125	166	126	165	<u>125</u>	<u>165</u>
464.h264ref	4	<u>670</u>	<u>132</u>	669	132	670	132	4	637	139	<u>636</u>	<u>139</u>	634	140
471.omnetpp	4	<u>583</u>	<u>42.9</u>	582	42.9	583	42.8	4	547	45.7	546	45.8	<u>547</u>	<u>45.7</u>
473.astar	4	583	48.2	<u>585</u>	<u>48.0</u>	585	48.0	4	<u>521</u>	<u>53.9</u>	520	54.0	521	53.9
483.xalancbmk	4	<u>343</u>	<u>80.4</u>	343	80.5	344	80.1	4	<u>343</u>	<u>80.4</u>	343	80.5	344	80.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

```

taskset was used to bind processes to cores except
for 462.libquantum peak
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
Hardware Prefetcher Enable and Adjacent Cache Line Prefetch Enable

```

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 81.6

IBM System x iDataPlex dx340 (Intel Xeon L5240)

SPECint\_rate\_base2006 = 76.6

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 81.6

IBM System x iDataPlex dx340 (Intel Xeon L5240)

SPECint\_rate\_base2006 = 76.6

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -par-runtime-control  
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 81.6

IBM System x iDataPlex dx340 (Intel Xeon L5240)

SPECint\_rate\_base2006 = 76.6

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:11:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 August 2009.