



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55


Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

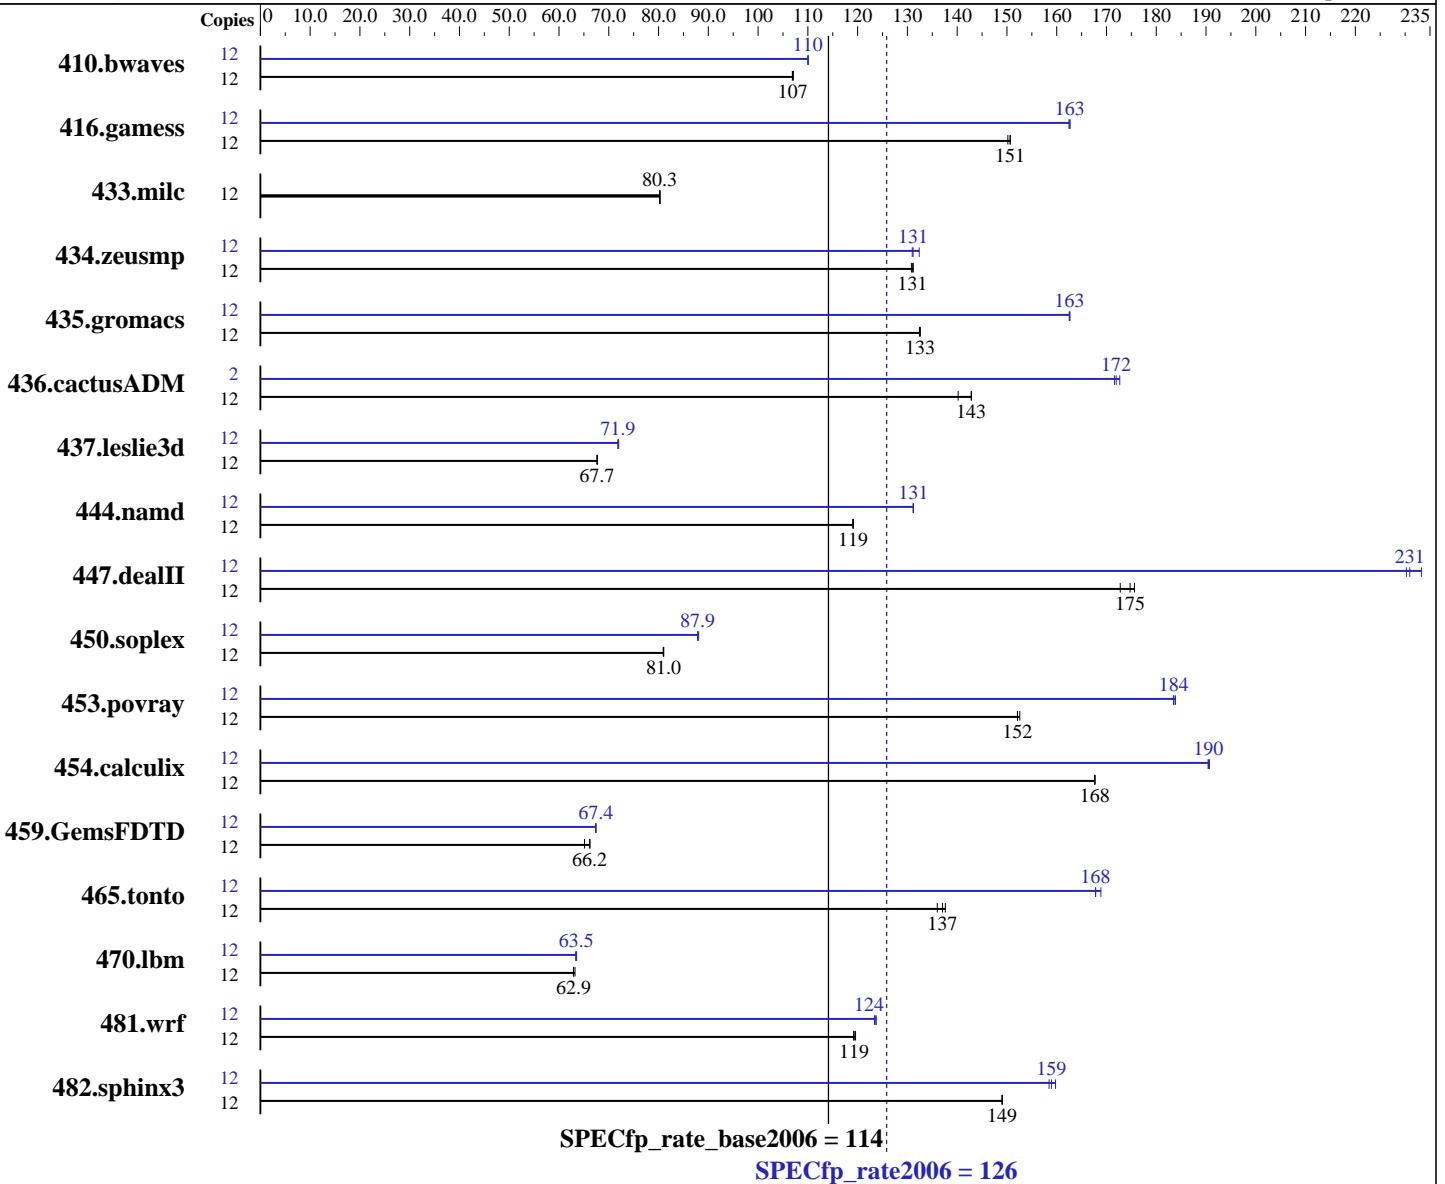

Hardware

CPU Name: AMD Opteron 2423 HE
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	<u>1525</u>	<u>107</u>	1526	107	1523	107	12	<u>1482</u>	<u>110</u>	1483	110	1481	110
416.gamess	12	1564	150	<u>1560</u>	<u>151</u>	1559	151	12	1446	162	1445	163	<u>1445</u>	<u>163</u>
433.milc	12	1373	80.2	1372	80.3	<u>1373</u>	<u>80.3</u>	12	1373	80.2	1372	80.3	<u>1373</u>	<u>80.3</u>
434.zeusmp	12	832	131	<u>834</u>	<u>131</u>	835	131	12	825	132	834	131	<u>833</u>	<u>131</u>
435.gromacs	12	647	132	<u>646</u>	<u>133</u>	646	133	12	527	163	<u>527</u>	<u>163</u>	527	163
436.cactusADM	12	<u>1004</u>	<u>143</u>	1023	140	1004	143	2	138	173	<u>139</u>	<u>172</u>	139	172
437.leslie3d	12	1665	67.7	<u>1667</u>	<u>67.7</u>	1668	67.6	12	1567	72.0	1570	71.9	<u>1570</u>	<u>71.9</u>
444.namd	12	808	119	<u>808</u>	<u>119</u>	809	119	12	734	131	<u>733</u>	<u>131</u>	733	131
447.dealII	12	782	176	795	173	<u>786</u>	<u>175</u>	12	589	233	596	230	<u>594</u>	<u>231</u>
450.soplex	12	1235	81.0	<u>1235</u>	<u>81.0</u>	1237	80.9	12	<u>1139</u>	<u>87.9</u>	1139	87.9	1137	88.1
453.povray	12	420	152	418	153	<u>420</u>	<u>152</u>	12	<u>348</u>	<u>184</u>	347	184	348	183
454.calculix	12	<u>590</u>	<u>168</u>	590	168	591	168	12	519	191	<u>520</u>	<u>190</u>	520	190
459.GemsFDTD	12	1923	66.2	<u>1924</u>	<u>66.2</u>	1955	65.1	12	1888	67.4	<u>1889</u>	<u>67.4</u>	1890	67.3
465.tonto	12	858	138	868	136	<u>862</u>	<u>137</u>	12	699	169	704	168	<u>704</u>	<u>168</u>
470.lbm	12	2608	63.2	2622	62.9	<u>2620</u>	<u>62.9</u>	12	<u>2598</u>	<u>63.5</u>	2602	63.4	2595	63.5
481.wrf	12	1125	119	1121	120	<u>1123</u>	<u>119</u>	12	1086	123	1083	124	<u>1085</u>	<u>124</u>
482.sphinx3	12	<u>1569</u>	<u>149</u>	1570	149	1569	149	12	1464	160	1476	158	<u>1471</u>	<u>159</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html>

<http://www.spec.org/cpu2006/flags/amd-platform.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:13:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.