



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon X3360)

SPECint[®]2006 = 26.9

SPECint_base2006 = 23.8

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

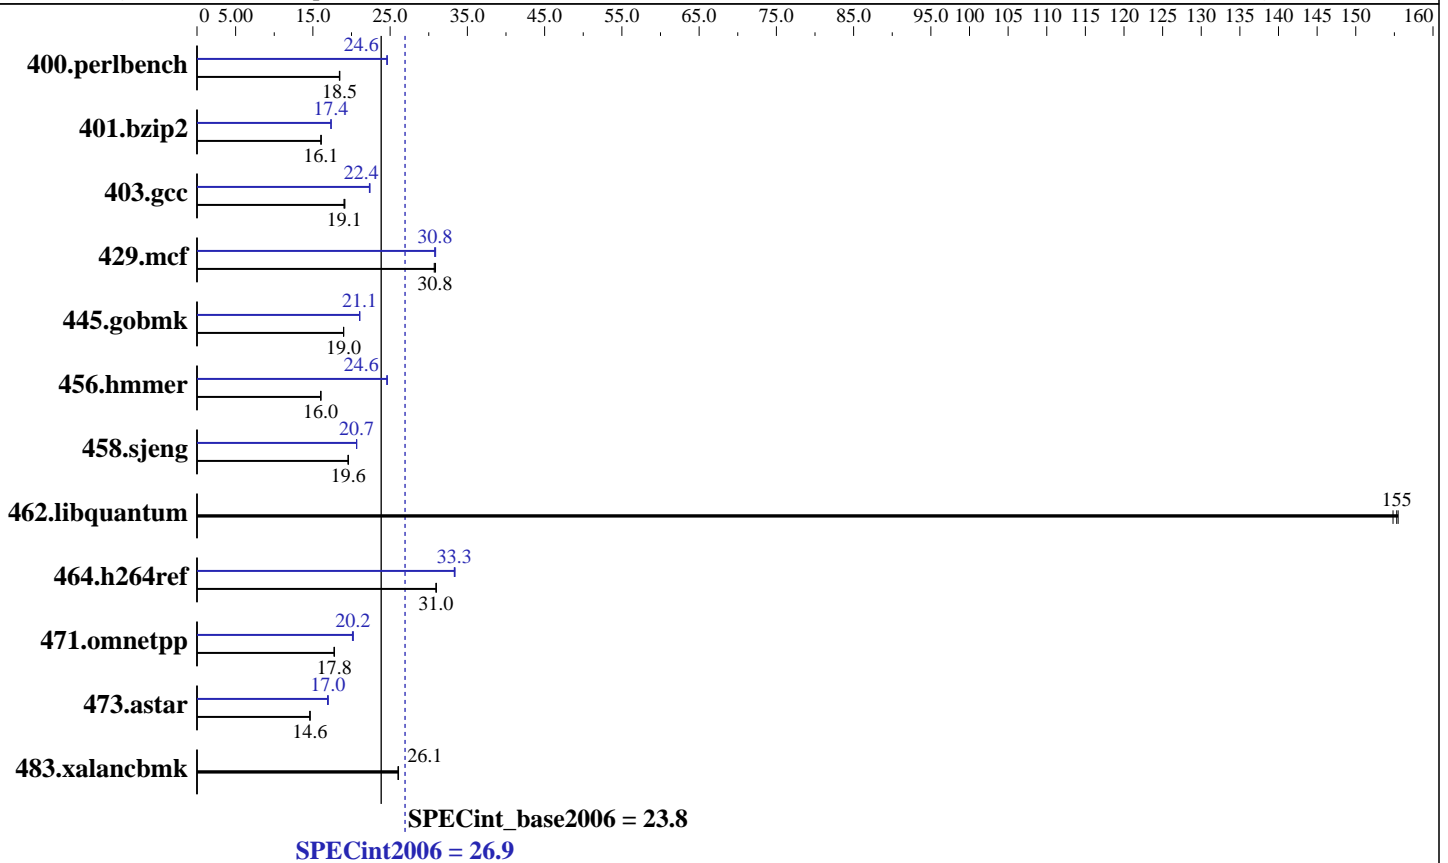

Hardware

CPU Name: Intel Xeon X3360
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
 Disk Subsystem: 1x160 GB SATA2, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon X3360)

SPECint2006 = 26.9

SPECint_base2006 = 23.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	530	18.4	529	18.5	<u>529</u>	<u>18.5</u>	<u>397</u>	<u>24.6</u>	397	24.6	397	24.6
401.bzip2	600	16.1	602	16.0	<u>601</u>	<u>16.1</u>	556	17.4	557	17.3	<u>556</u>	<u>17.4</u>
403.gcc	420	19.1	423	19.0	<u>422</u>	<u>19.1</u>	<u>360</u>	<u>22.4</u>	360	22.4	361	22.3
429.mcf	297	30.7	<u>296</u>	<u>30.8</u>	295	30.9	<u>296</u>	<u>30.8</u>	296	30.8	295	30.9
445.gobmk	553	19.0	<u>553</u>	<u>19.0</u>	553	19.0	<u>498</u>	<u>21.1</u>	498	21.1	498	21.0
456.hmmer	582	16.0	582	16.0	<u>582</u>	<u>16.0</u>	379	24.6	380	24.6	<u>379</u>	<u>24.6</u>
458.sjeng	617	19.6	619	19.5	<u>618</u>	<u>19.6</u>	586	20.6	<u>586</u>	<u>20.7</u>	585	20.7
462.libquantum	134	155	133	155	<u>133</u>	<u>155</u>	134	155	133	155	<u>133</u>	<u>155</u>
464.h264ref	714	31.0	<u>715</u>	<u>31.0</u>	715	30.9	<u>664</u>	<u>33.3</u>	662	33.4	664	33.3
471.omnetpp	351	17.8	352	17.7	<u>352</u>	<u>17.8</u>	309	20.2	<u>309</u>	<u>20.2</u>	311	20.1
473.astar	480	14.6	480	14.6	<u>480</u>	<u>14.6</u>	<u>414</u>	<u>17.0</u>	415	16.9	413	17.0
483.xalancbmk	264	26.1	<u>265</u>	<u>26.1</u>	265	26.0	264	26.1	<u>265</u>	<u>26.1</u>	265	26.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 26.9

Express5800/R110a-1
(Intel Xeon X3360)

SPECint_base2006 = 23.8

CPU2006 license: 9006

Test date: Jul-2009

Test sponsor: NEC Corporation

Hardware Availability: May-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap_8.1/lib -lsmarheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/069/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/069/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/069/ipp/em64t/include
```

```
456.hmmer: /opt/intel/Compiler/11.0/069/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/069/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/069/ipp/em64t/include
```

C++ benchmarks:

icpc

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
401.bzip2: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon X3360)

SPECint2006 = 26.9

SPECint_base2006 = 23.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmr: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revG.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revG.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml>

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 4



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110a-1
(Intel Xeon X3360)

SPECint2006 = 26.9

SPECint_base2006 = 23.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:32:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 August 2009.